

TITLE : NV140FHM-N66**Customer : Timi****Product Specification****Rev. P1****BOE Optoelectronics Technology Co., Ltd**

SPEC. NUMBER

PRODUCT GROUP

Rev.

ISSUE DATE

PAGE

www.szguangzhuo.com 广卓液晶屏 echodeng61@hotmail.com jimeijimeihk.com +86-13411884959

TFT-LCD

P1

2020.02.24

1 OF 61

Customer Spec

P1

2020.02.24

REVISION HISTORY

 Preliminary Specification Final Specification

Revision No.	Page	Description of Changes	Date	Prepared
P0	61	Preliminary Specification	2019.10.11	Gao Xueqiang
P1	61	EDID、Outline图纸更新	2020.02.24	Gao Xueqiang

REVIEWED

Designer

Manager

Pu Xun (Array)

Wang Wu

Pan Ruiqi(Celi)

Hu Jingyong

Peng Yuanhong(CF)

Li Min

Shen Can(EE)

Xu Bo

Zhang Zhong(MO)

Li Yucheng

Luo Jiniang(QE)

Cui Chaoyang

Wang Yu(PI)

Chen Gang

APPROVED

Gao Xueqiang(PM)

SPEC. NUMBER

SPEC. TITLE

PAGE

www.szguangzhuo.com 广卓液晶屏 echodeng61@hotmail.com jimei@jimeihk.com +86-13411884959

NV140FHM-N66 Product Specification Rev. P1

2 OF 61

Contents

No.	Items	Page
1.0	General Description	4
2.0	Absolute Maximum Ratings	6
3.0	Electrical Specifications	7
4.0	Optical Specifications	11
5.0	Interface Connection	16
6.0	Signal Timing Specification	20
7.0	Input Signals, Display Colors & Gray Scale of Colors	25
8.0	Power Sequence	26
9.0	Connector Description	27
10.0	Mechanical Characteristics	28
11.0	Reliability Test	29
12.0	Handling & Cautions	29
13.0	Label	30
14.0	Packing Information	32
15.0	Mechanical Outline Dimension	33
16.0	EDID Table	35

1.0 GENERAL DESCRIPTION

1.1 Introduction

NV140FHM-N66 V8.0 is a color active matrix TFT LCD module using amorphous silicon TFT's (Thin Film Transistors) as an active switching devices. This module has a 14.0 inch diagonally measured active area with Full-HD resolutions (1920 horizontal by 1080 vertical pixel array). Each pixel is divided into RED, GREEN, BLUE dots which are arranged in vertical stripe and this module can display 16.2M(6bit+FRC) colors and color gamut sRGB 100% Typ. 96.0% Mir. The TFT-LCD panel used for this module is a low reflection and higher color type. Therefore, this module is suitable for Notebook PC. The LED driver for back-light driving is built in this module.

All input signals are eDP1.2 interface compatible.

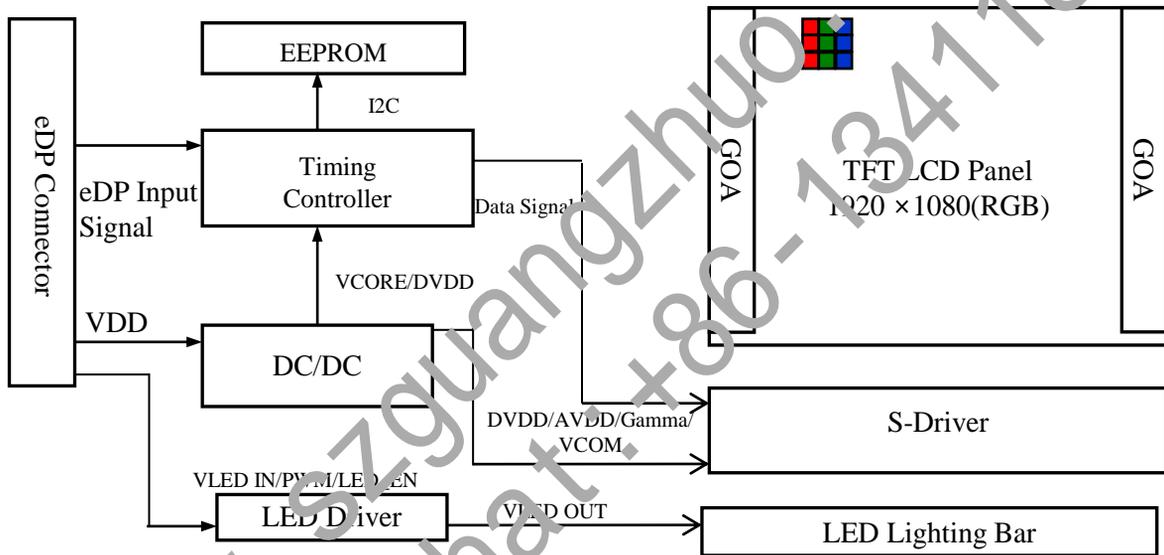


Figure 1. Drive Architecture

1.2 Features

- 2 lane eDP interface with 2.7Gbps link rates
- Thin and light weight
- 16.2M(6bit+FRC) color depth, gamut sRGB 100%
- Single LED lighting bar (Bottom side/Horizontal Direction)
- Data enable signal mode
- Side mounting frame
- Green product (RoHS & Halogen free product)
- On board LED driving circuit
- Low driving voltage and low power consumption
- On board EDID chip
- DPCD Version 1.1
- Adjust backlight brightness with DC mode
- Function : BIST/FRC

Customer Spec

P1

2020.02.24

1.3 Application

- Notebook PC (Wide type)

1.4 General Specification

The followings are general specifications at the model NV140FHM-N66 V8.0. (listed in Table 1)

<Table 1. General Specifications>

Parameter	Specification	Unit	Remarks
Active area	309.312(H) × 173.988(V)	mm	
Number of pixels	1920 (H) × 1080 (V)	pixels	
Pixel pitch	161.1(H) × 161.1(V)	um	
Pixel arrangement	RGB Vertical stripe		
Display colors	16.2M(6bit+FRC)		
Color gamut	sRGB 97.4%		
Display mode	Normally Black		
Dimensional outline	314.31±0.3 (H) × 183.59±0.3 (V) × 2.4(max) W/O PCB 314.21±0.3 (H) × 191.09±0.5 (V) × 2.6(max) W/ PCB	mm	
Weight	220(max)	g	
Surface treatment	Anti-Glare		
Surface hardness	2H		
Back-light	Bottom edge side, 1-LED lighting bar type		Note 1
Power consumption	P _D : 0.75 max	W	@Mosaic
	P _{BL} : 2.9 max	W	
	P _{Total} : 3.65 max	W	@Mosaic

Notes : 1. LED Lighting Bar (50*LED Array)

2.0 ABSOLUTE MAXIMUM RATINGS

The followings are maximum values which, if exceed, may cause faulty operation or damage to the unit. The operational and non-operational maximum voltage and current values are listed in Table 2.

< Table 2. Absolute Maximum Ratings >

Ta=25+/-2°C


Parameter	Symbol	Min.	Max.	Unit	Remarks
Power Supply Voltage	V _{DD}	-0.3	4.0	V	
eDP input Voltage	V _{eDP}	0	2.0	V	Note 1
Logic Supply Voltage	V _{IN}	V _{SS} -0.3	V _{DD} +0.3	V	
Operating Temperature	T _{OP}	0	+50	°C	Note 2
Storage Temperature	T _{ST}	-20	+60	°C	

Notes :

1. Permanent damage to the device may occur if maximum values are exceeded functional operation should be restricted to the condition described under normal operating conditions.

2. Temperature and relative humidity range are shown in the figure below.

90 % RH Max. (40 °C ≥ Ta) Maximum wet - bulb temperature at 39 °C or less. (Ta > 40 °C) No condensation.

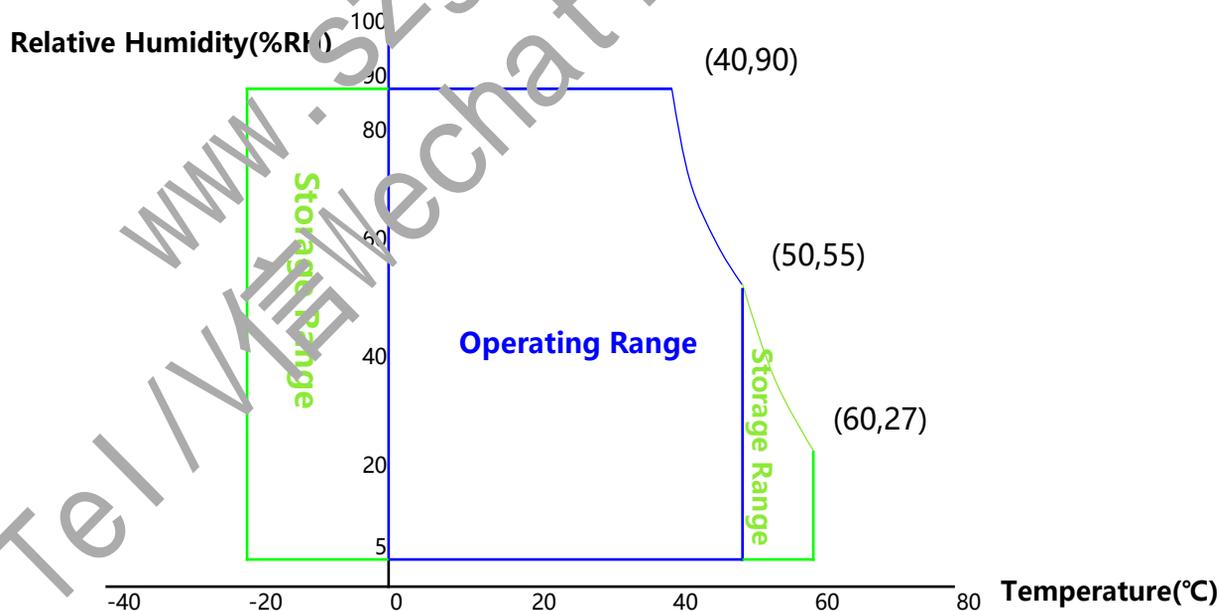

Customer Spec

P1

2020.02.24

3.0 ELECTRICAL SPECIFICATIONS

3.1 Electrical Specifications

< Table 3. Electrical Specifications >

Ta=25+/-2°C

Parameter		Min.	Typ.	Max.	Unit	Remarks	
Power Supply Voltage	V _{DD}	3.0	3.3	3.6	V	Note 1	
Permissible Input Ripple Voltage	V _{RF}	-10% VDD	-	+10% VDD	V	Note 4	
BIST Control Level	High Level	2	-	3.3	V	@VDDIO=1.8 V	
	Low Level	0	-	0.2	V		
Power Supply Inrush Current	Inrush	-	-	2	A	Note3	
Power Supply Current	Mosaic	I _{DD}	-	-	228	mA	Note 1
	RGB		-	-	364	mA	
Power Consumption	Mosaic	P _M	-	-	0.75	W	
	RGB	P _{RGB}	-	-	1.2	W	
	BLU	P _{BL}	-	-	2.9	W	Note 2
	Total	P _{Total}	-	-	3.65	W	@Mosaic


3.0 ELECTRICAL SPECIFICATIONS

3.1 Electrical Specifications

Notes :

1. The supply voltage is measured and specified at the interface connector of LCM.
The current draw and power consumption specified is for 3.3V at 25 °C.

- a) Mosaic pattern 8*8
- b) R/G/B patterns



(a)



(b)

Figure 3. Power Measure Patterns.

2. Calculated value for reference ($V_{LED} \times I_{LED}$)

3. Measure condition (Figure 4)

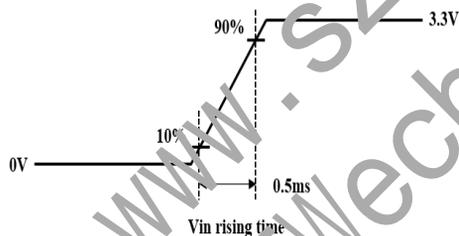


Figure 4. Inrush Measure Condition

4. Input voltage range: 3.0~3.6V. Test condition: Oscilloscope bandwidth 20MHz, AC coupling

3.2 Backlight Unit

< Table 4. LED Driving Guideline Specifications >

Ta=25+/-2°C

Parameter		Min.	Typ.	Max.	Unit	Remarks
LED Forward Voltage		V_F	-	-	2.813	V
LED Forward Current		I_F	-	17.3	-	mA
LED Power Consumption		P_{LED}	-	-	2.9	W Note 1
LED Life-Time		N/A	15,000	-	-	Hour $I_F = 7.3mA$ Note 2
Power Supply Voltage for LED Driver		V_{LED}	5	12	21	V
Power Supply Voltage for LED Driver Inrush		I_{LED} inrush	-	-	2.0	A Note 4
EN Control Level	Backlight On	V_{BL_EN}	2.5	-	5.0	V
	Backlight Off		0	-	0.5	V
PWM Control Level	High Level	V_{IL_PWM}	2.5	-	5.0	V
	Low Level		0	-	0.5	V
PWM Control Frequency		F_{PWM}	200	-	2,000	Hz
Duty Ratio			1	-	100	% Note 3

Notes :

1. Power supply voltage 12V for LED driver.

Calculator value for reference $I_F \times V_F \times 50 / \text{driver efficiency} = P_{LED}$

2. The LED life-time define as the estimated time to 50% degradation of initial luminous.

3. 1% duty cycle is achievable with a dimming frequency less than 2KHz.

4. Measure condition (Figure 5)

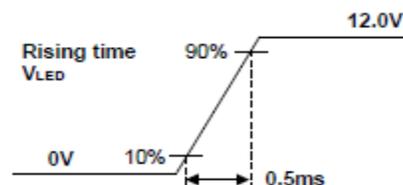


Figure 5. Inrush Measure Condition

3.3 LED Structure

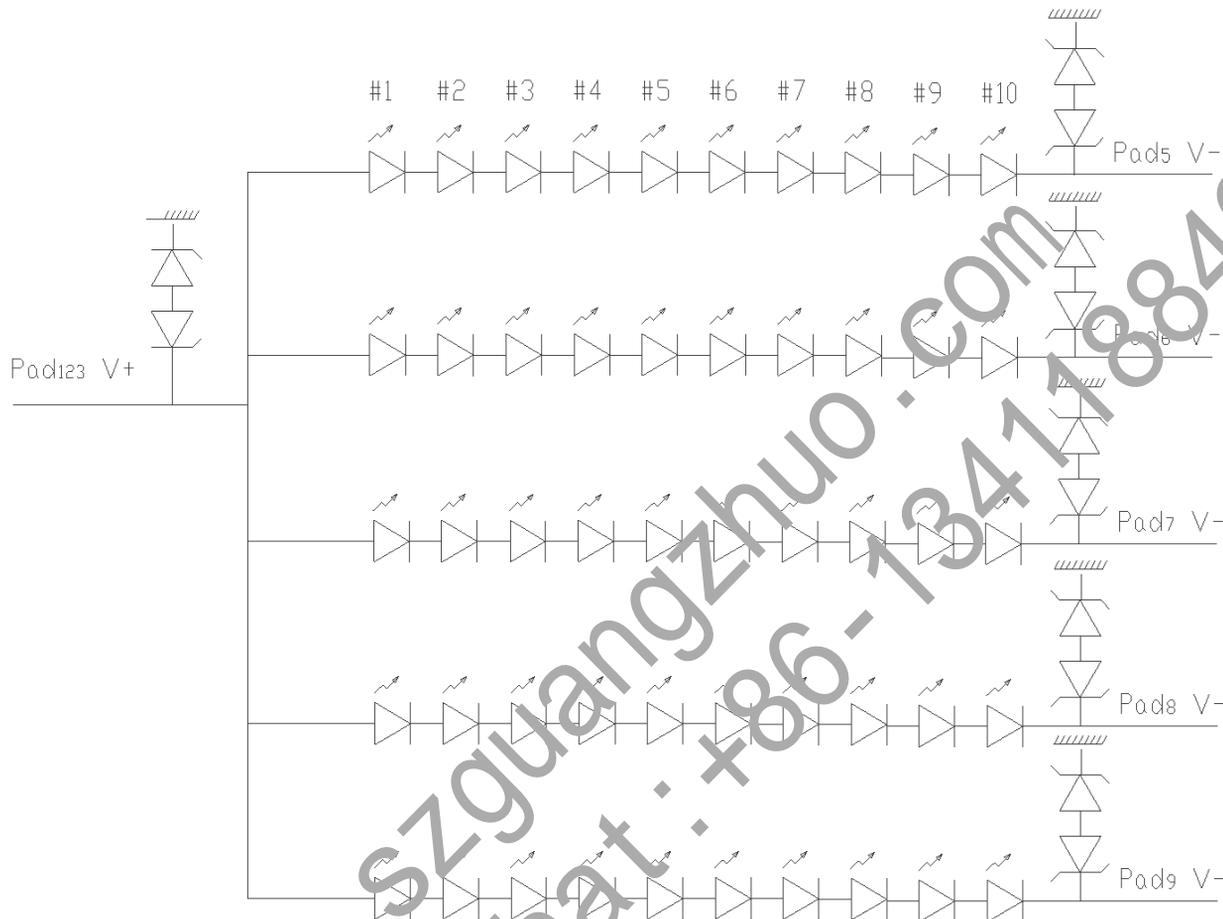


Figure 6. LED Structure

Customer Spec

P1

2020.02.24

4.0 OPTICAL SPECIFICATION

4.1 Overview

The test of optical specifications shall be measured in a dark room (ambient luminance ≤ 1 lux and temperature = $25 \pm 2^\circ\text{C}$) with the equipment of luminance meter system (PR730&PR810) and test unit shall be located at an approximate distance 50cm from the LCD surface at a viewing angle of θ and ϕ equal to 0° . We refer to $\theta=0$ ($=\theta_3$) as the 3 o'clock direction (the "right"), $\theta=90$ ($=\theta_{12}$) as the 12 o'clock direction ("upward"), $\theta=180$ ($=\theta_9$) as the 9 o'clock direction ("left") and $\theta=270$ ($=\theta_6$) as the 6 o'clock direction ("bottom"). While scanning θ and/or ϕ , the center of the measuring spot on the display surface shall stay fixed. The backlight should be operating for 30 minutes prior to measurement. VDD shall be $3.3 \pm 0.3\text{V}$ at 25°C . Optimum viewing angle direction is 6 o'clock.

4.2 Optical Specifications

<Table 5. Optical Specifications>

Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit	Remark
Viewing Angle Range	Horizontal	θ_3	CR > 10	80	89	-	Deg.	Note 1
		θ_9		80	89	-	Deg.	
	Vertical	θ_{12}		80	89	-	Deg.	
		θ_6		80	89	-	Deg.	
Luminance Contrast Ratio		CR	$\theta = 0^\circ$	600	800	-		Note 2
Luminance of White	5 Points	L_w	$\theta = 0^\circ$ $I_{LED} = 18.9\text{mA}$	255	300	375	cd/m ²	Note 3
White Luminance Uniformity	5 Points	ΔY_5		80	-	-		Note 4
	13 Points	ΔY_{13}		65	-	-		
White Chromaticity		$\frac{W_x}{W_y}$	$\theta = 0^\circ$	0.276	0.306	0.336		0.283
		$\frac{W_z}{W_y}$		0.288	0.318	0.348		0.299
Reproduction of Color	Red	R_x	$\theta = 0^\circ$	-0.03	0.641	+0.03		-0.03
		R_y			0.326			
	Green	G_x			0.297			
		G_y			0.607			
	Blue	B_x			0.152			
		B_y			0.061			
Color Gamut				sRGB 96%	Typ100%	-	-	sRGB
Response Time (Rising + Falling)		T_{RT}	$T_a = 25^\circ\text{C}$ $\theta = 0^\circ$	-	20	25	ms	Note 6
Cross Talk		CT	$\theta = 0^\circ$	-	-	2.0	%	Note 7


Notes :

- Viewing angle is the angle at which the contrast ratio is greater than 10. The viewing angles are determined for the horizontal or 3, 9 o'clock direction and the vertical or 6, 12 o'clock direction with respect to the optical axis which is normal to the LCD surface (see Figure 7).
- Contrast measurements shall be made at viewing angle of $\Theta = 0$ and at the center of the LCD surface. Luminance shall be measured with all pixels in the view field set first to white, then to the dark (black) state. (see Figure 7) Luminance Contrast Ratio (CR) is defined mathematically.

$$CR = \frac{\text{Luminance when displaying a white raster}}{\text{Luminance when displaying a black raster}}$$

- Center Luminance of white is defined as luminance values of 5 point average across the LCD surface. Luminance shall be measured with all pixels in the view field set first to white. This measurement shall be taken at the locations shown in Figure 8 for a total of the measurements per display.
- The White luminance uniformity on LCD surface is then expressed as : $\Delta Y = \text{Minimum Luminance of 5(or 13) points} / \text{Maximum Luminance of 5(or 13) points.}$ (see Figure 8 and Figure 9).
- The color chromaticity coordinates specified in Table 5 shall be calculated from the spectral data measured with all pixels first in red, green, blue and white. Measurements shall be made at the center of the panel.
- The electro-optical response time measurements shall be made as Figure 10 by switching the "data" input signal ON and OFF. The times needed for the luminance to change from 10% to 90% is T_r , and 90% to 10% is T_f .
- Cross-Talk of one area of the LCD surface by another shall be measured by comparing the luminance (YA) of a 25mm diameter area, with all display pixels set to a gray level, to the luminance (YB) of that same area when any adjacent area is driven dark. (See Figure 11).

4.3 Optical Measurements

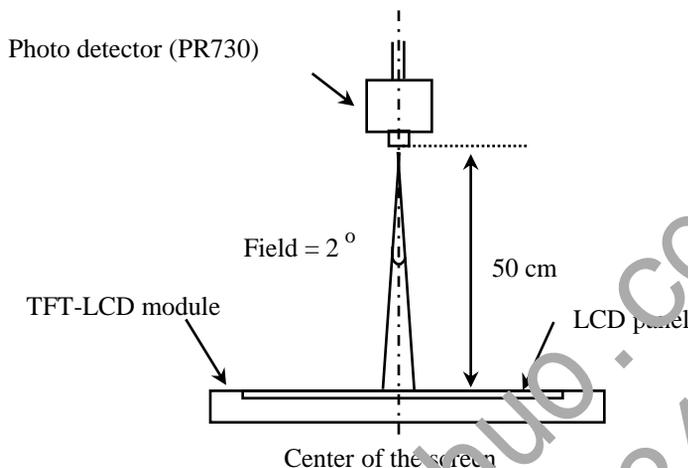

Optical characteristics measurement setup

Figure 7. Measurement Set Up

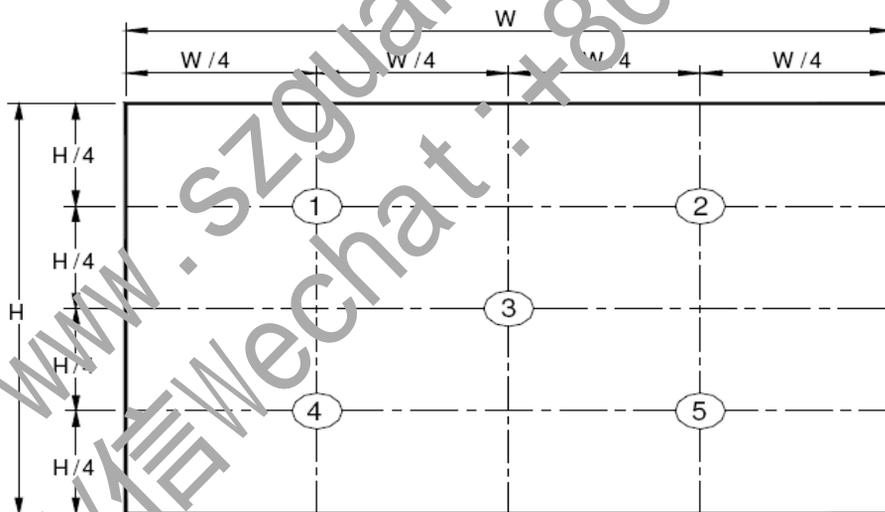


Figure 8. White Luminance and Uniformity Measurement Locations (5 points)

Center Luminance of white is defined as luminance values of center 5 points across the LCD surface. Luminance shall be measured with all pixels in the view field set first to white. This measurement shall be taken at the locations shown in Figure 7 for a total of the measurements per display.

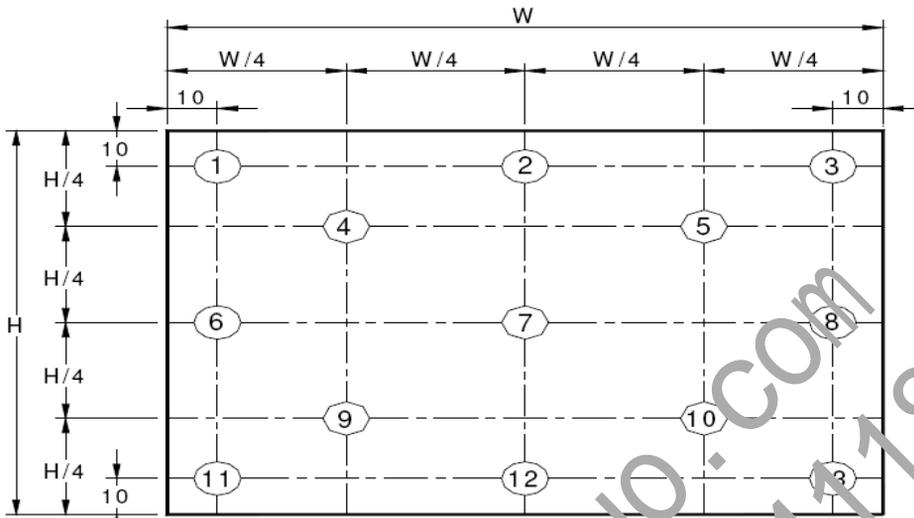


Figure 9. Uniformity Measurement Locations (13 points)

The White luminance uniformity on LCD surface is then expressed as : $\Delta Y5$ = Minimum Luminance of five points / Maximum Luminance of five points (see Figure 8), $\Delta Y13$ = Minimum Luminance of 13 points / Maximum Luminance of 13 points (see Figure 9).


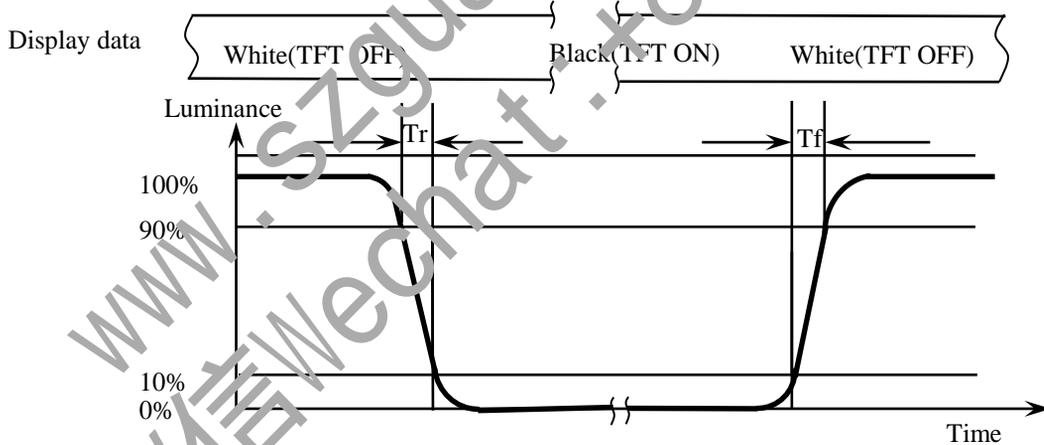


Figure 10. Response Time Testing

The electro-optical response time measurements shall be made as shown in Figure 10 by switching the “data” input signal ON and OFF. Tr: The luminance to change from 90% to 10% ,Tf: The luminance to change from 10% to 90% .

The test system : PR810

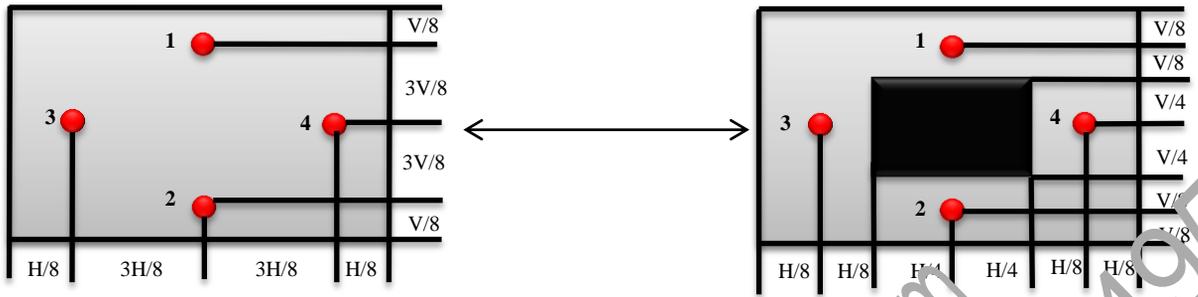

$$\text{Cross Talk (\%)} = \left| \frac{Y_B - Y_A}{Y_A} \right| \times 100$$

Figure 11. Cross Talk Modulation Test Description

Where:

Y_A = Initial luminance of measured area (cd/m^2)

Y_B = Subsequent luminance of measured area (cd/m^2)

The location 1/2/3/4 measured will be exactly the same in both patterns. The test background gray is from L64 to L192. Take the largest data as the result.

Cross Talk of one area of the LCD surface by another shall be measured by comparing the luminance (Y_A) of a 25mm diameter area, with all display pixels set to a gray level, to the luminance (Y_B) of that same area when any adjacent area is driven dark. (Refer to Figure 11)

The test system: PR730

5.0 INTERFACE CONNECTION

5.1 Electrical Interface Connection

The electronics interface connector is STM MSAK24025P30.

The connector interface pin assignments are listed in Table 6.

<Table 6. Pin Assignments for the Interface Connector>

Terminal	Symbol	Functions
Pin No.	Symbol	Description
1	NC	No Connection
2	H_GND	Ground
3	LANE1_N	eDP RX Channel 1 Negative
4	LANE1_P	eDP RX Channel 1 Positive
5	H_GND	Ground
6	LANE0_N	eDP RX Channel 0 Negative
7	LANE0_P	eDP RX Channel 0 Positive
8	H_GND	Ground
9	AUX_CH_P	eDP AUX CH Positive
10	AUX_CH_N	eDP AUX CH Negative
11	H_GND	Ground
12	LCD_VCC	Power Supply, 3.3V (typ.)
13	LCD_VCC	Power Supply, 3.3V (typ.)
14	BIST	Panel Self Test Enable
15	H_GND	Ground
16	H_GND	Ground
17	HPD	Hot Plug Detect Output
18	BL_GND	LED Ground
19	BL_GND	LED Ground
20	BL_GND	LED Ground
21	BL_GND	LED Ground
22	BL_EN BLE	LED Enable Pin(+3.3V Input)
23	BL_PWM	System PWM Signal Input
24	NC	No Connection
25	NC	No Connection
26	BL_POWER	LED Power Supply 5V-21V
27	BL_POWER	LED Power Supply 5V-21V
28	BL_POWER	LED Power Supply 5V-21V
29	BL_POWER	LED Power Supply 5V-21V
30	NC	No Connection

5.2 eDP Interface

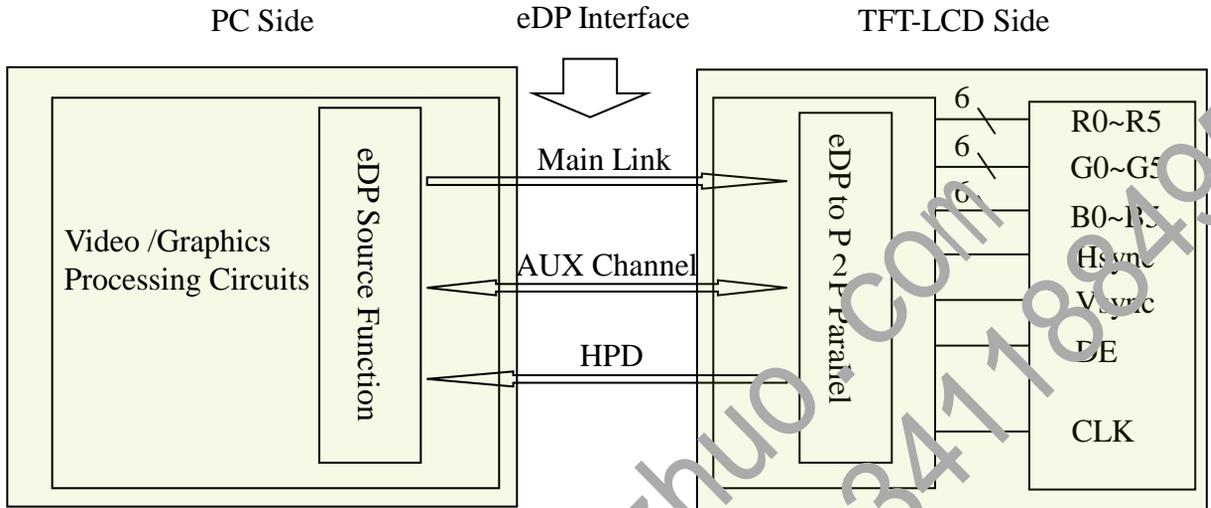


Figure 12. eDP Interface Architecture

Note:

Transmitter : Parade DP501 or equivalent.
 Transmitter is not contained in module.

5.3 Data Input Format

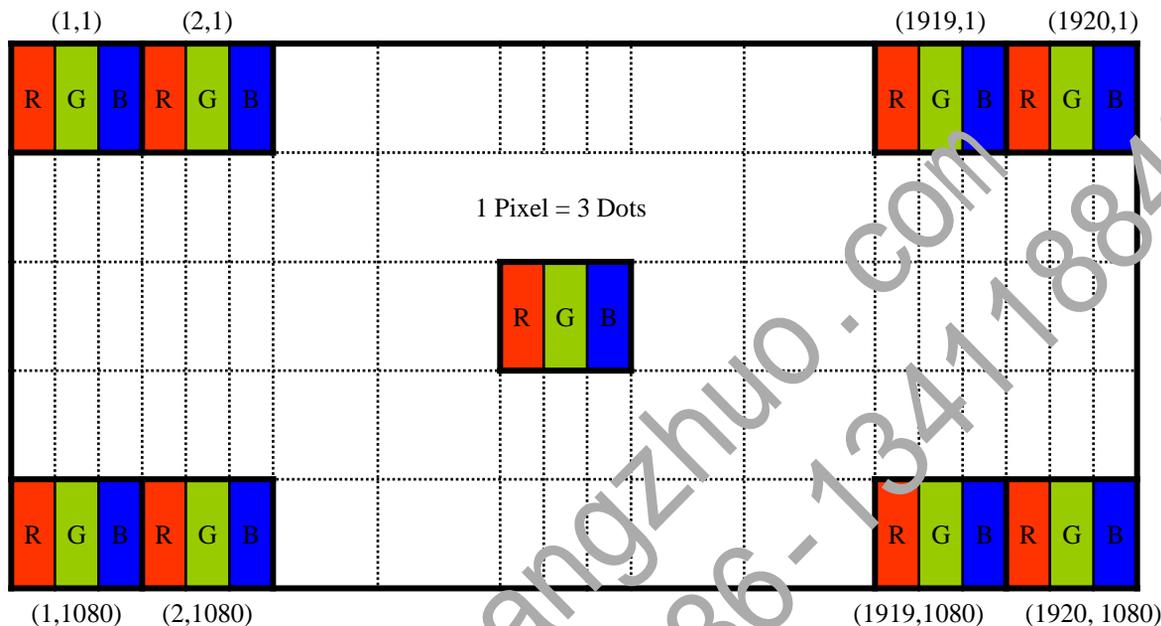


Figure 13 Display Position of Input Data (V-H)

5.5 Back-light & LCM Interface Connection

BLU Interface Connector: STM MSK24022P10 or Compatible .

<Table 7. Pin Assignments for the BLU Connector>

Pin No.	Symbol	Description	Pin No.	Symbol	Description
1	Vout	LED anode connection	6	NC	No Connection
2	Vout	LED anode connection	7	LED	LED cathode connection
3	Vout	LED anode connection	8	LED	LED cathode connection
4	NC	No Connection	9	LED	LED cathode connection
5	GND	GND	10	LED	LED cathode connection

6.0 SIGNAL TIMING SPECIFICATION

6.1 The NV140FHM-N66 Is Operated By The DE Only

< Table 8. Signal Timing Specification >

Item		Symbols	Min	Typ	Max	Unit
Clock	Frequency	1/Tc	146.8	147.8	148.8	MHz
Frame Period		Tv	1115	1120	1125	lines
			-	60	-	Hz
			-	16.67	-	ms
Vertical Display Period		Tvd	-	1080	-	lines
One line Scanning Period		Th	2195	2200	2205	clocks
Horizontal Display Period		Thd	-	1920	-	clocks

Note : The above is as optimized setting.

6.2 eDP Rx Interface Timing Parameter

The specification of the eDP Rx interface timing parameter is shown in Table 9.

<Table 9. eDP Main-Link RX TP4 Package Pin Parameters>

Item	Symbol	Min	Typ	Max	Unit	Remark
Spread spectrum clock (Link clock down-spreading)	SSC	-	-	0.5	%	
Differential peak-to-peak input voltage at package pins	VRX-DIFFp-p	120	-	1200	mV	
Rx input DC common mode voltage	VRX_DC_CM	0	-	2	V	
Differential termination resistance	RRX-DIFF	90	-	110	Ω	
Single-ended termination resistance	RRX-SE	40	-	60	Ω	
Rx short circuit current limit	IRX_SHORT	-	-	50	mA	
Intra-pair skew at Rx package pins (HBR) RX intra-pair skew tolerance at HBR	LRX_SKEW, INTRK_PAIR	-	-	60	ps	
AC Coupling Capacitor	CSOURCE_ML	75	-	200	nF	Source side

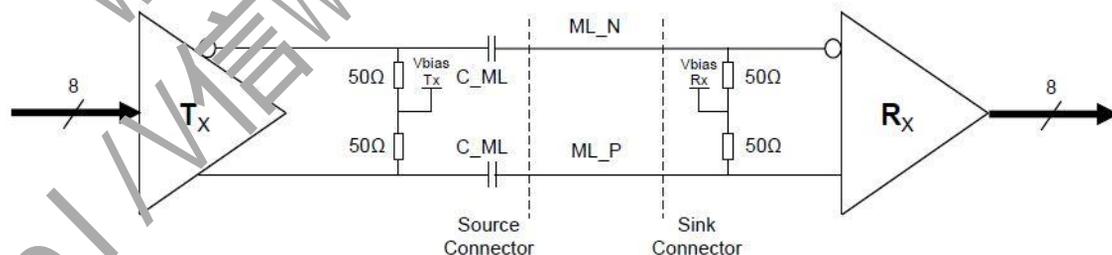


Figure 14. Main link differential pair

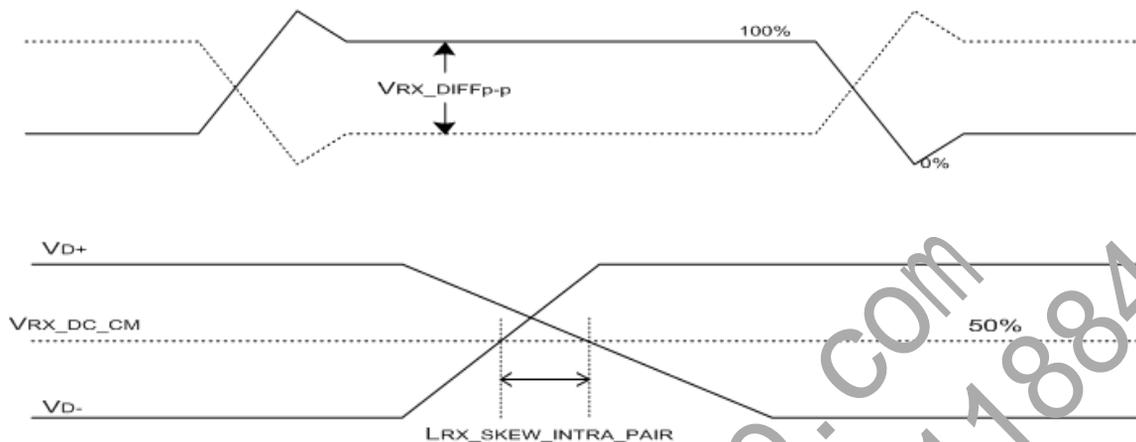


Figure 15. $VRX_DIFFp-p$ & $LRX_SKEW_INTRA_PAIR$

<Table 10. HPD Characteristics>

Item	Symbol	Min	Typ	Max	Unit	Remark
HPD voltage	V _{HPD}	2.25	-	3.6	V	
Hot Plug Detection Threshold	-	2.0	-	-	V	Source side Detecting
Hot Unplug Detection Threshold	-	-	-	0.8V	V	
HPD_IRQ Pulse Width	HPD_IRQ	0.5	-	1	ms	
HPD_TimeOut	-	2.0	-	-	ms	

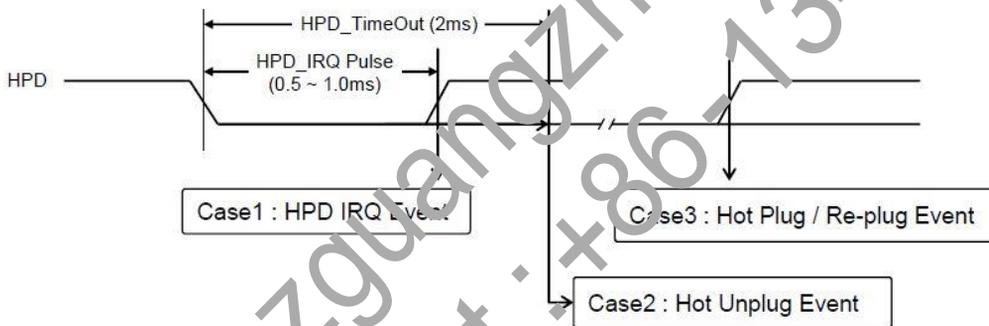


Figure 16. HPD Events

<Table 11. AUX Characteristics>

Item	Symbol	Min	Typ	Max	Unit	Remark
AUX unit interval	UIAUX	0.4	0.5	0.6	Us	
AUX peak-to-peak input differential voltage	VAUX-RX-DIFFp-p	0.29	-	1.38	V	
AUX CH termination DC resistance	RAUX-TERM	80	100	120	Ohm	
AUX DC common mode voltage	VAUX-DC-CM	0	-	2	V	
AUX turn around common mode voltage	VAUX-TURN-CM	-	-	0.5	V	
AUX short circuit current limit	IAUX-SHORT	-	-	50	mA	
AUX AC Coupling Capacitor	CSOURCE-AUX	75	-	200	nf	Source side

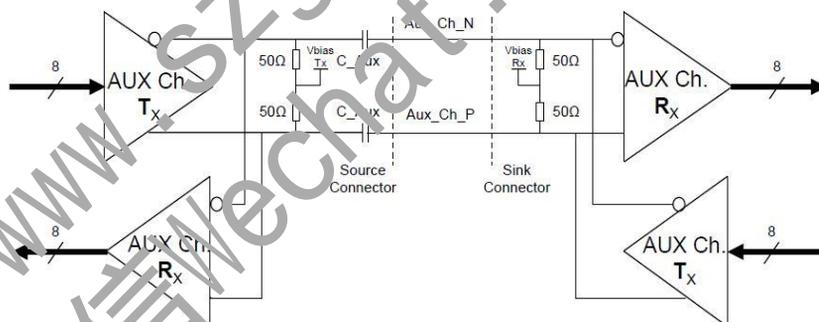


Figure 17. AUX differential pair

7.0 INPUT SIGNALS, BASIC DISPLAY COLORS & GRAY SCALE OF COLORS

<Table 10. Input Signal & Basic Display Colors & Gray Scale of Colors >

	Colors & Gray scale	Data signal															
		R0 R1 R2 R3 R4 R5 R6 R7	G0 G1 G2 G3 G4 G5 G6 G7	B0 B1 B2 B3 B4 B5 B6 B7													
Basic colors	Black	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0													
	Blue	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0	1 1 1 1 1 1 1 1													
	Green	0 0 0 0 0 0 0 0	1 1 1 1 1 1 1 1	0 0 0 0 0 0 0 0													
	Light Blue	0 0 0 0 0 0 0 0	1 1 1 1 1 1 1 1	1 1 1 1 1 1 1 1													
	Red	1 1 1 1 1 1 1 1	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0													
	Purple	1 1 1 1 1 1 1 1	0 0 0 0 0 0 0 0	1 1 1 1 1 1 1 1													
	Yellow	1 1 1 1 1 1 1 1	1 1 1 1 1 1 1 1	0 0 0 0 0 0 0 0													
	White	1 1 1 1 1 1 1 1	1 1 1 1 1 1 1 1	1 1 1 1 1 1 1 1													
Gray scale of Red	Black	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0													
	△	1 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0													
	Darker	0 1 0 0 0 0 0 0	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0													
	△																
	▽																
	Brighter	1 0 1 1 1 1 1 1	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0													
	▽	0 1 1 1 1 1 1 1	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0													
	Red	1 1 1 1 1 1 1 1	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0													
Gray scale of Green	Black	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0													
	△	0 0 0 0 0 0 0 0	1 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0													
	Darker	0 0 0 0 0 0 0 0	0 1 0 0 0 0 0 0	0 0 0 0 0 0 0 0													
	△																
	▽																
	Brighter	0 0 0 0 0 0 0 0	1 0 1 1 1 1 1 1	0 0 0 0 0 0 0 0													
	▽	0 0 0 0 0 0 0 0	0 1 1 1 1 1 1 1	0 0 0 0 0 0 0 0													
	Green	0 0 0 0 0 0 0 0	1 1 1 1 1 1 1 1	0 0 0 0 0 0 0 0													
Gray scale of Blue	Black	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0													
	△	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0	1 0 0 0 0 0 0 0													
	Darker	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0	0 1 0 0 0 0 0 0													
	△																
	▽																
	Brighter	0 1 0 0 0 0 0 0	0 0 0 0 0 0 0 0	1 0 1 1 1 1 1 1													
	▽	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0	0 1 1 1 1 1 1 1													
	Blue	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0	1 1 1 1 1 1 1 1													
Gray scale of White& Black	Black	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0													
	△	1 0 0 0 0 0 0 0	1 0 0 0 0 0 0 0	1 0 0 0 0 0 0 0													
	Darker	0 1 0 0 0 0 0 0	0 1 0 0 0 0 0 0	0 1 0 0 0 0 0 0													
	△																
	▽																
	Brighter	1 0 1 1 1 1 1 1	1 0 1 1 1 1 1 1	1 0 1 1 1 1 1 1													
	▽	0 1 1 1 1 1 1 1	0 1 1 1 1 1 1 1	0 1 1 1 1 1 1 1													
	White	1 1 1 1 1 1 1 1	1 1 1 1 1 1 1 1	1 1 1 1 1 1 1 1													

8.0 POWER SEQUENCE

To prevent a latch-up or DC operation of the LCD module, the power on/off sequence shall be as shown in below.

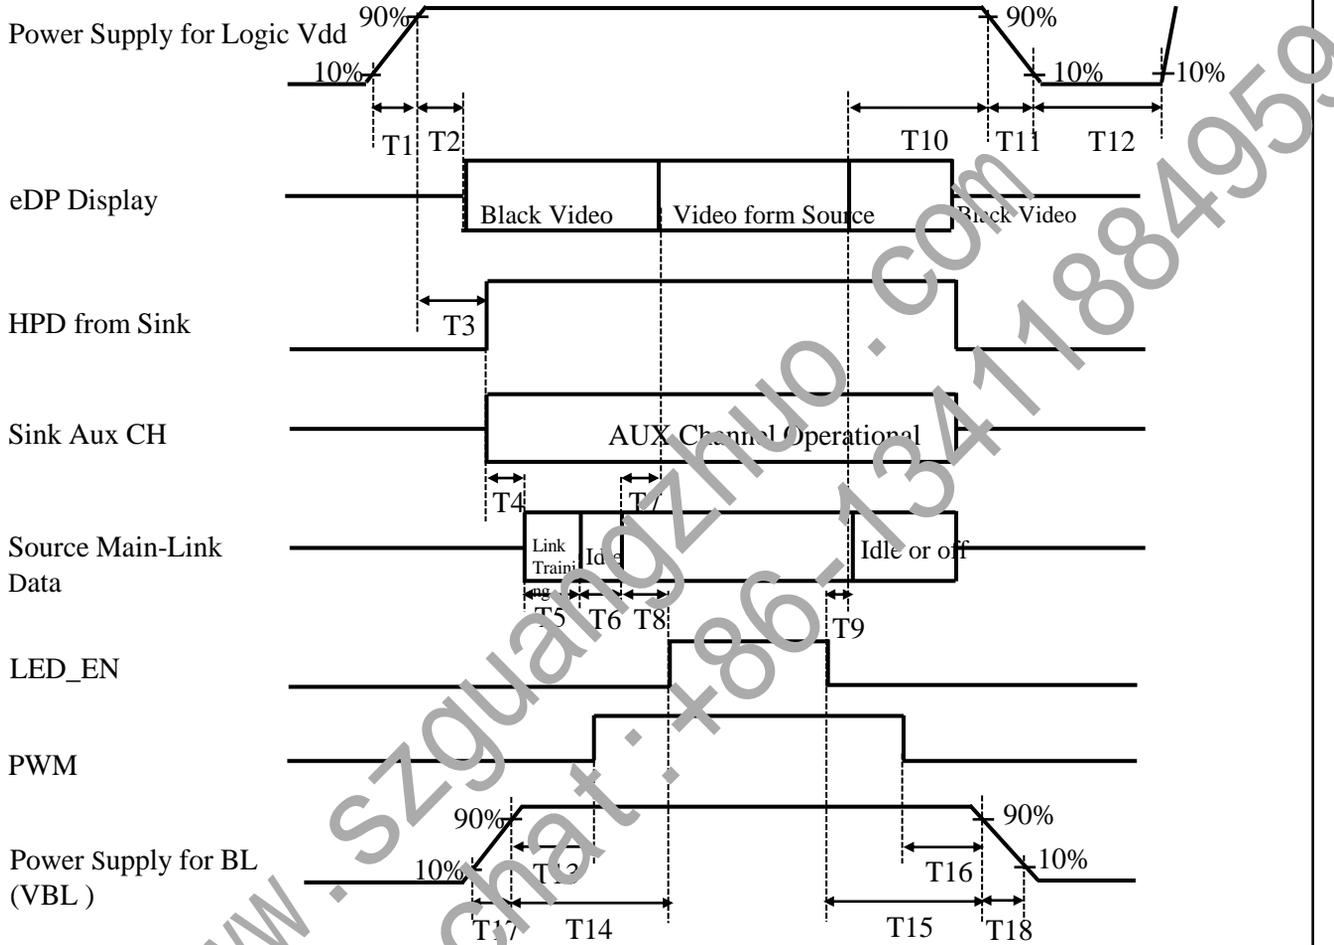


Figure 18. Power Sequence

- 0.5ms ≤ T1 ≤ 10 ms
- 0ms < T2 ≤ 200 ms
- 0ms < T3 ≤ 200 ms
- T3+T4+T5+T6+T8 > 200ms
- 0ms < T7 ≤ 50ms
- 50ms < T8
- 0ms < T9
- 0ms < T10 < 500 ms
- 0.5ms ≤ T11 ≤ 10 ms
- 500ms ≤ T12
- 0ms < T13
- 0ms < T14
- 0ms < T15
- 0ms < T16
- 0.5ms ≤ T17
- 0.5ms ≤ T18

Note:

- When the power supply VDD is 0V, keep the level of input signals on the low or keep high impedance.
- Do not keep the interface signal high impedance when power is on. Back Light must be turn on after power for logic and interface signal are valid.

Customer Spec

P1

2020.02.24

Power Supply for Logic Vdd

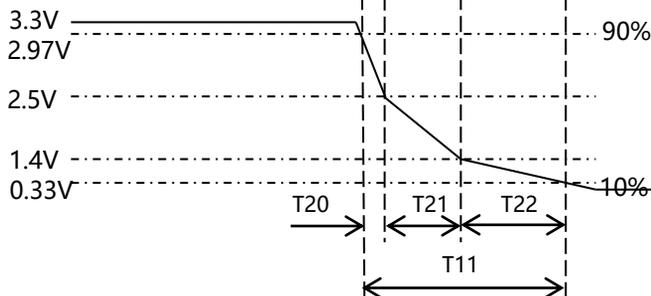


Figure 16. T11 timing requirement

- $0.5\text{ms} \leq T11 \leq 10\text{ms}$
 - $0.225\text{ms} \leq T21$
 - $T11 = T20 + T21 + T22$
- (Figure 19)

9.0 Connector Description

Physical interface is described as for the connector on I.C.M.

These connectors are capable of accommodating the following signals and will be following components.

9.1 TFT LCD Module

< Table 13. Signal Connector >

Connector Name /Description	For Signal Connector
Manufacturer	STM
Type/ Part Number	MSAK24025P30
Mating Housing Part Number	I-PEX 20454-030T

10.0 MECHANICAL CHARACTERISTICS

10.1 Dimensional Requirements

Figure 21 shows mechanical outlines for the model NV140FHM-N66.
Other parameters are shown in Table 12.

<Table 12. Dimensional Parameters>

Parameter	Specification	Unit
Active Area	309.312(H) × 173.988 (V)	mm
Number of pixels	1920 (H) X 1080 (V) (1 pixel = R + G + B dot)	pixels
Pixel pitch	161.1 (H) X 161.1 (V)	um
Pixel arrangement	RGB Vertical stripe	
Display colors	16.2M(6bit+FRC)	
Display mode	Normally Black	
Dimensional outline	314.31±0.3 (H)×183.59±0.3 (V) ×2.4(max) W/O PCB 314.31±0.3 (H)×191.09±0.5 (V) ×2.6(max) W/ PCB	mm
Weight	220 (max)	g

10.2 Mounting

See Figure 21.

10.3 Anti-Glare and Polarizer Hardness

The surface of the LCD has an Anti-Glare coating to minimize reflection and to reduce scratching. The Polarizer hardness is 3H.

10.4 Light Leakage

There shall not be visible light from the back-lighting system around the edges of the screen as seen from a distance 50cm from the screen with an overhead light level of 250lux.

11.0 RELIABILITY TEST

The reliability test items and its conditions are shown in below.

<Table 13. Reliability Test>

No	Test Items	Conditions
1	High temperature storage test	Ta = 60°C , 60%RH, 240 hrs
2	Low temperature storage test	Ta = -20°C , 240 hrs
3	High temperature & high humidity operation test	Ta = 50°C , 80%RH, 240 hrs
4	High temperature operation test	Ta = 50°C , 60%RH, 240 hrs
5	Low temperature operation test	Ta = 0°C , 240 hrs
6	Thermal shock	Ta = -20 °C → 60 °C (0.5 h), 60%±3%RH, 100 cycle
7	Vibration test (non-operating)	Ta = 25°C , 60%RH ± 5G, 10~500Hz, Sine X, Y, Z / Sweep rate : 1 hour
8	Shock test (non-operating)	Ta = 25°C , 60%RH, 220G, Half Sine Wave 2ms±0.5ms ±X, ±Y, ±Z Once for each direction
9	Electro-static discharge test (non-operating)	Air : 150 pF, 330Ω, ±15 KV Contact : 150 pF, 330Ω, ±8 KV Ta = 25°C , 60%RH,

12.0 HANDLING & CAUTIONS

(1) Cautions when taking out the module

- Pick the pouch only, when taking out module from a shipping package.

(2) Cautions for handling the module

- As the electrostatic discharges may break the LCD module, handle the LCD module with care. Peel a protector sheet off from the LCD panel surface as slowly as possible.
- As the LCD panel and back light element are made from fragile glass material, impulse and pressure to the LCD module should be avoided.
- As the surface of the polarizer is very soft and easily scratched, use a soft dry cloth without chemicals for cleaning.
- Do not pull the interface connector in or out while the LCD module is operating.
- Put the module display side down on a flat horizontal plane.
- Handle connectors and cables with care.

(3) Cautions for the operation

- When the module is operating, do not lose CLK, ENAB signals. If any one of these signals is lost, the LCD panel would be damaged.
- Obey the supply voltage sequence. If wrong sequence is applied, the module would be damaged.

(4) Cautions for the atmosphere

- Dew drop atmosphere should be avoided.
- Do not store and/or operate the LCD module in a high temperature and/or humidity atmosphere. Storage in an electro-conductive polymer packing pouch and under relatively low temperature atmosphere is recommended.

(5) Cautions for the module characteristics

- Do not apply fixed pattern data signal to the LCD module at product aging.
- Applying fixed pattern for a long time may cause image sticking.

(6) Other cautions

- Do not disassemble and/or re-assemble LCD module.
- Do not re-adjust variable resistor or switch etc.
- When returning the module for repair or etc. Please pack the module not to be broken. We recommend to use the original shipping packages.

13.0 LABEL

(1) Product Label



Figure 17. Product Label

Module ID Naming Rule

<Table 14. Module ID Naming Rule>

Digit Code	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
Code	9	9	A	F	1	7	8	8	D	3	8	0	0	0	0	6	8
Description	Product Name		Product Grade	B8	Year		Month	Model Extension Code (Last 4 Digits of FG CODE)				Serial No. 0001-ZZZZZ					

(2) High voltage caution label

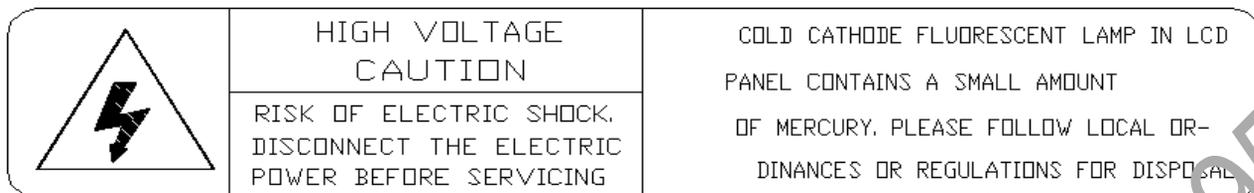


Figure 18. High Voltage Caution Label

(3) Box Label

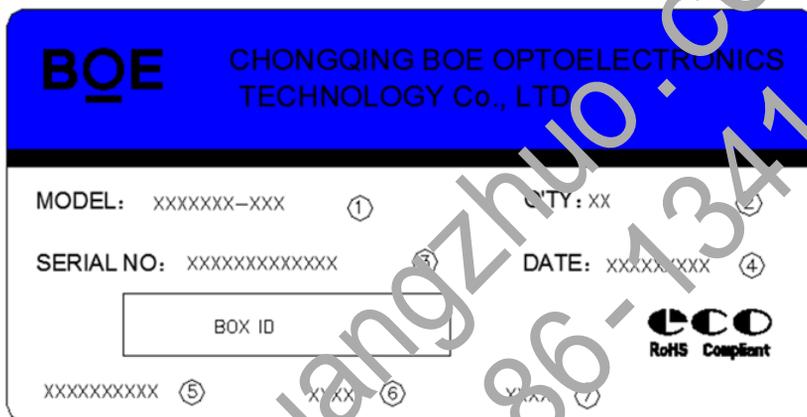


Figure 19. Box Label

Serial number marked part needs to print, show as follows:

1. FG-CODE(Before 12 bit)
2. Product quantity
3. Box ID
4. Date
5. The client section material number(The client)
6. FG-Code After four
7. The supplier code


Total Size: 100×50mm

<Table 15. Box Label Naming Rule >

Digit Code	1	2	3	4	5	6	7	8	9	10	11	12	13
Code	B	9	A	F	1	7	8	N	0	0	3	2	7
Description	Product Name		Product Grade	B8	Year		Month	Revision	BOX Serial Number				

14.0 PACKING INFORMATION

14.1 Packing Order

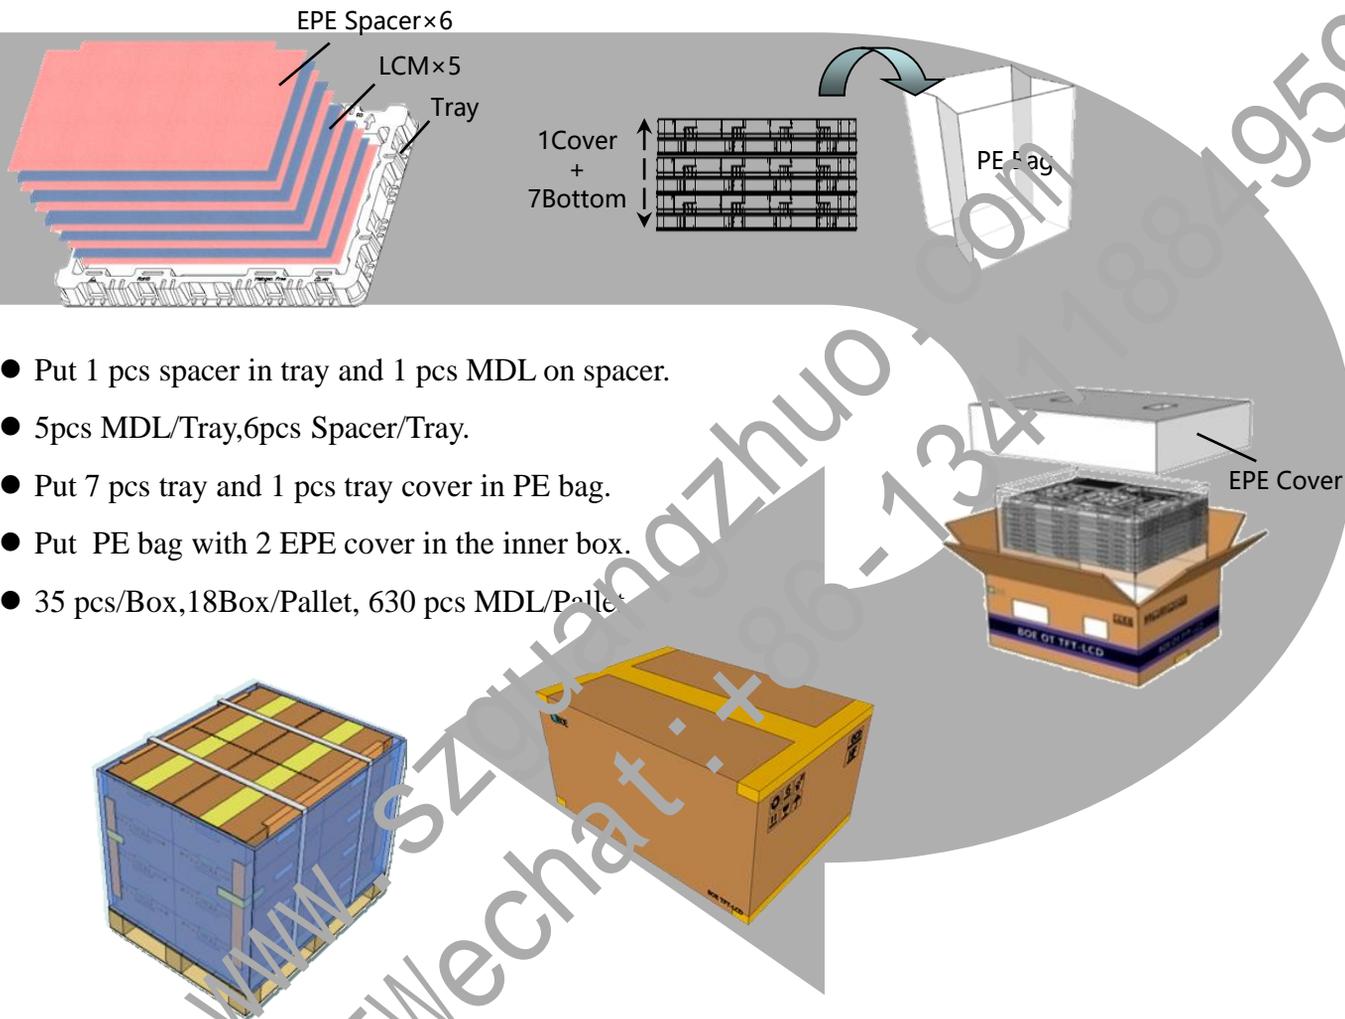

- Put 1 pcs spacer in tray and 1 pcs MDL on spacer.
- 5pcs MDL/Tray,6pcs Spacer/Tray.
- Put 7 pcs tray and 1 pcs tray cover in PE bag.
- Put PE bag with 2 EPE cover in the inner box.
- 35 pcs/Box,18Box/Pallet, 630 pcs MDL/Pallet

Figure 20. Packing Order

14.2 Note

- Box dimension: 480mm*350mm*285mm
- Package quantity in one box: 35pcs
- Total weight: TBD

15.0 MECHANICAL OUTLINE DIMENSION

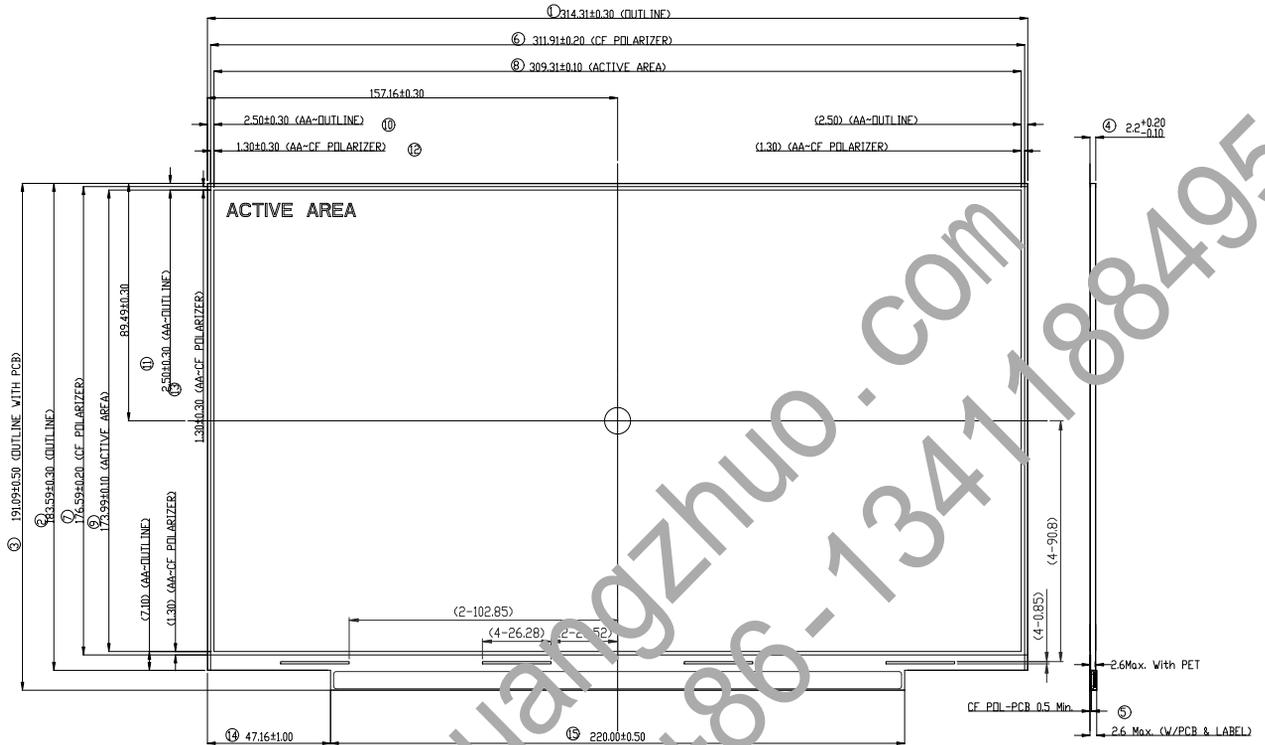


Figure 21. TTT-LCD Module Outline Dimension (Front View)

- NOTES:
1. WARPAGE AND DEFORMATION SPEC.: 0.5mm MAX.
 2. THE eDP CONNECTOR IS MEASURED AT PIN 1 AND MATING LINE
 3. UNSPECIFIED TOLERANCE REFER TO 0.3 mm
 4. THE MEASUREMENT METHOD FOR THE DIMENSION OF MODULE, PLEASE REFRE TO APPENDIX A.
 5. TOP POLARIZER IS THE HIGHEST PORTION.
 6. "()" MEANS REFERENCE DIMENSIONS.
 7. CRITICAL DIMENSION: 1-17

Top POL is the highest part.



Figure 22. Highest Point Position

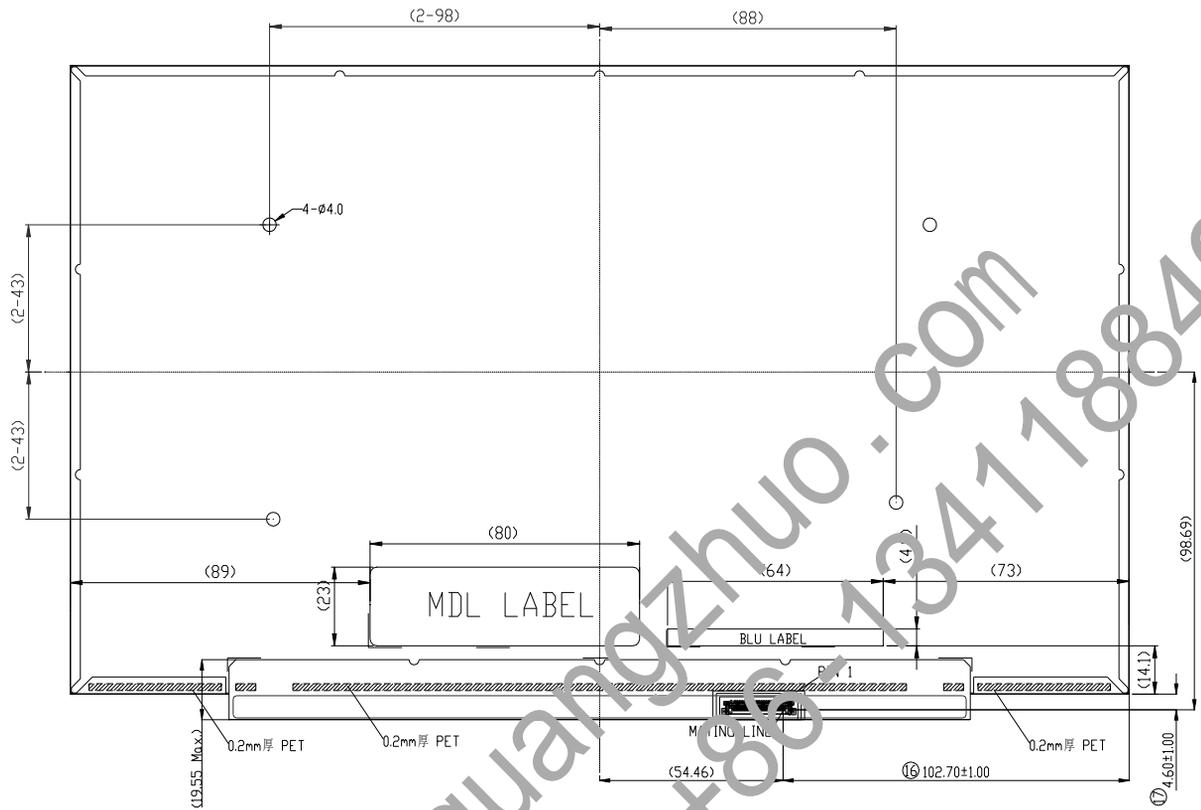


Figure 23. TF-LCD Module Outline Dimensions (Rear view)

- NOTES:
1. WARPAGE AND DEFORMATION SPEC.: 0.5 mm MAX.
 2. THE eDP CONNECTOR IS MEASURED AT PIN 1 AND MATING LINE
 3. UNSPECIFIED TOLERANCE REFER TO 0.3 mm
 4. THE MEASUREMENT METHOD FOR THE DIMENSION OF MODULE, PLEASE REFRE TO APPENDIX A.
 5. TOP POLARIZER IS THE HIGHEST PORTION.
 6. "()" MEANS REFERENCE DIMENSIONS.
 7. CRITICAL DIMENSION: 1-17

16.0 EDID Table

Address (HEX)	Function	Hex	Dec	Input values	Notes
00	Header	00	0	0	EDID Header
01		FF	255	255	
02		FF	255	255	
03		FF	255	255	
04		FF	255	255	
05		FF	255	255	
06		FF	255	255	
07		00	0	0	
08	ID Manufacturer Name	09	9	BOE	ID = BOE
09		E5	229		
0A	ID Product Code	EE	238	2286	ID = 2286
0B		08	8		
0C	32-bit serial No.	00	0	0	
0D		00	0	0	
0E		00	0	0	
0F		00	0	0	
10	Week of manufacture	2C	44	44	
11	Year of Manufacture	1D	29	2019	Manufactured in 2019
12	EDID Structure Ver.	01	1	1	EDID Ver 1.0
13	EDID revision #	04	4	4	EDID Rev. 0.4
14	Video input definition	A5	165	-	Video Signal Interface
15	Max H image size	1F	31	31	31cm (Approx)
16	Max V image size	11	17	17	17cm (Approx)
17	Display Gamma	78	120	2.2	Gamma curve = 2.2
18	Feature support	03	3	-	Feature Support
19	Red/Green low bits	22	34	-	Red / Green Low Bits
1A	Blue/White low bits	26	38	-	Blue / White Low Bits
1B	Red x high bits	A4	164	0.641	Red (x) = 10100100 (0.641)
1C	Red y high bits	53	83	0.326	Red (y) = 01010011 (0.326)
1D	Green x high bits	4C	76	0.297	Green (x) = 01001100 (0.297)
1E	Green y high bits	9B	155	0.607	Green (y) = 10011011 (0.607)
1F	Blue x high bits	27	39	0.152	Blue (x) = 00100111 (0.152)
20	Blue y high bits	0F	15	0.061	Blue (y) = 00001111 (0.061)
21	White x high bits	4E	78	0.306	White (x) = 01001110 (0.306)
22	White y high bits	51	81	0.318	White (y) = 01010001 (0.318)
23	Established timing 1	00	0	-	--
24	Established timing 2	00	0	-	
25	Established timing 3	00	0	-	

Customer Spec

P1

2020.02.24

26	Standard timing #1	01	1		Not Used
27		01	1		
28	Standard timing #2	01	1		Not Used
29		01	1		
2A	Standard timing #3	01	1		Not Used
2B		01	1		
2C	Standard timing #4	01	1		Not Used
2D		01	1		
2E	Standard timing #5	01	1		Not Used
2F		01	1		
30	Standard timing #6	01	1		Not Used
31		01	1		
32	Standard timing #7	01	1		Not Used
33		01	1		
34	Standard timing #8	01	1		Not Used
35		01	1		
36	Detailed timing/monitor descriptor #1	C0	192	147.84	147.84MHz Main clock
37		39	57		
38		80	128	1920	Hor Active = 1920
39		18	24	280	Hor Blanking = 280
3A		71	113	-	4 bits of Hor. Active + 4 bits of Hor. Blanking
3B		38	56	1080	Ver Active = 1080
3C		28	40	40	Ver Blanking = 40
3D		40	54	-	4 bits of Ver. Active + 4 bits of Ver. Blanking
3E		30	48	48	Hor Sync Offset = 48
3F		20	32	32	H Sync Pulse Width = 32
40		30	54	3	V sync Offset = 3 line
41		00	0	6	V Sync Pulse width : 6 line
42		35	53	309	Horizontal Image Size = 309 mm (Low 8 bits)
43		AE	174	174	Vertical Image Size = 174 mm (Low 8 bits)
44		10	16	-	4 bits of Hor Image Size + 4 bits of Ver Image Size
45		00	0	0	Hor Border (pixels)
46		00	0	0	Vertical Border (Lines)
47	1A	26	-	Detailed timing Definition	

48	Detailed timing/monitor descriptor #2	34	52	118.27	118.27199999999999MHz Main clock
49		2E	46		
4A		80	128	1920	Hor Active = 1920
4B		18	24	280	Hor Blanking = 280
4C		71	113	-	4 bits of Hor. Active + 4 bits of Hor. Blanking
4D		38	56	1080	Ver Active = 1080
4E		28	40	40	Ver Blanking = 40
4F		40	64	-	4 bits of Ver. Active + 4 bits of Ver. Blanking
50		30	48	48	Hor Sync Offset = 48
51		20	32	32	H Sync Pulse Width = 32
52		36	54	3	V sync Offset = 3 line
53		00	0	6	V Sync Pulse width : 6 line
54		35	53	309	Horizontal Image Size = mm (Low 8 bits)
55		AE	174	174	Vertical Image Size = mm (Low 8 bits)
56		10	16	-	4 bits of Hor Image Size + 4 bits of Ver Image Size
57		00	0	0	Hor Border (pixels)
58		00	0	0	Vertical Border (Lines)
59		1A	26	-	Detailed timing Definition
5A		00	0	-	Indicates descriptor #3 is a display Descriptor
5B		00	0	-	
5C	00	0	-	Reserved	
5D	FF	254	-	Tag : ASCII String	
5E	00	0	-	Reserved	
5F	42	66	B	Manufacture name : BOECQ	
60	4F	79	O		
61	45	69	E		
62	20	32			
63	43	67	C		
64	51	81	Q		
65	0A	10			
66	20	32			
67	20	32			
68	20	32			
69	20	32			
6A	20	32			
6B	20	32			
6C	20	32			
6D	20	32			
6E	20	32			
6F	20	32			
70	20	32			
71	20	32			
72	20	32			
73	20	32			
74	20	32			
75	20	32			
76	20	32			
77	20	32			
78	20	32			
79	20	32			
7A	20	32			
7B	20	32			
7C	20	32			
7D	20	32			
7E	20	32			
7F	20	32			
80	20	32			
81	20	32			
82	20	32			
83	20	32			
84	20	32			
85	20	32			
86	20	32			
87	20	32			
88	20	32			
89	20	32			
8A	20	32			
8B	20	32			
8C	20	32			
8D	20	32			
8E	20	32			
8F	20	32			
90	20	32			
91	20	32			
92	20	32			
93	20	32			
94	20	32			
95	20	32			
96	20	32			
97	20	32			
98	20	32			
99	20	32			
9A	20	32			
9B	20	32			
9C	20	32			
9D	20	32			
9E	20	32			
9F	20	32			
A0	20	32			
A1	20	32			
A2	20	32			
A3	20	32			
A4	20	32			
A5	20	32			
A6	20	32			
A7	20	32			
A8	20	32			
A9	20	32			
AA	20	32			
AB	20	32			
AC	20	32			
AD	20	32			
AE	20	32			
AF	20	32			
B0	20	32			
B1	20	32			
B2	20	32			
B3	20	32			
B4	20	32			
B5	20	32			
B6	20	32			
B7	20	32			
B8	20	32			
B9	20	32			
BA	20	32			
BB	20	32			
BC	20	32			
BD	20	32			
BE	20	32			
BF	20	32			
C0	20	32			
C1	20	32			
C2	20	32			
C3	20	32			
C4	20	32			
C5	20	32			
C6	20	32			
C7	20	32			
C8	20	32			
C9	20	32			
CA	20	32			
CB	20	32			
CC	20	32			
CD	20	32			
CE	20	32			
CF	20	32			
D0	20	32			
D1	20	32			
D2	20	32			
D3	20	32			
D4	20	32			
D5	20	32			
D6	20	32			
D7	20	32			
D8	20	32			
D9	20	32			
DA	20	32			
DB	20	32			
DC	20	32			
DD	20	32			
DE	20	32			
DF	20	32			
E0	20	32			
E1	20	32			
E2	20	32			
E3	20	32			
E4	20	32			
E5	20	32			
E6	20	32			
E7	20	32			
E8	20	32			
E9	20	32			
EA	20	32			
EB	20	32			
EC	20	32			
ED	20	32			
EE	20	32			
EF	20	32			
F0	20	32			
F1	20	32			
F2	20	32			
F3	20	32			
F4	20	32			
F5	20	32			
F6	20	32			
F7	20	32			
F8	20	32			
F9	20	32			
FA	20	32			
FB	20	32			
FC	20	32			
FD	20	32			
FE	20	32			
FF	20	32			

6C	Detailed timing/monitor descriptor #4	00	0		Indicates descriptor #4 is a display Descriptor	
6D		00	0			
6E		00	0		Reserved	
6F		FE	254		Tag : ASCII String	
70		00	0		Reserved	
71		4E	78	N	Model name: NV140FHM-N66	
72		56	86	V		
73		31	49	1		
74		34	52	4		
75		30	48	0		
76		46	70	F		
77		48	72	H		
78		4D	77	M		
79		2D	45	-		
7A		4E	78	N		
7B		36	54	6		
7C		36	54	6		
7D	3A	10				
7E	Extension flag	00	0	1		Extension flag
7F	Checksum	51	81	-		Checksum

Appendix A

The Measurement Methods for the Dimensions of Module

Caliper:

- a. Length of Outline
- b. Width of Outline (Without PCB)
- c. Thickness of Outline (Without/With PCB)

Coordinate Measuring Machine:

- a. Width of Outline (With PCB)
- b. CF Polarizer Size
- c. Active Area (Or AA_BM) Size
- d. Active Area to Outline (Without Tape Wrinkle or Bulged)
- e. Active Area to CF Polarizer
- f. The Distance of Bracket Holes
- g. P-Cover to Outline (Without Tape Wrinkle or Bulged)
- h. Length of P-Cover
- i. Connector Pin 1 to Outline (Without Tape Wrinkle or Bulged)

Height Gauge: The Different Height of Root and Top on the Bracket
(Need to Calculate From Bracket Angle Spec.)




Feeler Gauge: The Warpage Spec. of Module

Notes:

Except the Critical Dimensions as Above, Other Dimensions are Measured by Coordinate Measuring Machine If Necessary.

Appendix B

LCM to A-Cover / sponges z-gap

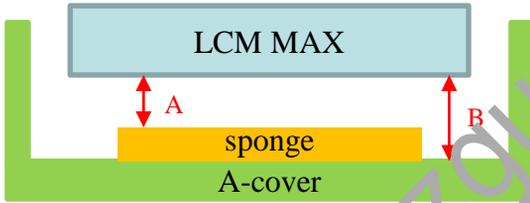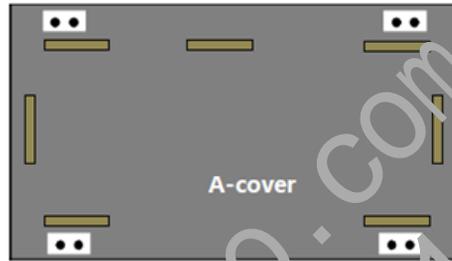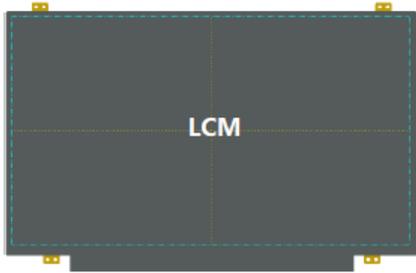


	Plastic Cover (LCM Thickness: Max)	Metal Cover (LCM Thickness: Max)
A	>0mm	>0mm
B	Min: 1.0mm	Min: 0.8mm
Without the open area of back cover		

Purpose

The reflector area is very sensitive, we suggest that design enough z-gap to decrease the risk of water ripple, white spot and other abnormal display

Appendix B

LCM to A-Cover / sponges z-gap

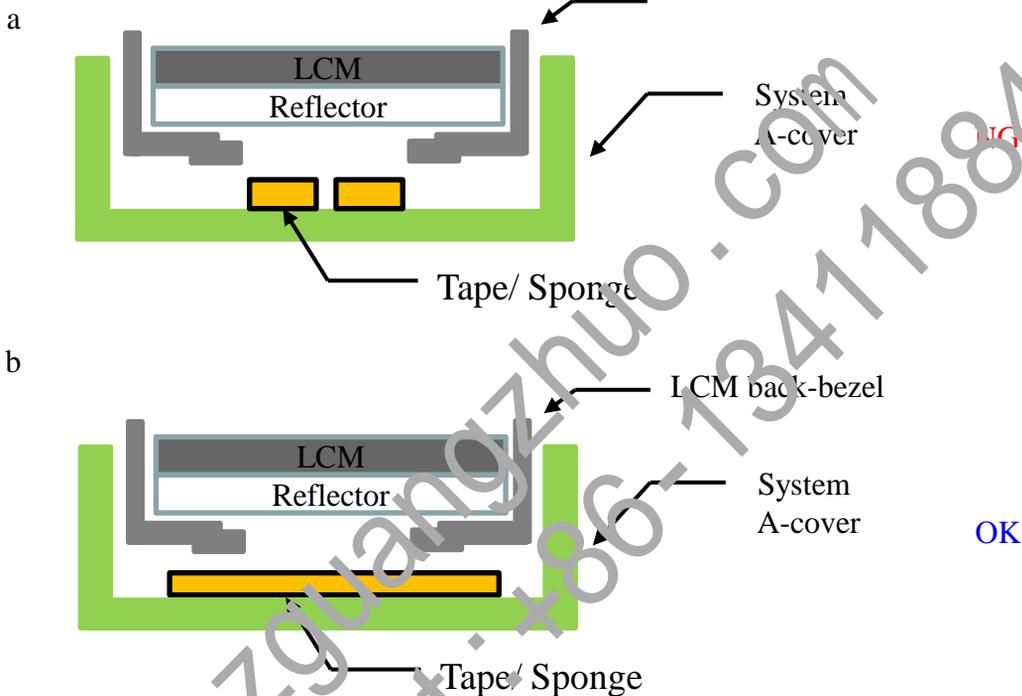


Purpose

If attach sponges or rubbers which correspond to white reflector area, it may cause white spot, pooling or other relate issues. We suggest that attach wide range sponges / rubbers which can cover the LCM back-bezel opening

Appendix B

LCM to side wall / protrusions

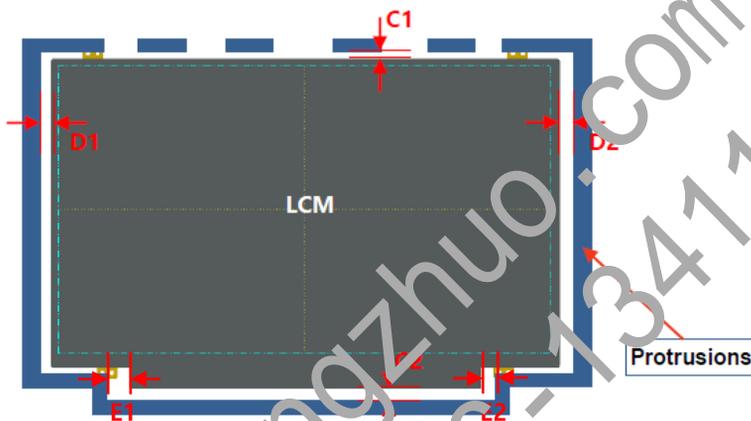

	Normal border	Narrow border
D1/D2	Min: 0.45mm	Min: 0.35mm
C1	Min: 0.50mm	
C2	Min: 0.50mm	
E1/E2	Min: 0.55mm	

Purpose

We suggest that design enough gap around LCM to prevent shock test failure, or interference, cell crack, abnormal display...etc. in the reliability test

Appendix B

LCM to B-cover z-gap




B-cover Tape	Gap
Without	0.15 ~ 0.25mm
With	0.15 ~ 0.20mm

Purpose

Too less z-gap between system B-cover and LCM top pol has high risk to cause cell crack, pooling, light leakage and other issues

Appendix B

B-cover tape to top pol edge

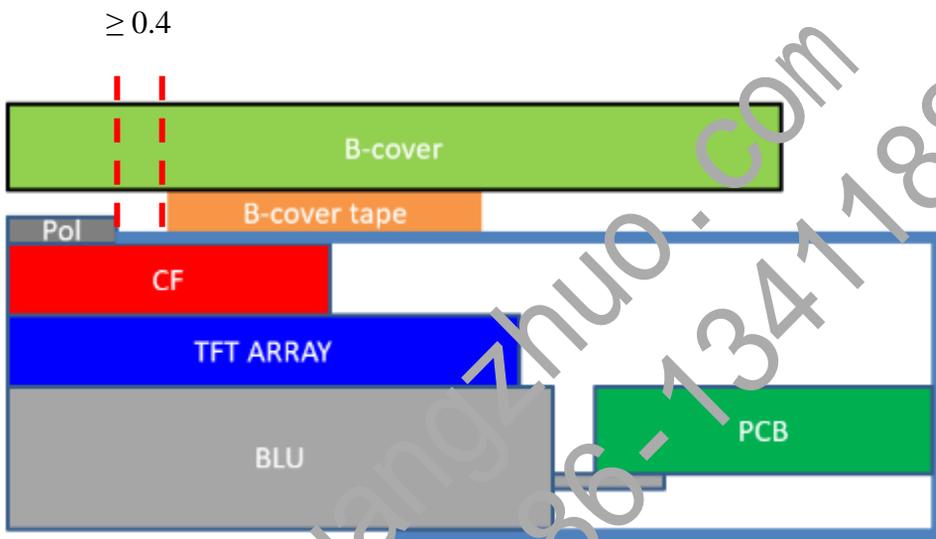



If attach b-cover and LCM with tapes,
Please let tapes to be located out of top pol edges 0.4mm away on 4 sides

Purpose

To avoid the B-cover tape override top pol and cause pooling or light leakage issue

Appendix B

Antenna Cable & Webcam wire

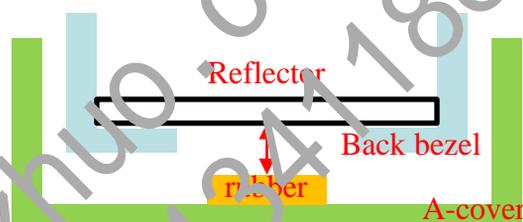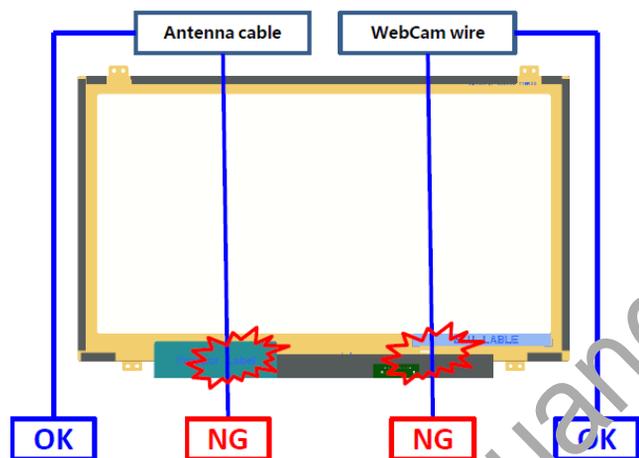


If sponge within the reflector area is necessary, we suggest that the gap between reflector and sponge is more than 0.5mm

Purpose

1. We suggest that do not set Antenna or WebCam cable / wire go behind LCM to avoid backpack test, hinge test, twist test or pogo test with abnormal display
2. If the cable / wire is necessary to go behind LCM, please make a groove with rounds or chamfers to protect the cable / wire, or attach with higher sponge / rubbers adjacent to the cable / wire route
3. Suggest that attach the cable / wire with tapes to A-cover
4. Do not attach anything with LCM reflector area. If attach cable / wire with LCM reflector area, it may cause pooling, white spot, light leakage and other related issues

Appendix B

LCM paste area

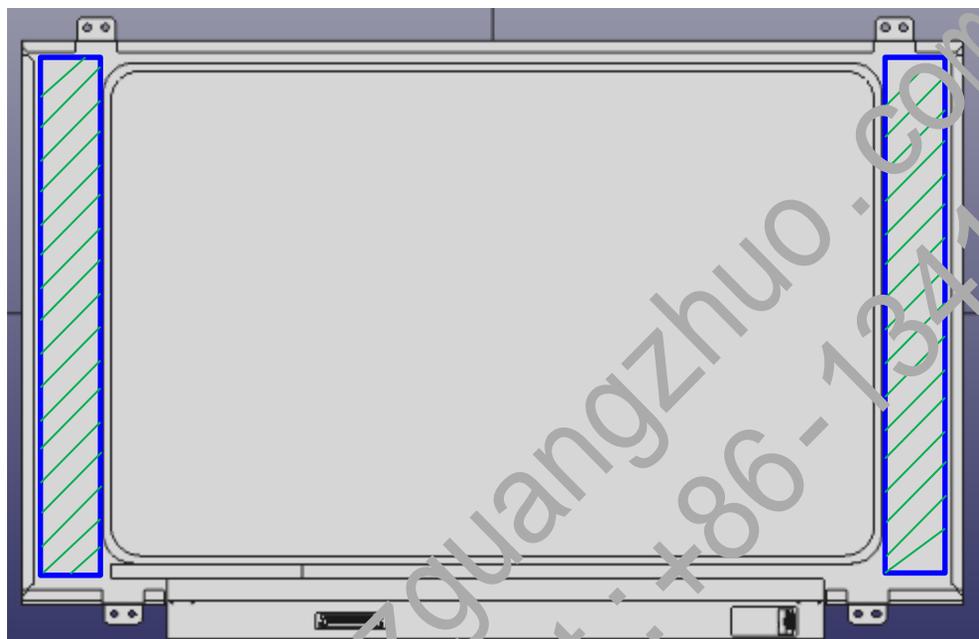



Attachment area

Purpose

If use the stretch remove tapes to fix LCM with A-cover, please set the stretch remove tapes correspond to the LCM back-bezel and do not let the tapes override the back-bezel's level step of opening

Appendix B

LCM pressable area

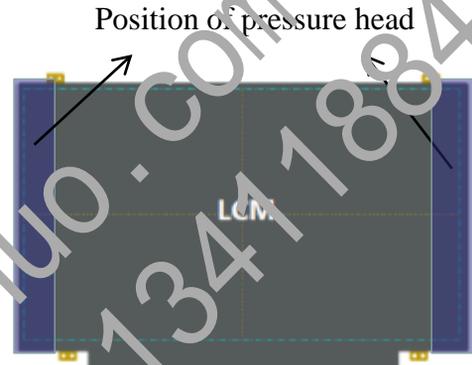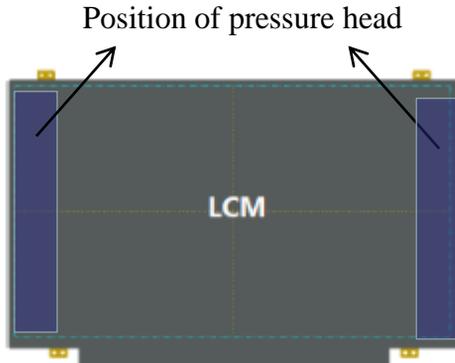


Purpose

1. LCM is fixed by A-cover by double-sided tap which can stick LCM after using the press jig stress LCM during assembling.
2. To avoid panel broken the design of pressure head of press jig can not only pin on cell panel. The pressure head needs to pin on the LCM frame, which the LCM frame can share the pressure of the pressing head.

Appendix B

Wire setting




Purpose

Wire should be placed between Protrusions and A-cover. If place the wire between LCM and Protrusions, it may interfere with LCM when assembling B-covers, or even cause LCM breakage in reliability test.

Appendix B

A-cover strength

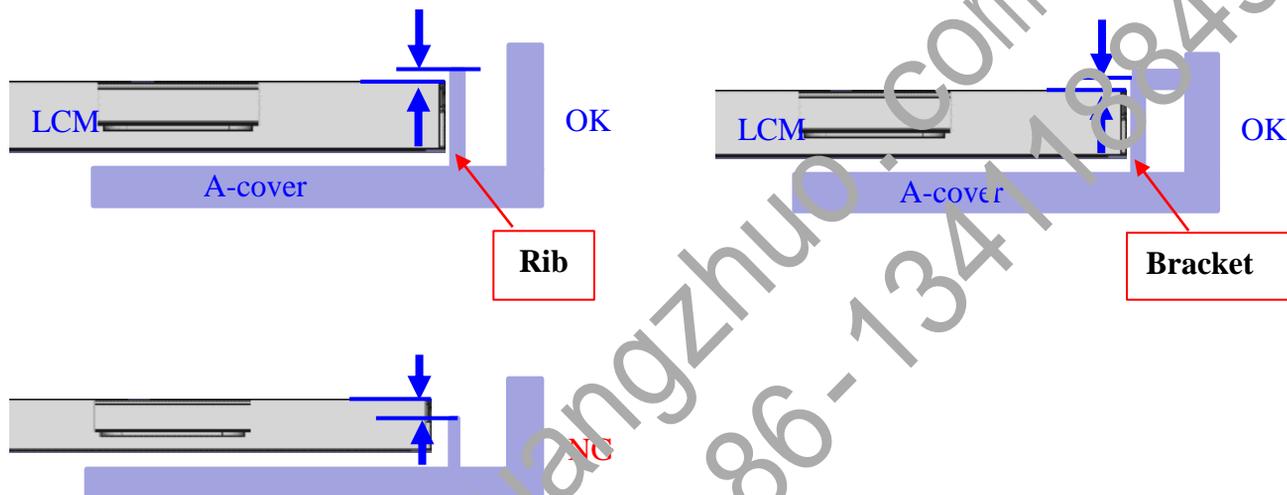


Purpose

1. It is recommended that Rib height is higher than LCM, in order to avoiding press on LCM edge panels
2. As for LCM is more stronger than Rib, the L Bracket is be recommended.

Appendix B

System A-cover Inner Surface

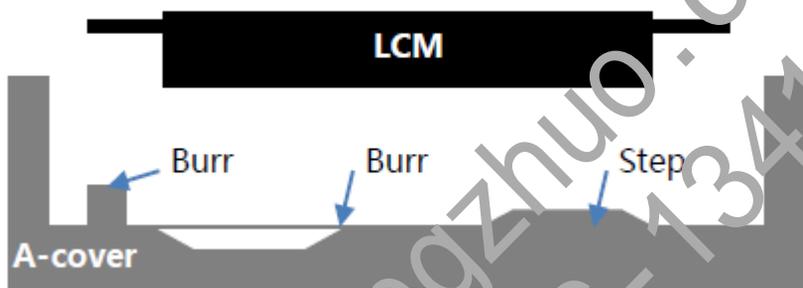


Purpose

There should not exist any burr, segment gap or protrusions beside Logo, which would cause White Spot or Glass Broken by stress concentration.

Appendix B

Keyboard area & Mouse pad

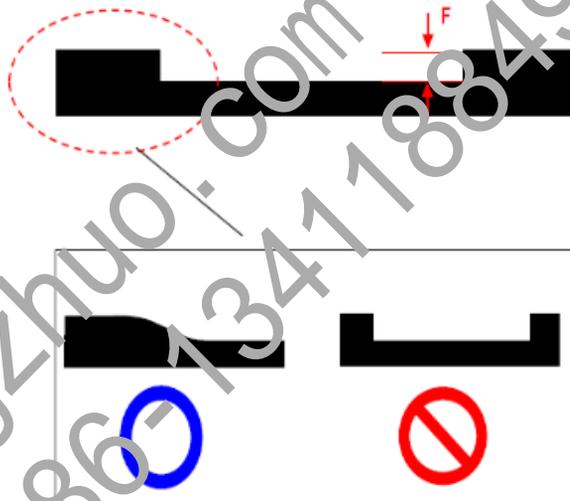


F max 0.3mm

Purpose

In order to avoiding I,CM fragments in reliability test, the step surface of Keyboard and Mouse pad transmits smoothly, and should not be right-angle. For example, when Fog testing, if the broken hole is done in this location, it is easy to produce fragments.

Appendix B

System cover reliability




Purpose

The permanent deformation part of System cover after the reliability test, including sponge and other structures or components, can not touch LCM.

Appendix B

A/B-cover near LCD PCBA

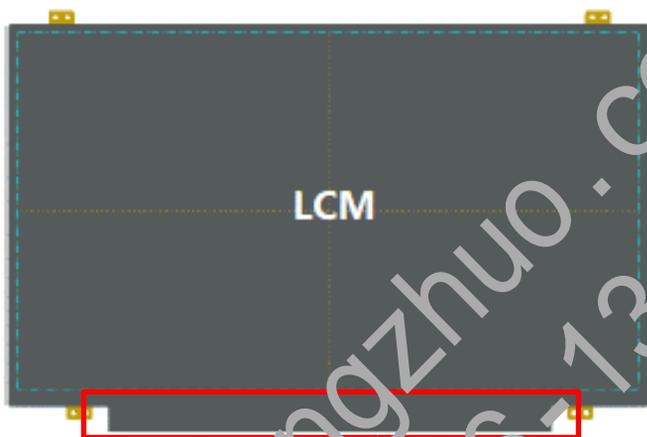

No magnetic object

Purpose

There should not have magnet object near LCM PCBA, which is prone to cause physical or electricity noise issue

Appendix B

A-cover add sponges on Boss side wall





Purpose

We suggest to attach Sponges to the side of the Boss column of A-cover to reduce the panel broken possibility in assembly. It is recommended to this design synchronously.

Appendix B

LCM to A-Cover / sponges z-gap

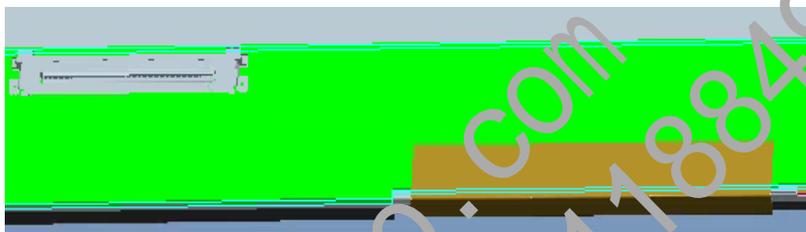


Purpose


Bent product: The position of system connector and FPC should be staggered in X direction. Otherwise, when testing, the system Cable line extrudes FPC, leading to FPC Crack; (Panel FPC Bonding location is related to Mask and can not be changed easily)

Appendix C

HPD Signal recognition

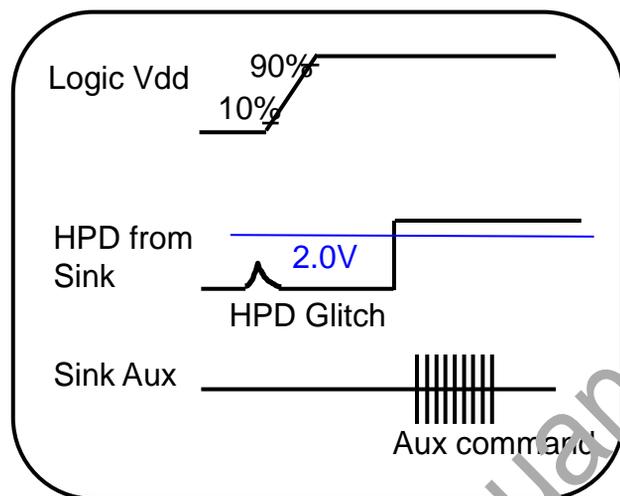

Normal Signal (Ignore HPD Glitch)

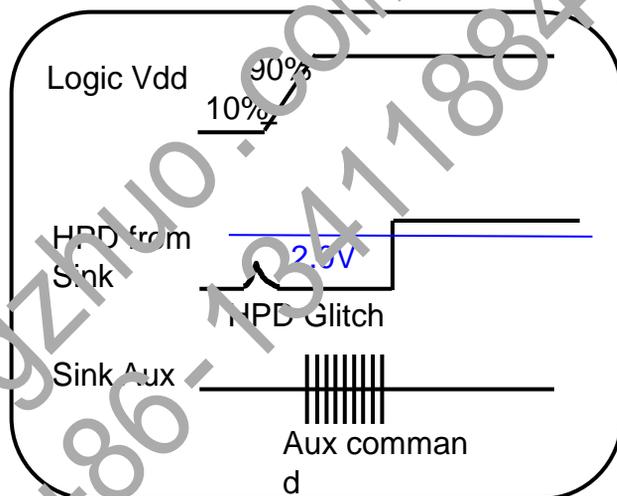


Abnormal Signal

Purpose

When HPD glitch of source device minimum is 2.0(V).

Appendix C

HPD Signal Definition IRQ (Interrupt Request)


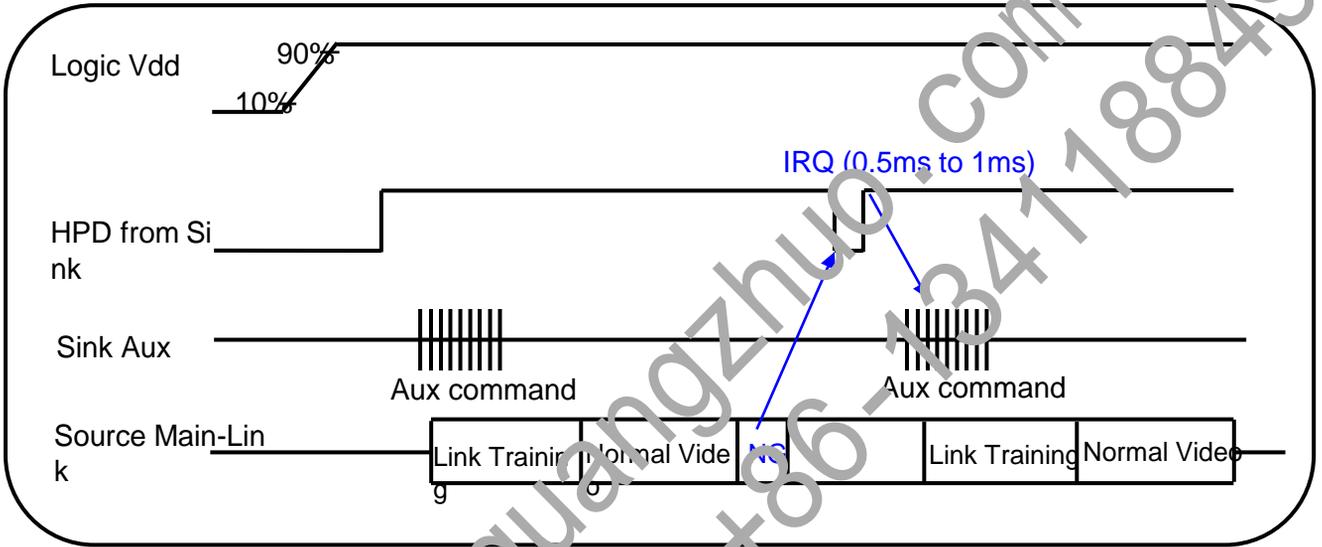


Purpose

When HPD signal low than 0.5ms to 1ms, the source device should check sink status field from the DPCD and take link training again.

Appendix C

Main link eye diagram of TP3

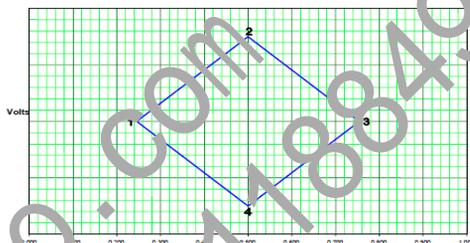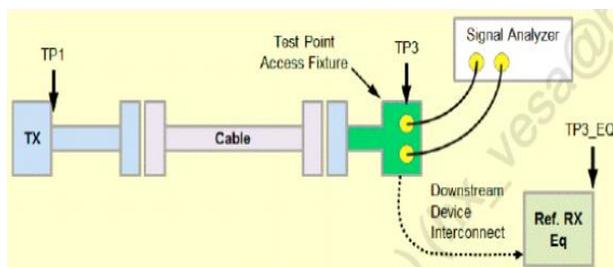

Measured TP3 on LCM connector.

Downstream Device Mask at TP3

	UI	Voltage
1	0.246	0
2	0.5	0.075
3	0.755	0
4	0.5	-0.075

Eye for TP3 at LBR

	UI	Voltage
1	0.375	0
2	0.5	0.023
3	0.625	0
4	0.5	-0.023


Eye for TP3 at RBR

Purpose

1. Main Link EYE Diagram should meet TP3 point of VESA.
2. The measure method is through access fixture.

Appendix C

Impedance Profile through a DP Connector

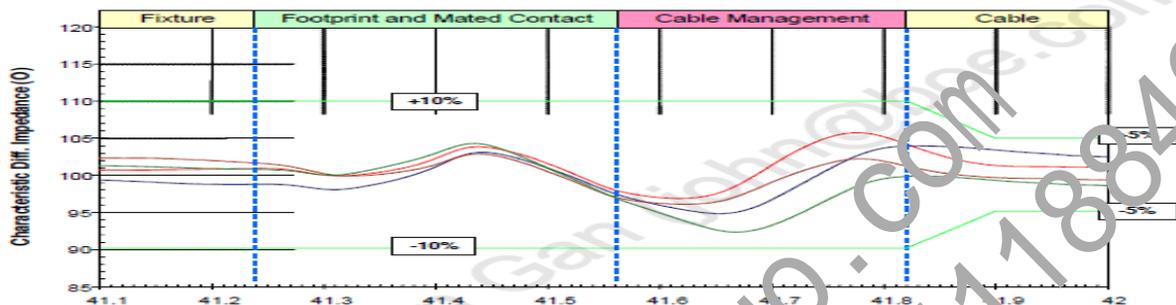

Differential Impedance Profile Measurement Data Example

Segment	Differential Impedance Value	Maximum Tolerance
Fixture	100Ω/85Ω VESA	±10%
Connector	100Ω/85Ω VESA	±10%
Wire management	100Ω/85Ω VESA	±10%
Cable	100Ω/85Ω VESA	±5%


Impedance Profile Values for Cable Assembly

Purpose

Cable Impedance Profile 100ohm for Cable Assembly

Appendix C

Main Link Pixel Freq information value of MSA data

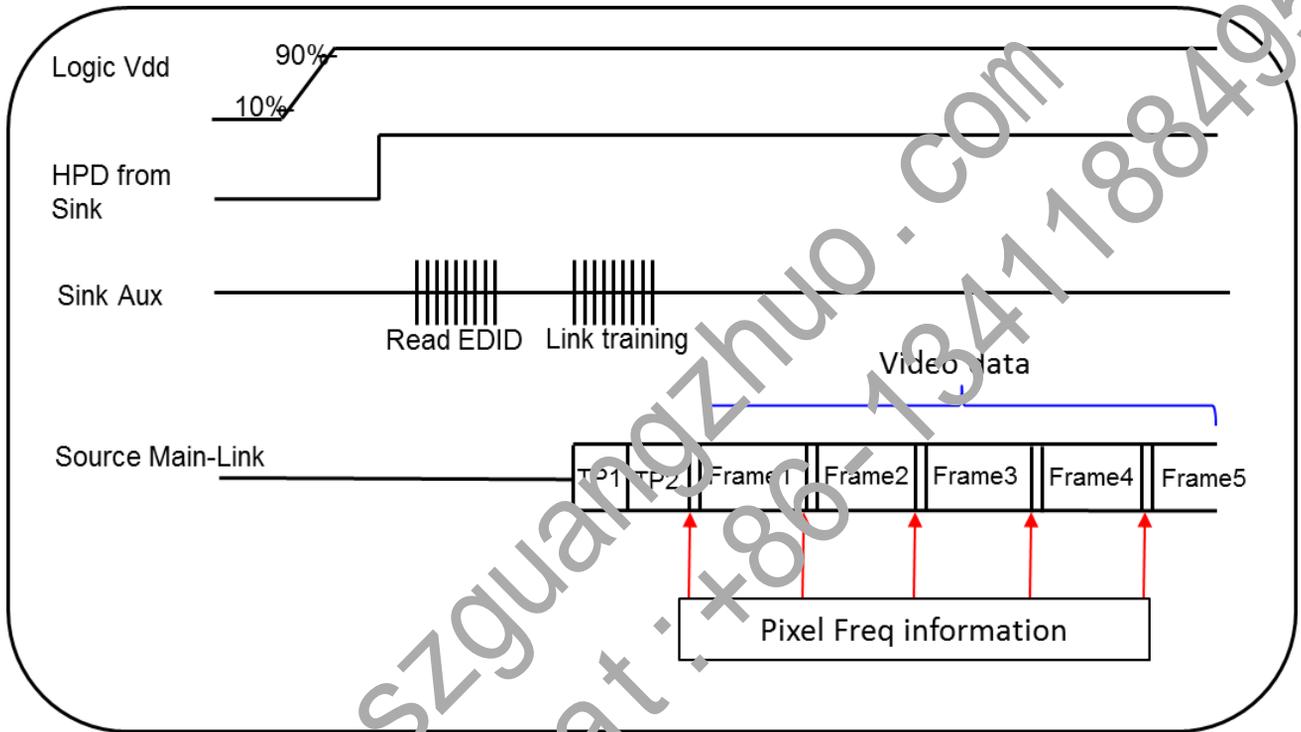


Purpose

1. It need to fix pixel freq information value of MSA data output to prevent the initial abnormal pixel freq information value from incoming after power on.
2. BOE can read DPCD to check this value. Ex: BIOS is 1.62G , but into windows is 2.7G.

Appendix C

Main Link Pixel Freq information value of MSA data

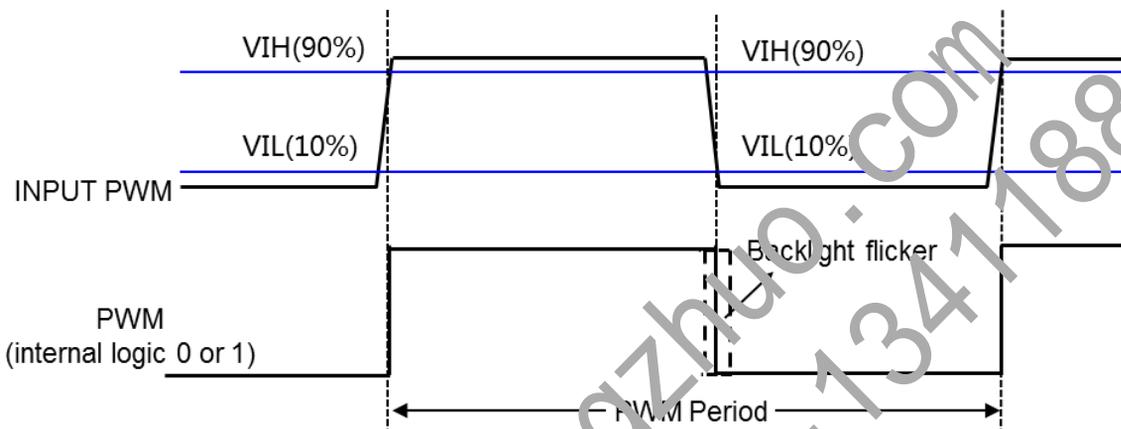

Example:

Freq	Cycle Time	PWM Rising Time	PWM Falling Time
200Hz	5ms	$\leq 1\mu s$	$\leq 1\mu s$
1KHz	1ms	$\leq 200ns$	$\leq 200ns$

Purpose

1. LED driver need to calculate the duty cycle of input PWM signal.
2. To avoid backlight flicker visible on LCD, system input PWM suggest :
PWM rising $\leq 200\text{ppm} \cdot \text{cycle time}$; PWM falling $\leq 200\text{ppm} \cdot \text{cycle time}$.