

NV140FHM-T0A**HW:V8.0****Final Product Specification****Rev. 0****BOE Optoelectronics Technology Co., Ltd**

SPEC. NUMBER

PRODUCT GROUP

Rev.

ISSUE DATE

PAGE

www.szguangzhuo.com 广卓液晶屏 echodeng61@hotmail.com jimej@jimeihk.com +86-13411884959
TFT-LCD 0 2020.04.20 1 OF 67

(✓)Final Specification

12 OF 67

Contents

No.	Items	Page
1.0	General Description	4
2.0	Absolute Maximum Ratings	7
3.0	Electrical Specifications	8
4.0	Optical Specifications	13
5.0	Interface Connection	18
6.0	Signal Timing Specification	22
7.0	Input Signals, Display Colors & Gray Scale of Colors	27
8.0	Power Sequence	28
9.0	Connector Description	30
10.0	Mechanical Characteristics	31
11.0	Reliability Test	32
12.0	Handling & Cautions	33
13.0	Label	34
14.0	Packing Information	36
15.0	Mechanical Outline Dimension	37
16.0	EDID Table	39
17.0	General Precautions	43
18.0	Appendix	45

BOE www.szguangzhuo.com 广卓液晶 echodeng61@hotmail.com jimei@jimeihk.com +86-13411884959	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	Rev. 0	2020.04.20

1.0 GENERAL DESCRIPTION

1.1 Introduction

NV140FHM-T0A V8.0 is a color active matrix TFT LCD module using amorphous silicon TFT's (Thin Film Transistors) as an active switching devices. This module has a 14.0 inch diagonally measured active area with Full-HD resolutions (1920 horizontal by 1080 vertical pixel array). Each pixel is divided into RED, GREEN, BLUE dots which are arranged in vertical stripe and this module can display 262k(6bit) colors and color gamut 45%. The TFT-LCD panel use On cell Touch Structure and used for this module is a low reflection and higher color type. Therefore, this module is suitable for Notebook PC. The LED driver for back-light driving is built in this model. All input signals are eDP1.2 interface compatible.

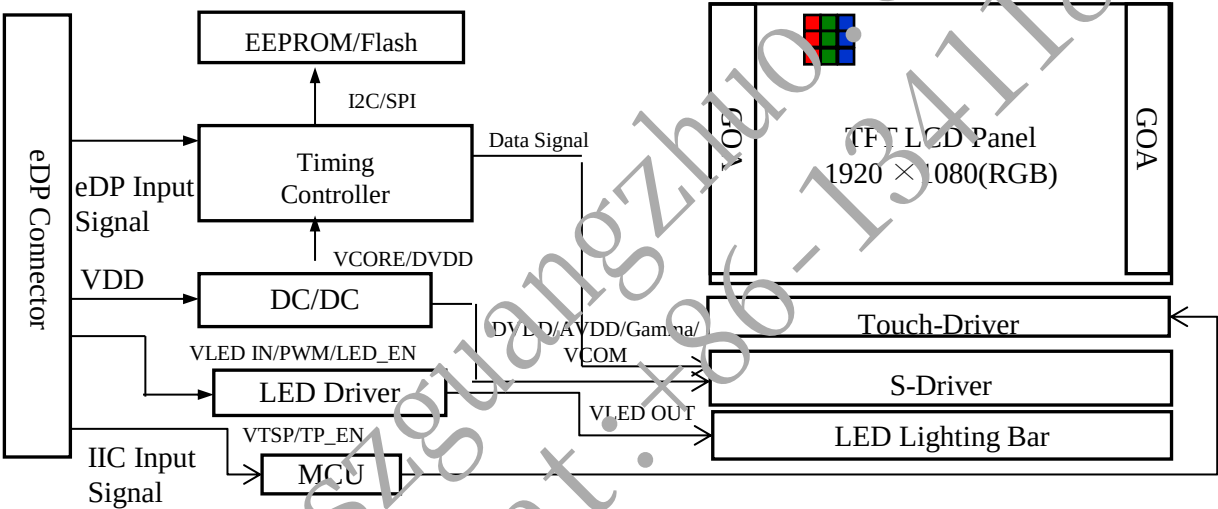


Figure 1. Drive Architecture

1.2 Features

- 2 lane eDP interface with 2.7Gbps link rates
- Thin and light weight
- 262k(6bit) color depth, color gamut 45%
- Support OS : Win8.x and Win10 compliant
- Single LED lighting bar (Bottom side/Horizontal Direction)
- Data enable signal mode
- Green product (RoHS & Halogen free product)
- On board LED driving circuit
- Low driving voltage and low power consumption
- On board EDID chip
- DPCD Version: 1.1

SPEC. NUMBER	SPEC. TITLE	PAGE
www.szguangzhuo.com 广卓液晶 echodeng61@hotmail.com jimei@jimeihk.com +86-13411884959	NV140FHM-T0A V8.0 Product Specification Rev. 0	4 OF 67

	PRODUCT GROUP www.szguangzhuo.com 广卓液晶屏 echodeng61@hotmail.com jimei@jimeihk.com +86-13411884959	REV	ISSUE DATE
	Customer Spec	Rev. 0	2020.04.20

1.3 Application

- Notebook PC (Wide type)

1.4 General Specification

The followings are general specifications at the model NV140FHM-T0A V8.0. (listed in Table 1)

<Table 1. General Specifications>

Parameter	Specification	Unit	Remarks
Active area	309.312 (H) ×173.988 (V)	mm	
Number of pixels	1920 (H) × 1080 (V)	pixels	
Pixel pitch	161.1(H) × 161.1(V)	um	
Pixel arrangement	RGB Vertical stripe		
Display colors	262k(6bit)		
Color gamut	45%		
Display mode	Normally Black		
Dimensional outline	315.812±0.3 (H)*186.068±0.3(V) (W/O PCB)*3.0 (Max) 315.812±0.3 (H)*186.068±0.3(V) (W/PCB)*5.0(Max)	mm	
Weight	305(max)	g	
Surface treatment	Anti-Glare		
Surface hardness	3H		
Back-light	Bottom edge side, 1-LED lighting bar type		Note 1
Power consumption	P _D : 0.9(Max)	W	@Mosaic
	P _T : 0.3(Max)	W	@Active
	P _{BL} : 2.77(Max)	W	
	P _{Total} : 3.97(Max)	W	@Mosaic

Notes : 1. LED Lighting Bar (36*LED Array)

SPEC. NUMBER	SPEC. TITLE	PAGE
www.szguangzhuo.com 广卓液晶屏 echodeng61@hotmail.com jimei@jimeihk.com +86-13411884959	NV140FHM-T0A V8.0 Product Specification Rev. 0	5 OF 67

1.5 Touch General Specification

The followings are touch general specifications at the model NV140FHM-T0A V8.0. (listed in Table

2)

<Table 2. General Specifications>

Parameter	Specification	Unit	Remarks
Type of Touch Sensor	Self Capacitance		
Touch Structure	On Cell		
Panel Size	14.0"		
TP Active Area	309.312(H) × 173.088(V)	mm	
Surface treatment	Anti-Glare		
Surface Hardness	3H	H	
Interface	IIC		
Report Rate	Follow win10/100	Hz	
Multi-Touch Point	10 points		
Input method	Finger		
Touch panel sensor IC	G7500		G2 Touch
Channel	1500		
Support OS	Win8.x and Win10 compliant		
TP Power Consumption	0.3 (max)	W	
TP FW Version	R00.29.14345		

2.0 ABSOLUTE MAXIMUM RATINGS

The followings are maximum values which, if exceed, may cause faulty operation or damage to the unit. The operational and non-operational maximum voltage and current values are listed in Table 3.

< Table 3. Absolute Maximum Ratings >

Ta=25+/-2°C

Parameter	Symbol	Min.	Max.	Unit	Remarks
Power Supply Voltage	V _{DD}	-0.3	4.0	V	Note 1
eDP input Voltage	V _{eDP}	-0.3	2.2	V	
Logic Supply Voltage	V _{IN}	V _{SS} -0.3	V _{DD} +0.3	V	
Operating Temperature	T _{OP}	0	+50	°C	Note 2
Storage Temperature	T _{ST}	-20	+60	°C	

Notes :

1. Permanent damage to the device may occur if maximum values are exceeded functional operation should be restricted to the condition described under normal operating conditions.

2. Temperature and relative humidity range are shown in the figure below.

95% RH Max. (40 °C ≥ Ta) Maximum wet - bulb temperature at 39 °C or less. (Ta > 40 °C) No condensation.

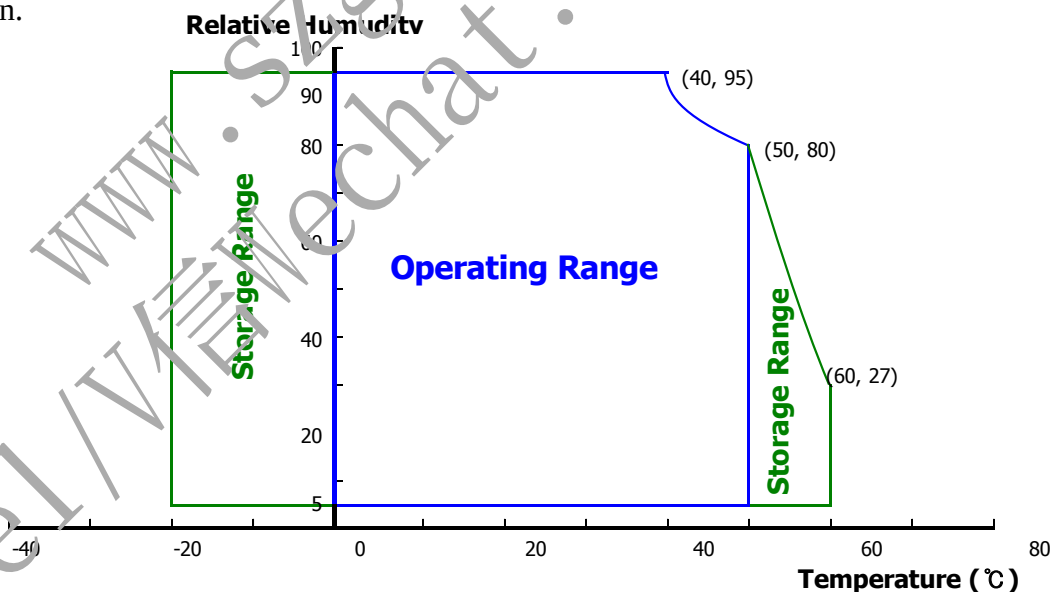


Figure 2. Temperature and Relative Humidity Range

3.0 ELECTRICAL SPECIFICATIONS

3.1 Electrical Specifications

< Table 4. Electrical Specifications >

Ta=25+/-2℃

Parameter			Min.	Typ.	Max.	Unit	Remarks
Power Supply Voltage		V _{DD}	3.0	3.3	3.6	V	Note 1
Permissible Input Ripple Voltage		V _{RF}	-10% VDD	-	+10% VDD	V	@ V _{DD} = 3.3V
Power Supply Inrush Current		Inrush	-	-	2	A	Note3
Power Supply Current	Mosaic	I _{DD}	-	-	272	mA	Note1
	RGB		-	-	364	mA	
Power Consumption	Mosaic	P _M	-	-	0.9	W	
	RGB	P _{RGB}	-	-	1.2	W	
	BLU	P _{BL}	-	-	2.77	W	Note 2
	Total	P _{Total}	-	-	3.97	W	@mosaic

BOE www.szguangzhuo.com 广卓液晶 echodeng61@hotmail.com jimei@jimeihk.com +86-13411884959	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	Rev. 0	2020.04.20

3.0 ELECTRICAL SPECIFICATIONS

3.1 Electrical Specifications

Notes :

- The supply voltage is measured and specified at the interface connector of LCM.
The current draw and power consumption specified is for 3.3V at 25 °C.
 - Mosaic pattern 8*8
 - R/G/B patterns

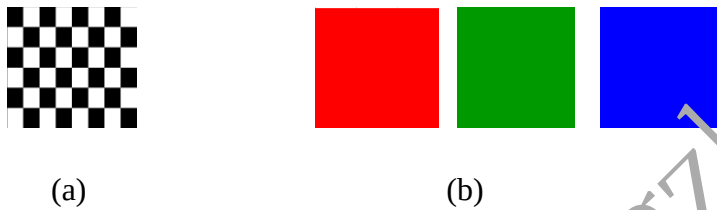


Figure 3. Power Measure Patterns

- Calculated value for reference ($V_{LED} \times I_{LED}$)
- Measure condition (Figure 4)

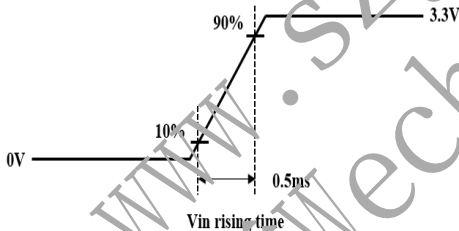


Figure 4. Inrush Measure Condition

SPEC. NUMBER	SPEC. TITLE	PAGE
www.szguangzhuo.com 广卓液晶 echodeng61@hotmail.com jimei@jimeihk.com +86-13411884959	NV140FHM-T0A V8.0 Product Specification Rev. 0	9 OF 67

3.2 Touch Electrical Specifications

< Table 5. Electrical specifications >

Parameter			Min.	Typ.	Max.	Unit	Remarks
Power Supply Voltage		V _{DD}	3.0	3.3	3.6	V	Note 1
Permissible Input Ripple Voltage		V _{RF}	-	-	100	mV	At V _{DD} = 3.3V
Power Supply Current		I _{DD}	-	-	61	mA	
Power Consumption	Active Mode	P _T	-	-	0.2	W	Note1
	Idle Mode		-	-	0.1	W	Note2
TP_EN	High Level		0.8* VDDIO	-	-	V	@VDDIO = 3.3
	Low Level		-	-	0.15* VDDIO	V	

Notes : 1. The supply voltage is measured and specified at the interface connector of TLCM
The current draw and power consumption specified is for 3.3V at 25℃ when touch function is active;
2. The supply voltage is measured and specified at the interface connector of TLCM
The current draw and power consumption specified is for 3.3V at 25℃ when touch function is Idle;

3.3 Backlight Unit

< Table 6. LED Driving Guideline Specifications >
Ta=25+/-2°C

Parameter		Min.	Typ.	Max.	Unit	Remarks
LED Forward Voltage	V_F	-	-	2.9	V	
LED Forward Current	I_F	-	21.2	-	mA	
LED Power Input Voltage	V_{LED}	5	12	21	V	
LED Power Input Current	I_{LED}	-	-	230.83	mA	
LED Power Consumption	P_{LED}	-	-	2.77	W	Note 1
Power Supply Voltage for LED Driver Inrush	I_{led} inrush	-	-	1.5	V	Note 4
LED Life-Time	N/A	15,000	-	-	Hour	$I_F = 21.2$
EN Control Level	Backlight On	2.5	-	5.0	V	
	Backlight Off	0	-	0.5	V	
PWM Control Level	High Level	2.5	-	5.0	V	
	Low Level	0	-	0.5	V	
PWM Control Frequency	F_{PWM}	200	-	2,000	Hz	
Duty Ratio		5	-	100	%	Note 3

Notes :

- Power supply voltage12V for LED driver.
 Calculator value for reference $I_F \times V_F \times 36$ /driver efficiency = PLED
- The LED life-time define as the estimated time to 50% degradation of initial luminous.
- 1% duty cycle is achievable with a dimming frequency less than 1KHz.
- Measure condition (Figure 5)

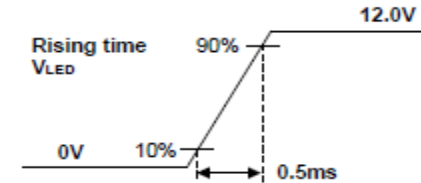


Figure 5. Inrush Measure Condition

BOE www.szguangzhuo.com 广卓液晶 echodeng61@hotmail.com jimei@jimeihk.com +86-13411884959	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	Rev. 0	2020.04.20

3.4 LED Structure

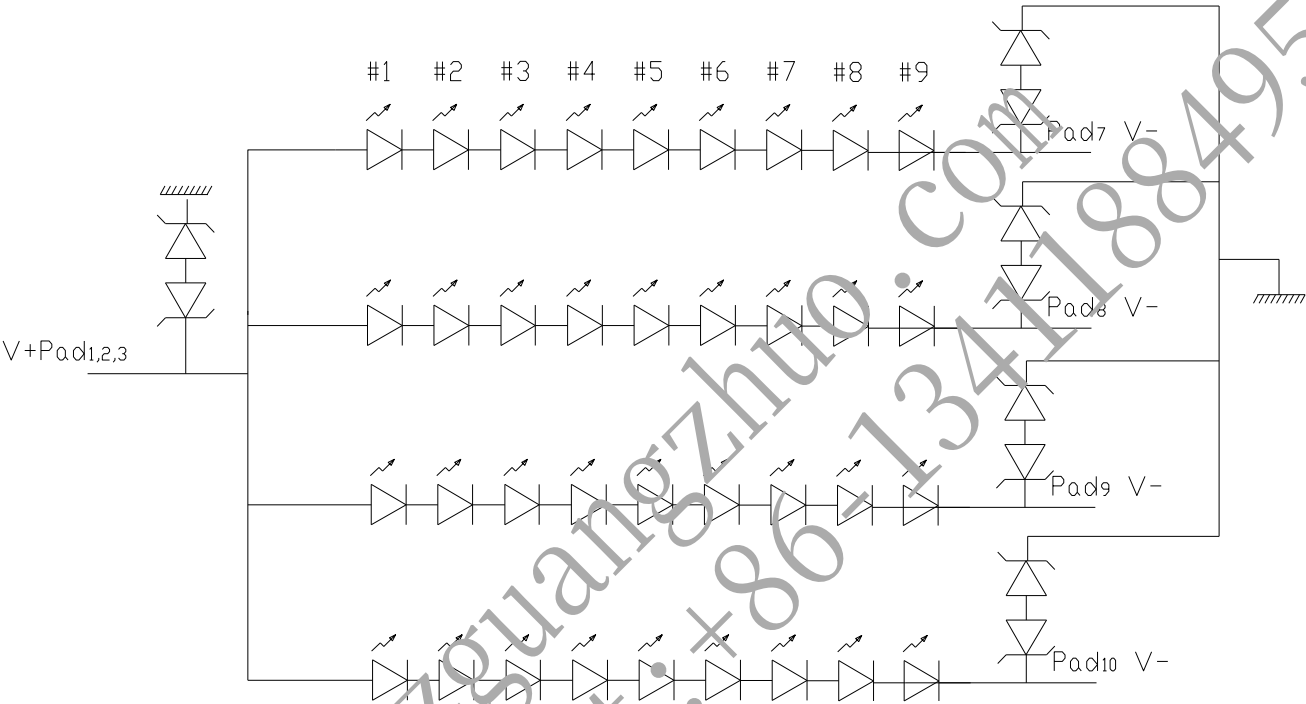


Figure 6. LED Structure

SPEC. NUMBER	SPEC. TITLE	PAGE
www.szguangzhuo.com 广卓液晶 echodeng61@hotmail.com jimei@jimeihk.com +86-13411884959	NV140FHM-T0A V8.0 Product Specification Rev. 0	12 OF 67

4.0 OPTICAL SPECIFICATION

4.1 Overview

The test of optical specifications shall be measured in a dark room (ambient luminance ≤ 1 lux and temperature = $25\pm 2^{\circ}\text{C}$) with the equipment of luminance meter system (PR730&PR810) and test unit shall be located at an approximate distance 50cm from the LCD surface at a viewing angle of θ and ϕ equal to 0° . We refer to $\theta\phi=0$ ($=03$) as the 3 o'clock direction (the "right"), $\theta\phi=90$ ($=012$) as the 12 o'clock direction ("upward"), $\theta\phi=180$ ($=09$) as the 9 o'clock direction ("left") and $\theta\phi=270$ ($=06$) as the 6 o'clock direction ("bottom"). While scanning θ and/or ϕ , the center of the measuring spot on the display surface shall stay fixed. The backlight should be operating for 30 minutes prior to measurement. VDD shall be $3.3\pm 0.3\text{V}$ at 25°C . Optimum viewing angle direction is 6 o'clock.


4.2 Optical Specifications

<Table 7. Optical Specifications>

Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit	Remark
Viewing Angle Range	Horizontal	Θ_3	CR > 10	80	85	-	Deg.	Note 1
		Θ_9		80	85	-	Deg.	
	Vertical	Θ_{12}		80	85	-	Deg.	
		Θ_6		80	85	-	Deg.	
Luminance Contrast Ratio		CR	$\Theta = 0^{\circ}$	600	800	-		Note 2
Luminance of White	5 Points	Y_w	$\Theta = 0^{\circ}$ MED 21.2	212.5	250	-	cd/m ²	Note 3
White Luminance Uniformity	5 Points	ΔY_5		-	-	-	%	Note 4
	13 Points	ΔY_{13}		62.5	71.4	-	%	
White Chromaticity		W_x	$\Theta = 0^{\circ}$	0.283	0.313	0.343		Note 5
		W_y		0.299	0.329	0.359		
Reproduction of Color	Red	R_x	$\Theta = 0^{\circ}$	Typ.-0.03	0.590	Typ.+0.03		
		R_y			0.350			
	Green	G_x			0.330			
		G_y			0.555			
	Blue	B_x			0.153			
		B_y			0.119			
Color Gamut				-	45	-	%	
Response Time (Rising + Falling)		T_{RT}	Ta= 25°C $\Theta = 0^{\circ}$	-	30	35	ms	Note 6
Cross Talk		CT	$\Theta = 0^{\circ}$	-	-	2.0	%	Note 7

	PRODUCT GROUP www.szguangzhuo.com 广卓液晶屏 echodeng61@hotmail.com jimei@jimeihk.com +86-13411884959	REV jimei@jimeihk.com +86-13411884959	ISSUE DATE 13411884959
	Customer Spec	Rev. 0	2020.04.20
Notes : - Viewing angle is the angle at which the contrast ratio is greater than 10. The viewing angles are determined for the horizontal or 3, 9 o'clock direction and the vertical or 6, 12 o'clock direction with respect to the optical axis which is normal to the LCD surface (see Figure 7). - Contrast measurements shall be made at viewing angle of $\Theta = 0$ and at the center of the LCD surface. Luminance shall be measured with all pixels in the view field set first to white then to the dark (black) state . (see Figure 7) Luminance Contrast Ratio (CR) is defined mathematically. $CR = \frac{\text{Luminance when displaying a white raster}}{\text{Luminance when displaying a black raster}}$ - Center Luminance of white is defined as luminance values of 5 point average across the LCD surface. Luminance shall be measured with all pixels in the view field set first to white. This measurement shall be taken at the locations shown in Figure 8 for a total of the measurements per display. - The White luminance uniformity on LCD surface is then expressed as : $\Delta Y = \text{Minimum Luminance of 5(or 13) points} / \text{Maximum Luminance of 5(or 13) points.}$(see Figure 8 and Figure 9). - The color chromaticity coordinates specified in Table 5 shall be calculated from the spectral data measured with all pixels first in red, green, blue and white. Measurements shall be made at the center of the panel. - The electro-optical response time measurements shall be made as Figure 10 by switching the “data” input signal ON and OFF. The times needed for the luminance to change from 10% to 90% is T_r, and 90% to 10% is T_f. - Cross-Talk of one area of the LCD surface by another shall be measured by comparing the luminance (YA) of a $10 \pm 1\text{mm}$ diameter area, with all display pixels set to gray 127(of 0 to 255), to the luminance (YB) of that same area when any adjacent area is driven dark . The luminance ratio shall not exceed 1:1.05 (See Figure 11).			
SPEC. NUMBER www.szguangzhuo.com 广卓液晶屏 echodeng61@hotmail.com jimei@jimeihk.com +86-13411884959	SPEC. TITLE NV140FHM-T0A V8.0 Product Specification Rev. 0	PAGE 14 OF 67	

4.3 Optical Measurements

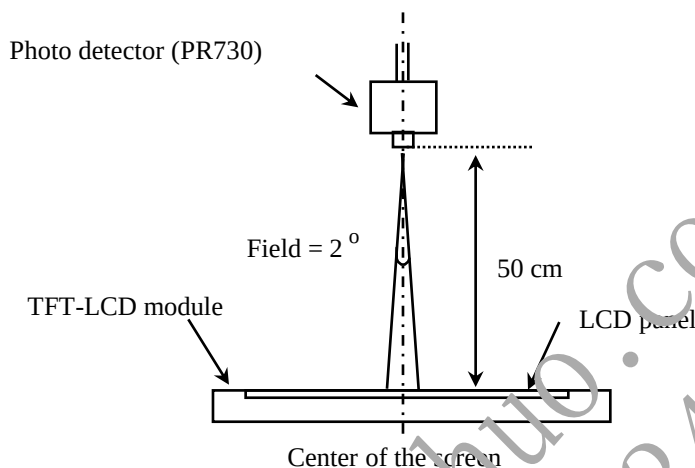

Optical characteristics measurement setup

Figure 7. Measurement Set Up


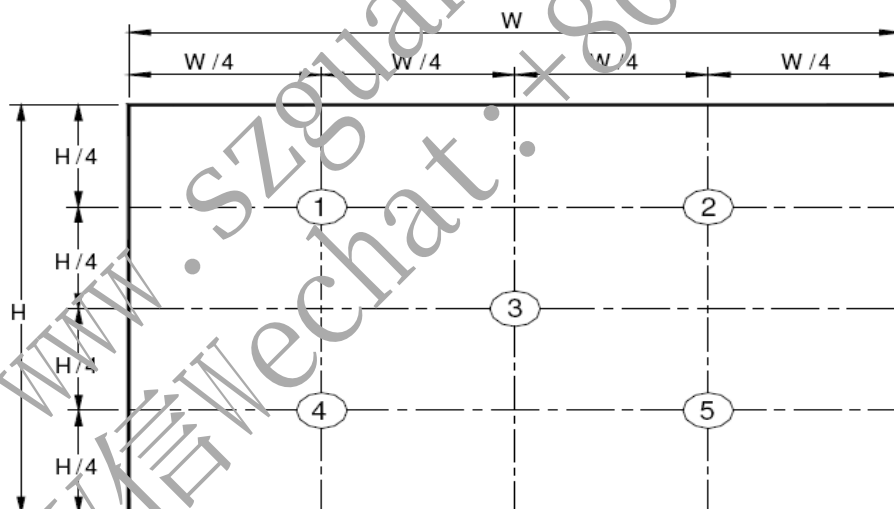


Figure 8. White Luminance and Uniformity Measurement Locations (5 points)

Center Luminance of white is defined as luminance values of center 5 points across the LCD surface. Luminance shall be measured with all pixels in the view field set first to white. This measurement shall be taken at the locations shown in Figure 7 for a total of the measurements per display.

BOE www.szguangzhuo.com 广卓液晶屏 echodeng61@hotmail.com jimei@jimeihk.com +86-13411884959	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	Rev. 0	2020.04.20

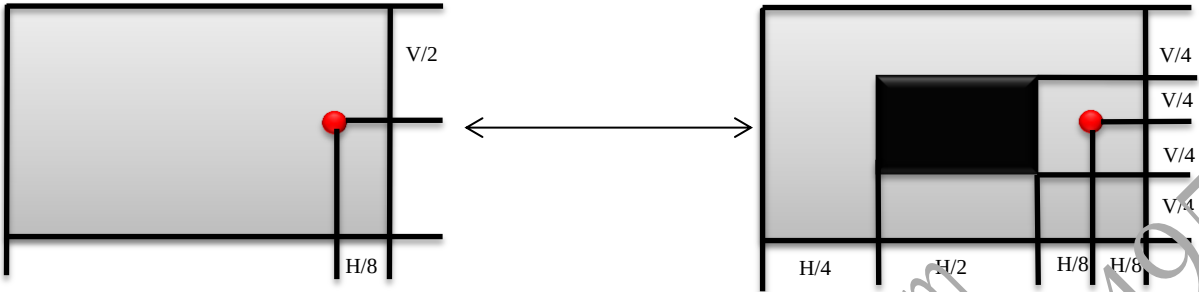

$$\text{Cross Talk (\%)} = \left| \frac{Y_B - Y_A}{Y_B} \right| \times 100$$

Figure 11. Cross Talk Modulation Test Description

Where:

Y_A = Initial luminance of measured area (cd/n²)

Y_B = Subsequent luminance of measured area (cd/m²)

The location measured will be exactly the same in both patterns. The test background gray is L127.

Cross Talk of one area of the LCD surface by another shall be measured by comparing the luminance (YA) of a 10±1mm diameter area, with all display pixels set to a gray level 127, to the luminance (YB) of that same area when any adjacent area is driven dark.(Refer to Figure 11)

The test system: PR730

SPEC. NUMBER	SPEC. TITLE	PAGE
www.szguangzhuo.com 广卓液晶屏 echodeng61@hotmail.com jimei@jimeihk.com +86-13411884959	NV140FHM-T0A V8.0 Product Specification Rev. 0	17 OF 67

5.0 INTERFACE CONNECTION

5.1 Electrical Interface Connection

The electronics interface connector is STM MSAK24025P40.

The connector interface pin assignments are listed in Table 8.

<Table 8. Pin Assignments for the Interface Connector>

PIN NO	Symbol Function	Description	PIN NO	Symbol Function	Description
1	DCR Enable Function	Disable	21	BL_GND	Backlight ground
2	H_GND	High Speed Ground	22	BL_Enable	Backlight on / Off
3	Lane1_N	Comp Signal Link Lane 1	23	BL_PWM_DIM	System PWM signal Input
4	Lane1_P	True Signal Link Lane 1	24	NC	No connect (Reverse for TEST only)
5	H_GND	High Speed Ground	25	NC	No connect (Reverse for TEST only)
6	Lane0_N	Comp Signal Link Lane 0	26	BL_PWR	Backlight power (5V~21V)
7	Lane0_P	True Signal Link Lane 0	27	BL_PWR	Backlight power (5V~21V)
8	H_GND	High Speed Ground	28	BL_PWR	Backlight power (5V~21V)
9	AUX_CH_P	True Signal Auxiliary Ch.	29	BL_PWR	Backlight power (5V~21V)
10	AUX_CH_N	Comp Signal Auxiliary Ch.	30	NC	No Connect (Reserved for CM)
11	H_GND	High Speed Ground	31	TP_D-	Reserved for USB DATA- For Touch
12	LCD_VCC	LCD logic and driver power	32	TP_D+	Reserved for USB DATA+ For Touch
13	LCD_VCC	LCD logic and driver power	33	GND	Ground Shield
14	NC	No Connect	34	VTSP	Touch panel power supply (3.3V)
15	LCD_GND	LCD logic and driver ground	35	VTSP	Touch panel power supply (3.3V)
16	LCD_GND	LCD logic and driver ground	36	TP_EN	Touch Function Enable Pin
17	HPD	HPD signal pin	37	TP_CLK	I2C Clock for Touch
18	BL_GND	Backlight ground	38	TP_Data	I2C Data for Touch
19	BL_GND	Backlight ground	39	INT	Interrupt for Touch
20	BL_GND	Backlight ground	40	RST	Reset for Touch

5.2 eDP Interface

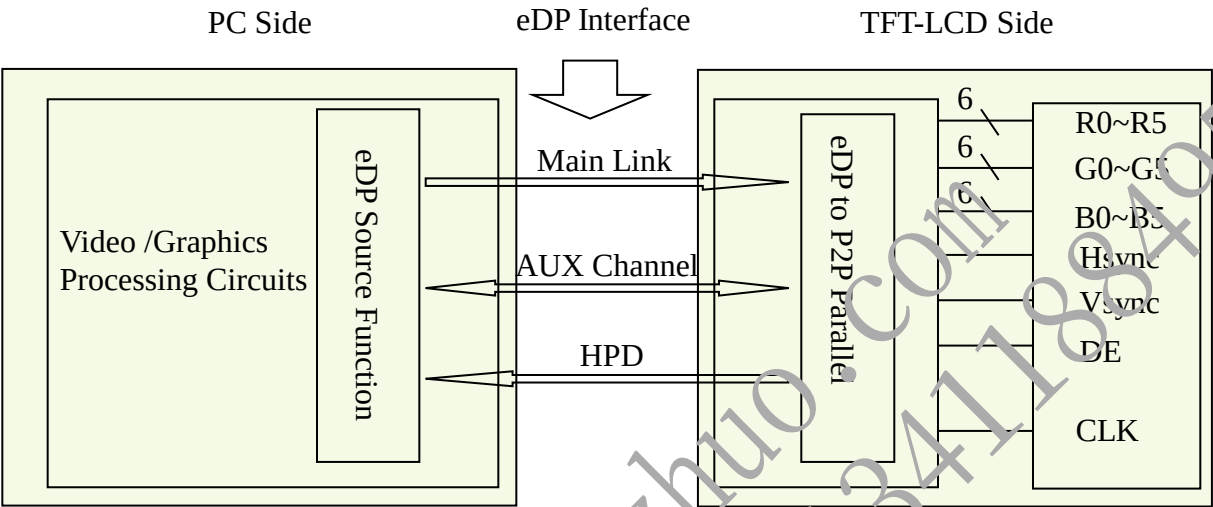


Figure 12. eDP Interface Architecture

Note:
Transmitter : Parade DP501 or equivalent
Transmitter is not contained in module.

5.3 Data Input Format

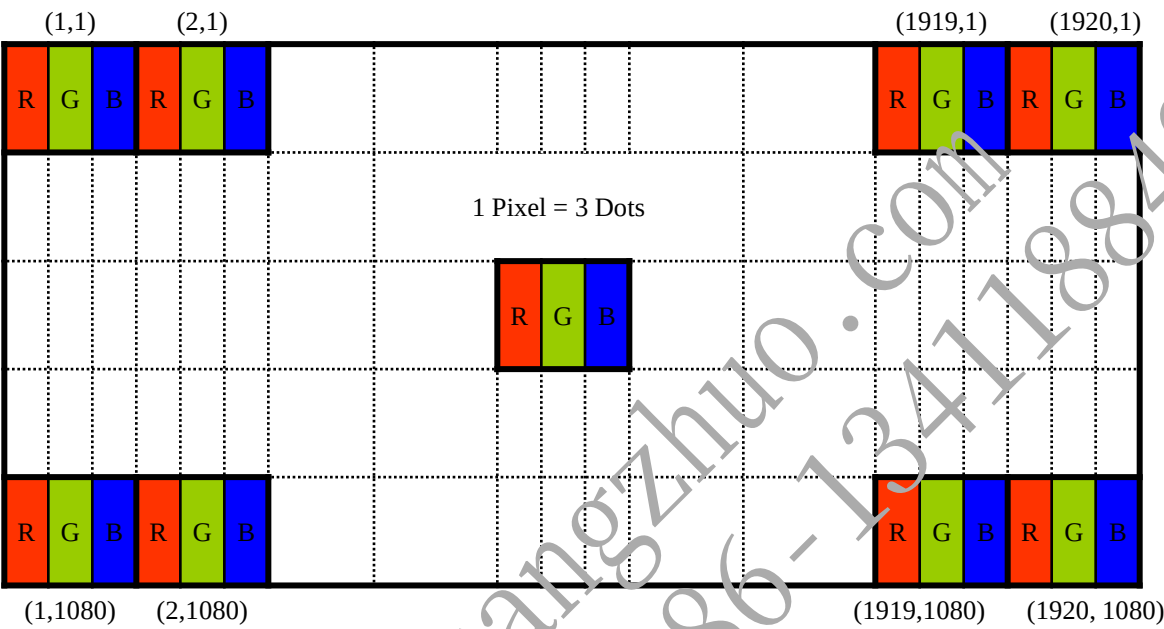


Figure 13. Display Position of Input Data (V-H)

5.4 Back-light & LCM Interface Connection

BLU Interface Connector: STM MSK24022P10 .

<Table 9. Pin Assignments for the BLU Connector>

Pin No.	Symbol	Description	Pin No.	Symbol	Description
1	Vout	LED anode connection	6	NC	No Connection
2	Vout	LED anode connection	7	LED	LED cathode connection
3	Vout	LED anode connection	8	LED	LED cathode connection
4	NC	No Connection	9	LED	LED cathode connection
5	NC	GND	10	LED	LED cathode connection

6.0 SIGNAL TIMING SPECIFICATION

6.1 The NV140FHM-T0A V8.0 Is Operated By The DE Only

< Table 10. Signal Timing Specification >

Item		Symbols	Min	Typ	Max	Unit
Clock	Frequency	1/Tc	139.9	150.5	155.2	MHz
Frame Period		Tv	1100	1140	1160	lines
			-	60	-	Hz
			-	16.67	-	ms
Vertical Display Period		Tvd	-	1080	-	lines
One line Scanning Period		Th	2120	2200	2230	clocks
Horizontal Display Period		Thd	-	1920	-	clocks

Note : The above is as optimized setting.

6.2 eDP Rx Interface Timing Parameter

The specification of the eDP Rx interface timing parameter is shown in Table 11.

<Table 11. eDP Main-Link RX TP4 Package Pin Parameters>

Item	Symbol	Min	Typ	Max	Unit	Remark
Spread spectrum clock (Link clock down-spreading)	SSC	-	-	0.5	%	
Differential peak-to-peak input voltage at package pins	VRX-DIFFp-p	120	-	1200	mV	
Rx input DC common mode voltage	VRX_DC_CM	0	-	2	V	
Differential termination resistance	RRX-DIFF	80	-	100	Ω	
Single-ended termination resistance	RRX-SE	40	-	60	Ω	
Rx short circuit current limit	IRX_SHORT	-	-	20	mA	
Intra-pair skew at Rx package pins (HBR) RX intra-pair skew tolerance at HBR	LRX_SKEW, INTRA_PAIR	-	-	60	ps	
AC Coupling Capacitor	C _{SOURCE_ML}	75		200	nF	Source side


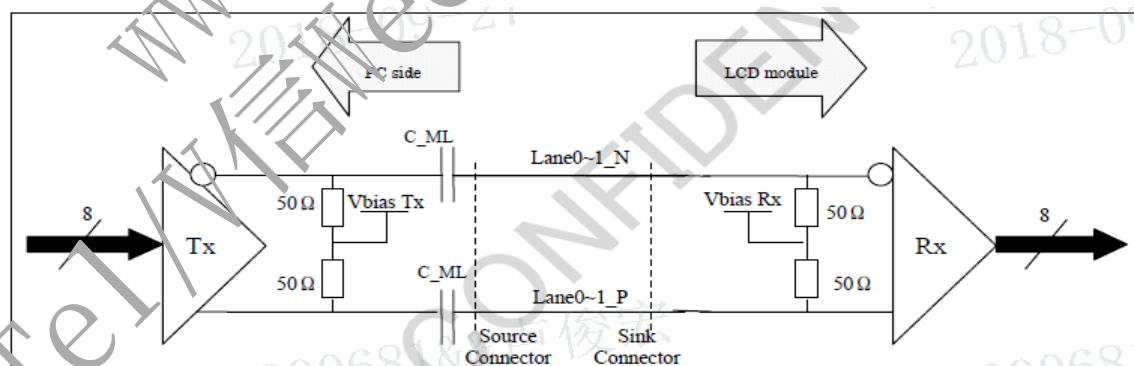


Figure 14. Main link differential pair

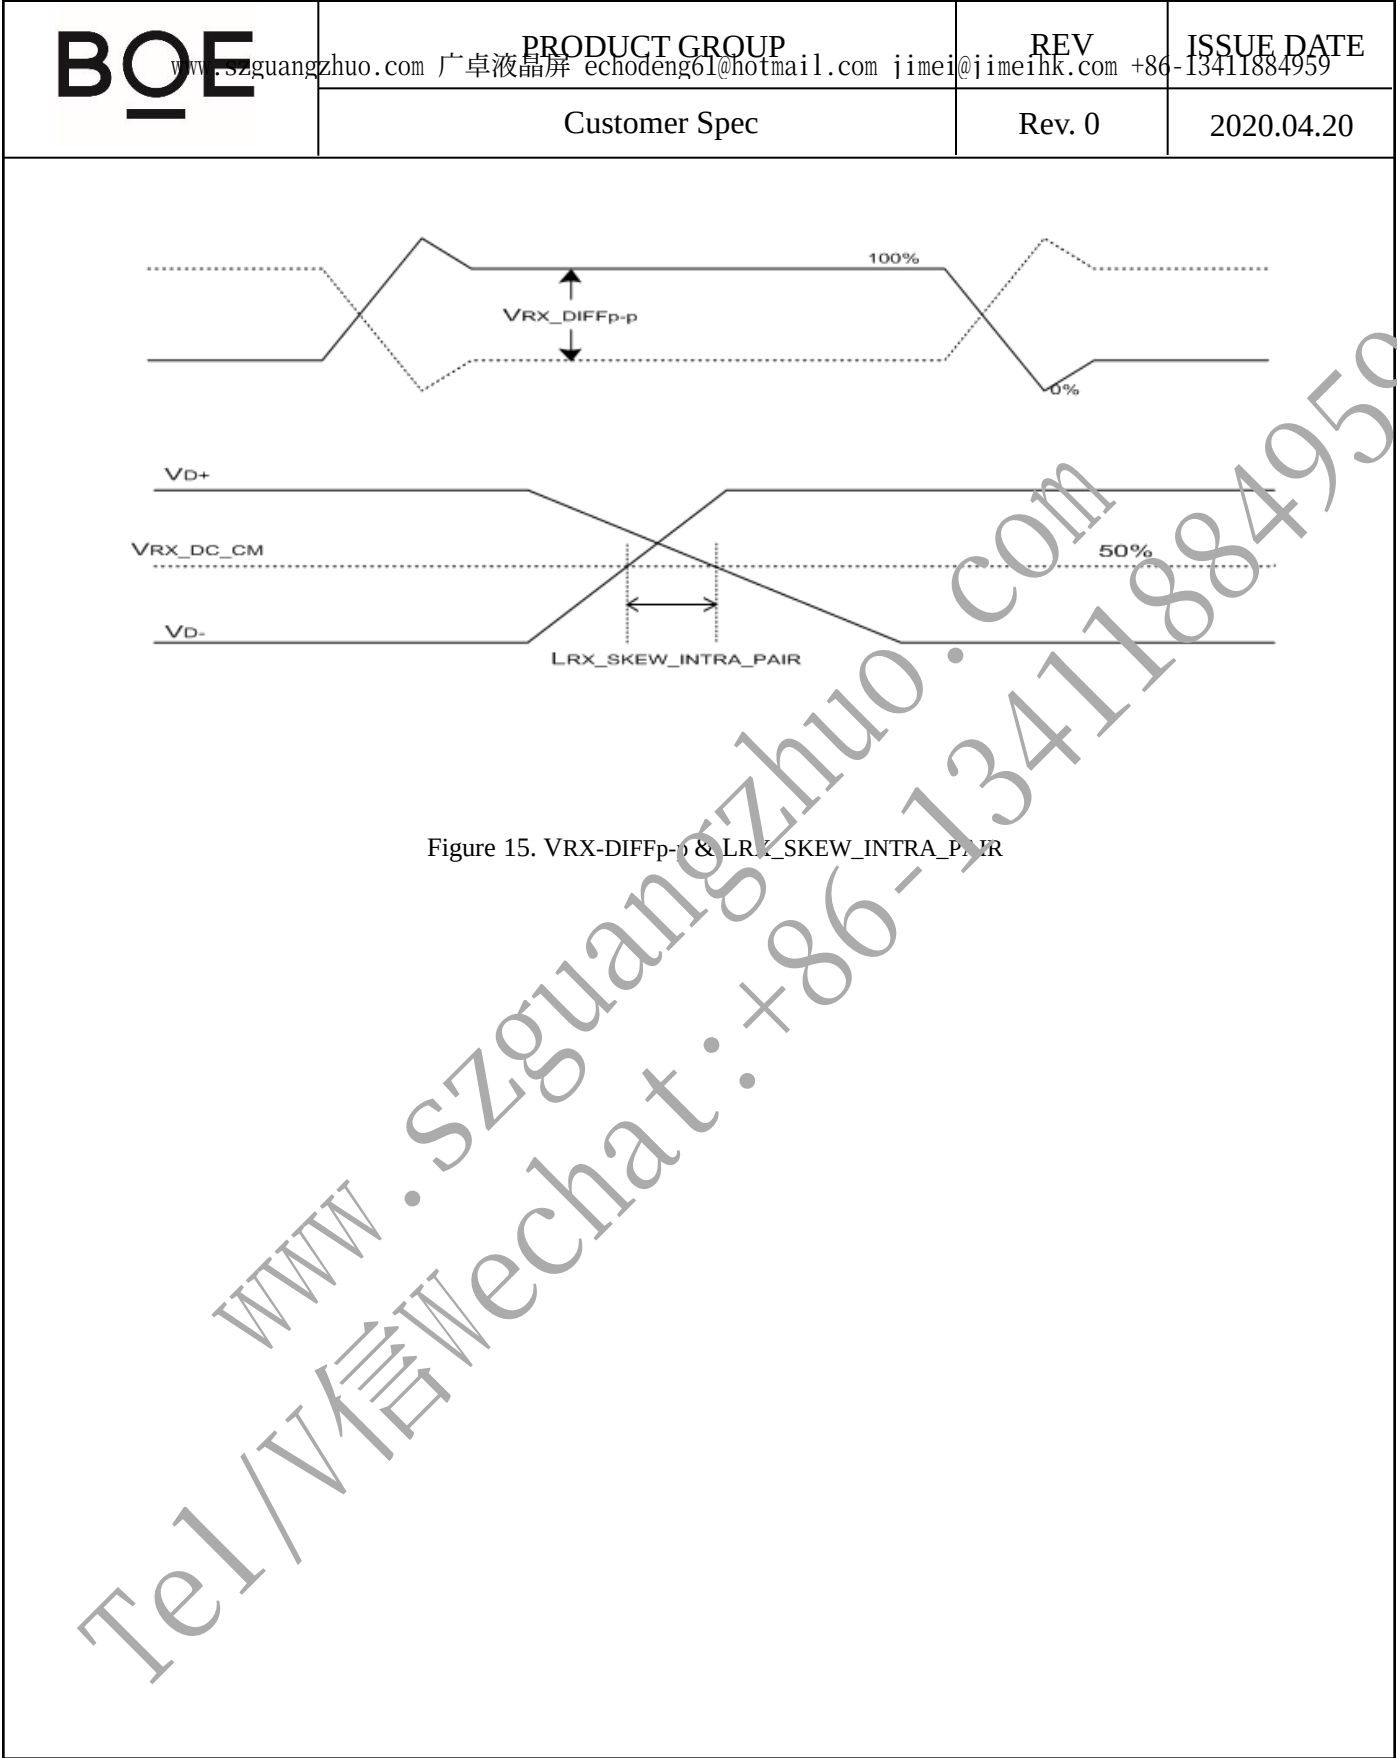

<Table 12. HPD Characteristics>

Item	Symbol	Min	Typ	Max	Unit	Remark
HPD voltage	V _{HPD}	2.25	-	2.75	V	
Hot Plug Detection Threshold		2.0	-	-	V	Source side Detecting
Hot Unplug Detection Threshold		-	-	0.8V	V	
HPD_IRQ Pulse Width	HPD_IRQ	0.5		1	ms	
HPD_TimeOut		2.0			ms	

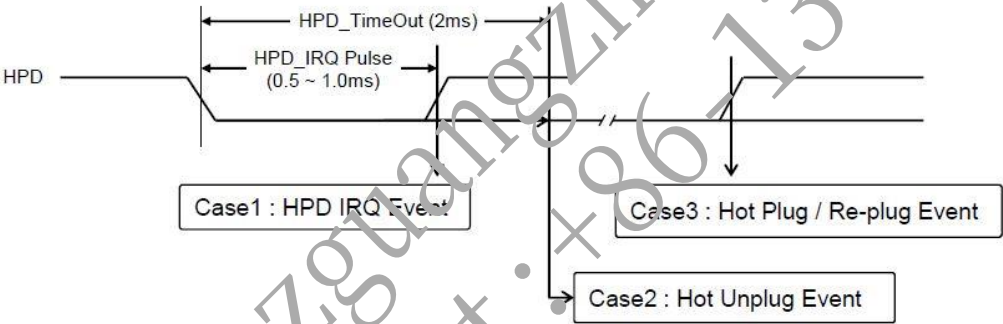


Figure 16. HPD Events

<Table 13. AUX Characteristics>

Item	Symbol	Min	Typ	Max	Unit	Remark
AUX unit interval	UIAUX	0.4	0.5	0.6	Us	
AUX peak-to-peak input differential voltage	VAUX-RX-DIFFp-p	0.25	-	1.36	V	
AUX CH termination DC resistance	RAUX-TERM	80	100	120	Ohm	
AUX DC common mode voltage	VAUX-DC-CM	0		2	V	
AUX turn around common mode voltage	VAUX-TURN-CM	0.05	0.15	0.4	V	
AUX short circuit current limit	IAUX-SHORT		-	90	mA	
AUX AC Coupling Capacitor	CSOURCE-AUX	75	-	200	nf	Source side

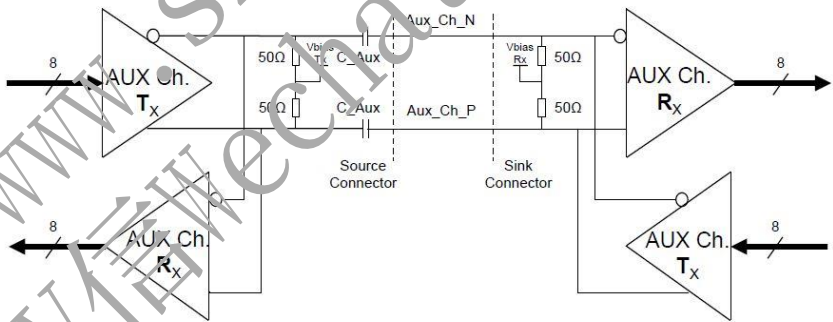


Figure 17. AUX differential pair

7.0 INPUT SIGNALS, BASIC DISPLAY COLORS & GRAY SCALE OF COLORS

<Table 14. Input Signal & Basic Display Colors & Gray Scale of Colors >

	Colors & Gray scale	Data signal																	
		R0	R1	R2	R3	R4	R5	G0	G1	G2	G3	G4	G5	B0	B1	B2	B3	B4	B5
Basic colors	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1
	Green	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
	Light Blue	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1
	Red	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	Purple	1	1	1	1	1	1	0	0	0	0	0	0	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Gray scale of Red	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Darker	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	↑						↑						↑					
	▽	↓						↓						↓					
	Brighter	1	0	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	▽	0	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	Red	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
Gray scale of Green	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0
	Darker	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0
	△	↑						↑						↑					
	▽	↓						↓						↓					
	Brighter	0	0	0	0	0	0	1	0	1	1	1	1	0	0	0	0	0	0
	▽	0	0	0	0	0	0	0	1	1	1	1	1	0	0	0	0	0	0
	Green	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
Gray scale of Blue	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0
	Darker	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0
	△	↑						↑						↑					
	▽	↓						↓						↓					
	Brighter	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	1	1	1
	▽	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1
Gray scale of White & Black	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	1	0	0	0	0	0	1	0	0	0	0	0	1	0	0	0	0	0
	Darker	0	1	0	0	0	0	0	1	0	0	0	0	0	1	0	0	0	0
	△	↑						↑						↑					
	▽	↓						↓						↓					
	Brighter	1	0	1	1	1	1	1	0	1	1	1	1	1	0	1	1	1	1
	▽	0	1	1	1	1	1	0	1	1	1	1	1	0	1	1	1	1	1
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1

8.0 POWER SEQUENCE

To prevent a latch-up or DC operation of the LCD module, the power on/off sequence shall be as shown in below.

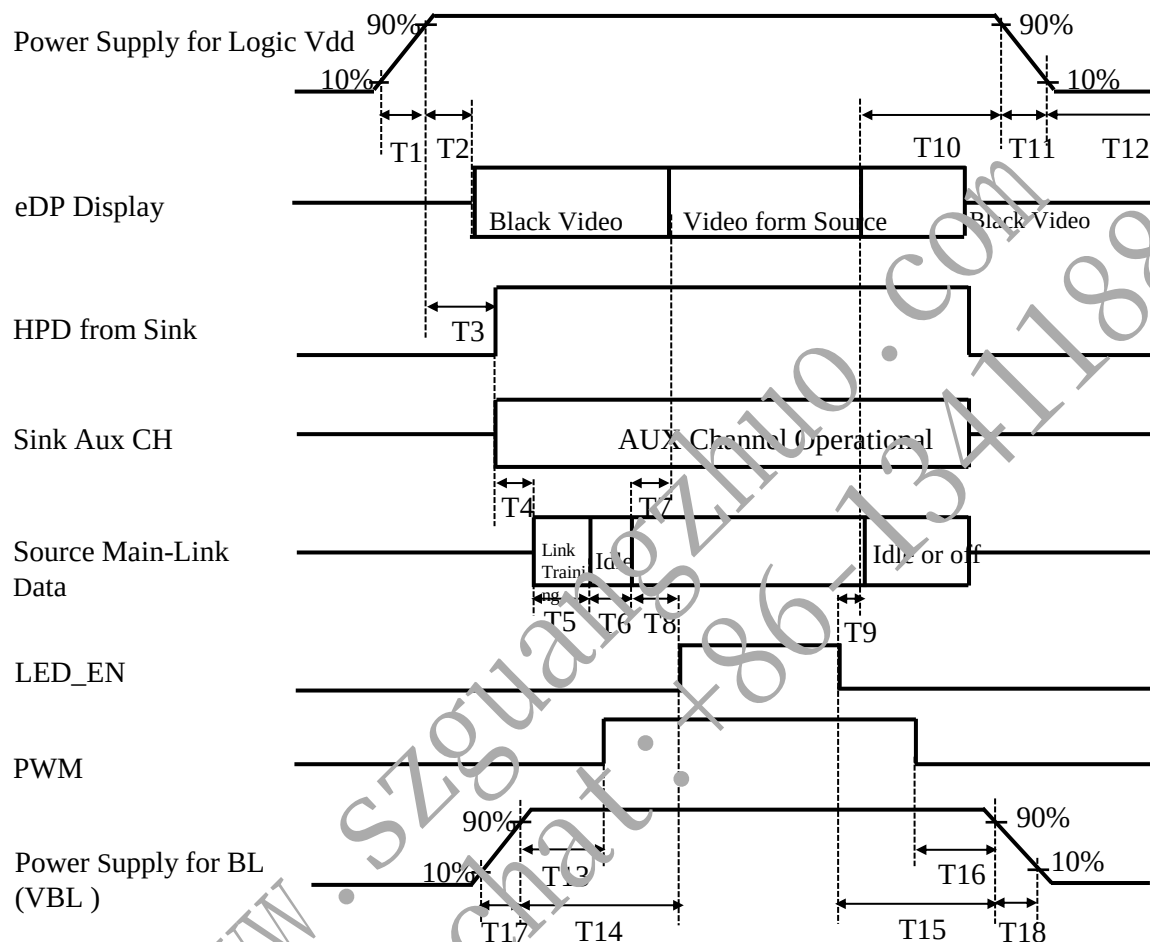


Figure 18. Power Sequence

- $0.5\text{ms} \leq T1 \leq 10\text{ms}$
- $0\text{ms} < T2 \leq 200\text{ms}$
- $0\text{ms} < T3 \leq 200\text{ms}$
- $T3+T4+T5+T6+T8 > 200\text{ms}$
- $0\text{ms} < T7 \leq 50\text{ms}$
- $50\text{ms} < T8$
- $0\text{ms} < T9$
- $0\text{ms} < T10 < 500\text{ms}$
- $0.5\text{ms} \leq T11 \leq 10\text{ms}$
- $500\text{ms} \leq T12$
- $0\text{ms} < T13$
- $0\text{ms} < T14$
- $0\text{ms} < T15$
- $0\text{ms} < T16$
- $0.5\text{ms} \leq T17$
- $0.5\text{ms} \leq T18$

Notes:

1. When the power supply VDD is 0V, keep the level of input signals on the low or keep high impedance.
2. Do not keep the interface signal high impedance when power is on. Back Light must be turn on after power for logic and interface signal are valid.

BOE www.szguangzhuo.com 广卓液晶 echodeng61@hotmail.com jimei@jimeihk.com +86-13411884959	PRODUCT GROUP		REV	ISSUE DATE
	Customer Spec		Rev. 0	2020.04.20

To prevent a latch-up or DC operation of the TLCM module, the power on/off sequence of Touch shall be as shown in below

The diagram illustrates the power-on and power-off sequence for the touch module. It shows the relationship between VTSP (Touch Voltage Supply), T_RST (Touch Reset), BL_EN (Backlight Enable), Touch_EN (Touch Enable), and the I2C interface signals T_SDA, T_SCL, and T_INT. Key timing parameters T1 through T10 are defined for both power-up and power-down sequences.

Figure19 .Touch Power Sequence

● 0ms ≤ T1

● 400us ≤ T2

● 0ms ≤ T3 ≤ 50ms

● 325ms ≤ T4

● 425ms ≤ T5

● 0ms ≤ T6

● 5ms ≤ T7/T8

● 50us ≤ T9

● 12us ≤ T10

Notes:

1. When the power supply VDD is 0V, keep the level of input signals on the low or keep high impedance.

2. Do not keep the interface signal high impedance when power is on. Back Light must be turn on after power for logic and interface signal are valid.

	PRODUCT GROUP www.szguangzhuo.com 广卓液晶屏 echodeng61@hotmail.com jimei@jimeihk.com +86-13411884959	REV	ISSUE DATE
	Customer Spec	Rev. 0	2020.04.20

9.0 Connector Description

Physical interface is described as for the connector on TLCM.
These connectors are capable of accommodating the following signals and will be following components.

9.1 TFT LCD Module

< Table 15. Signal Connector >

Connector Name /Description	For Signal Connector
Manufacturer	IPEX
Type/ Part Number	20455-04CE
Mating Housing/ Part Number	20454-30T

10.0 MECHANICAL CHARACTERISTICS

10.1 Dimensional Requirements

Figure 23 shows mechanical outlines for the model NV140FHM-T0A V8.0.
Other parameters are shown in Table 16.

<Table 16. Dimensional Parameters>

Parameter	Specification	Unit
Active Area	309.312 (H) × 173.988 (V)	mm
Number of pixels	1920 (H) X 1080 (V) (1 pixel = R + G + B dots)	pixels
Pixel pitch	161.1 (H) X 161.1 (V)	um
Pixel arrangement	RGB Vertical stripe	
Display colors	262K(6bit)	
Display mode	Normally Black	
Dimensional outline	315.812 ± 0.3 (H) * 186.068 ± 0.3 (V) (W/O PCB) * 3.0 (Max) 315.812 ± 0.3 (H) * 186.068 ± 0.3 (V) (W/PCB) * 5.0 (Max)	mm
Weight	305 (max)	g

10.2 Mounting

See Figure 24.

10.3 Anti-Glare and Polarizer Hardness

The surface of the LCD has an Anti-Glare coating to minimize reflection and a coating to reduce scratching. The Polarizer hardness is 3H.

10.4 Light Leakage

There shall not be visible light from the back-lighting system around the edges of the screen as seen from a distance 50cm from the screen with an overhead light level of 350lux.

11.0 RELIABILITY TEST

The reliability test items and its conditions are shown in below.

<Table 17. Reliability Test>

No	Test Items	Conditions	Remark
1	High temperature storage test	Ta = 60°C , 60%RH, 240 hrs	
2	Low temperature storage test	Ta = -20°C , 240 hrs	
3	High temperature & high humidity operation test	Ta = 50°C , 80%RH, 240 hrs	
4	High temperature operation test	Ta = 50°C , 60%RH, 240 hrs	
5	Low temperature operation test	Ta = 0°C , 240 hrs	
6	Thermal shock	Ta = -20 °C → 60 °C (0.5 hr), 60% ± 3%RH, 100 cycle	
7	Vibration test (non-operating)	Ta = 25°C , 60%RH, 1.5G, 10~500Hz, Sine X,Y,Z / Sweep rate : 1 hour	Note 1
8	Shock test (non-operating)	Ta = 25°C , 60%RH, 220G, Half Sine Wave 2msec ± X, ± Y, ± Z Once for each direction	Note 1
9	Electro-static discharge test (operating)	Air : 150 pF, 330Ω, ± 15 KV Contact : 150 pF, 330Ω, ± 8 KV Ta = 25°C , 60%RH,	Note 2

Notes :

1. The fixture must be hard enough , so that the module would not be twisted or bent.
2. Self- recovery and restart recovery is allowed. No hardware failures.

	PRODUCT GROUP www.szguangzhuo.com 广卓液晶屏 echodeng61@hotmail.com jimei@jimeihk.com +86-13411884959	REV jimei@jimeihk.com +86-13411884959	ISSUE DATE 13411884959
	Customer Spec	Rev. 0	2020.04.20

12.0 HANDLING & CAUTIONS

- (1) Cautions when taking out the module

 - Pick the pouch only, when taking out module from a shipping package.
- (2) Cautions for handling the module

 - As the electrostatic discharges may break the LCD module, handle the LCD module with care. Peel a protection sheet off from the LCD panel surface as slowly as possible.
 - As the LCD panel and back - light element are made from fragile glass material, impulse and pressure to the LCD module should be avoided.
 - As the surface of the polarizer is very soft and easily scratched, use a soft dry cloth without chemicals for cleaning.
 - Do not pull the interface connector in or out while the LCD module is operating.
 - Put the module display side down on a flat horizontal plane.
 - Handle connectors and cables with care.
- (3) Cautions for the operation

 - When the module is operating, do not lose CLK, ELIAB signals. If any one of these signals is lost, the LCD panel would be damaged.
 - Obey the supply voltage sequence. If wrong sequence is applied, the module would be damaged.
- (4) Cautions for the atmosphere

 - Dew drop atmosphere should be avoided.
 - Do not store and/or operate the LCD module in a high temperature and/or humidity atmosphere. Storage in an electro-conductive polymer packing pouch and under relatively low temperature atmosphere is recommended.
- (5) Cautions for the module characteristics

 - Do not apply fixed pattern data signal to the LCD module at product aging.
 - Applying fixed pattern for a long time may cause image sticking.
- (6) Other cautions

 - Do not disassemble and/or re-assemble LCD module.
 - Do not re-adjust variable resistor or switch etc.
 - When returning the module for repair or etc. Please pack the module not to be broken. We recommend to use the original shipping packages.

SPEC. NUMBER www.szguangzhuo.com 广卓液晶屏 echodeng61@hotmail.com jimei@jimeihk.com +86-13411884959	SPEC. TITLE NV140FHM-T0A V8.0 Product Specification Rev. 0	PAGE 33 OF 67
--	---	------------------

13.0 LABEL

(1) Product Label

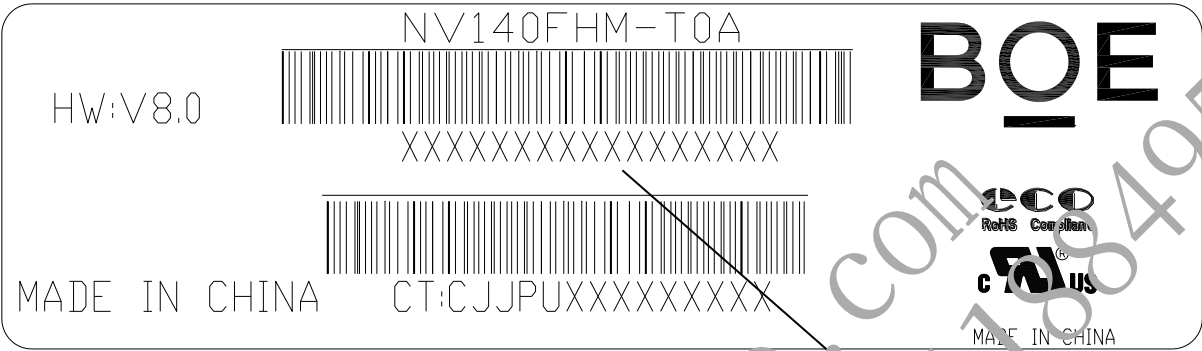


Figure 20. Product Label

Module ID Naming Rule:

<Table 18. Module ID Naming Rule>

Digit Code	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
Code	B	9	A	F	1	7	8	8	D	3	1	0	0	0	0	6	8
Description	Product Name		Product Grade	B8	Year	Month	Model Extension Code (Last 4 Digits of FG CODE)					Serial No. 00001-ZZZZZZ					

(2) High voltage caution label

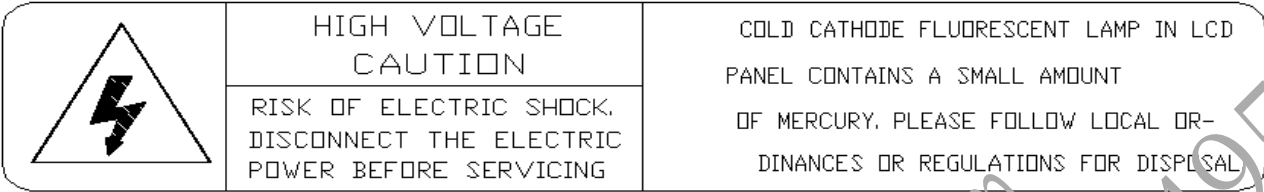


Figure 21. High Voltage Caution Label

(3) Box label

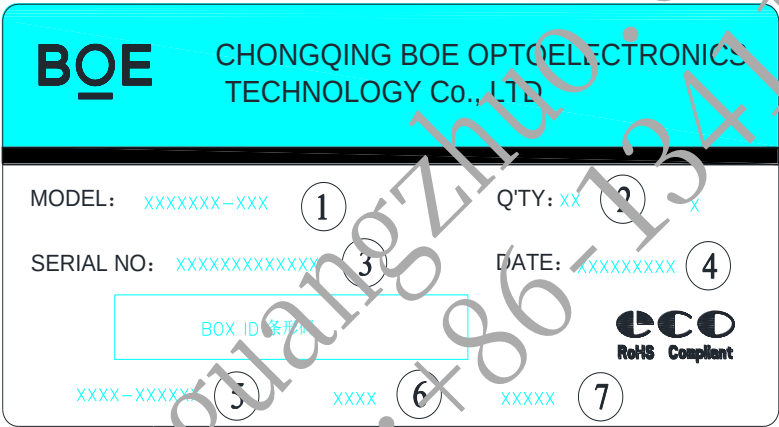


Figure 22. Box Label

Serial number marked part needs to print, show as follows:

1. FG-CODE(Before 12 bit)

2. Product quantity

3. Box ID

4. Date

5. The client section material number(The client)

6. FG-Code After four

7. The supplier code
- Total Size:100×50mm


<Table 19. Box Label Naming Rule >

Digit Code	1	2	3	4	5	6	7	8	9	10	11	12	13
Code	B	9	A	F	1	7	8	N	0	0	3	2	7
Description	Product Name		Product Grade	B8	Year		Month	Revision	BOX Serial Number				

BOE www.szguangzhuo.com 广卓液晶屏 echodeng61@hotmail.com jimei@jimeihk.com +86-13411884959	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	Rev. 0	2020.04.20

14.0 PACKING INFORMATION

14.1 Packing Order

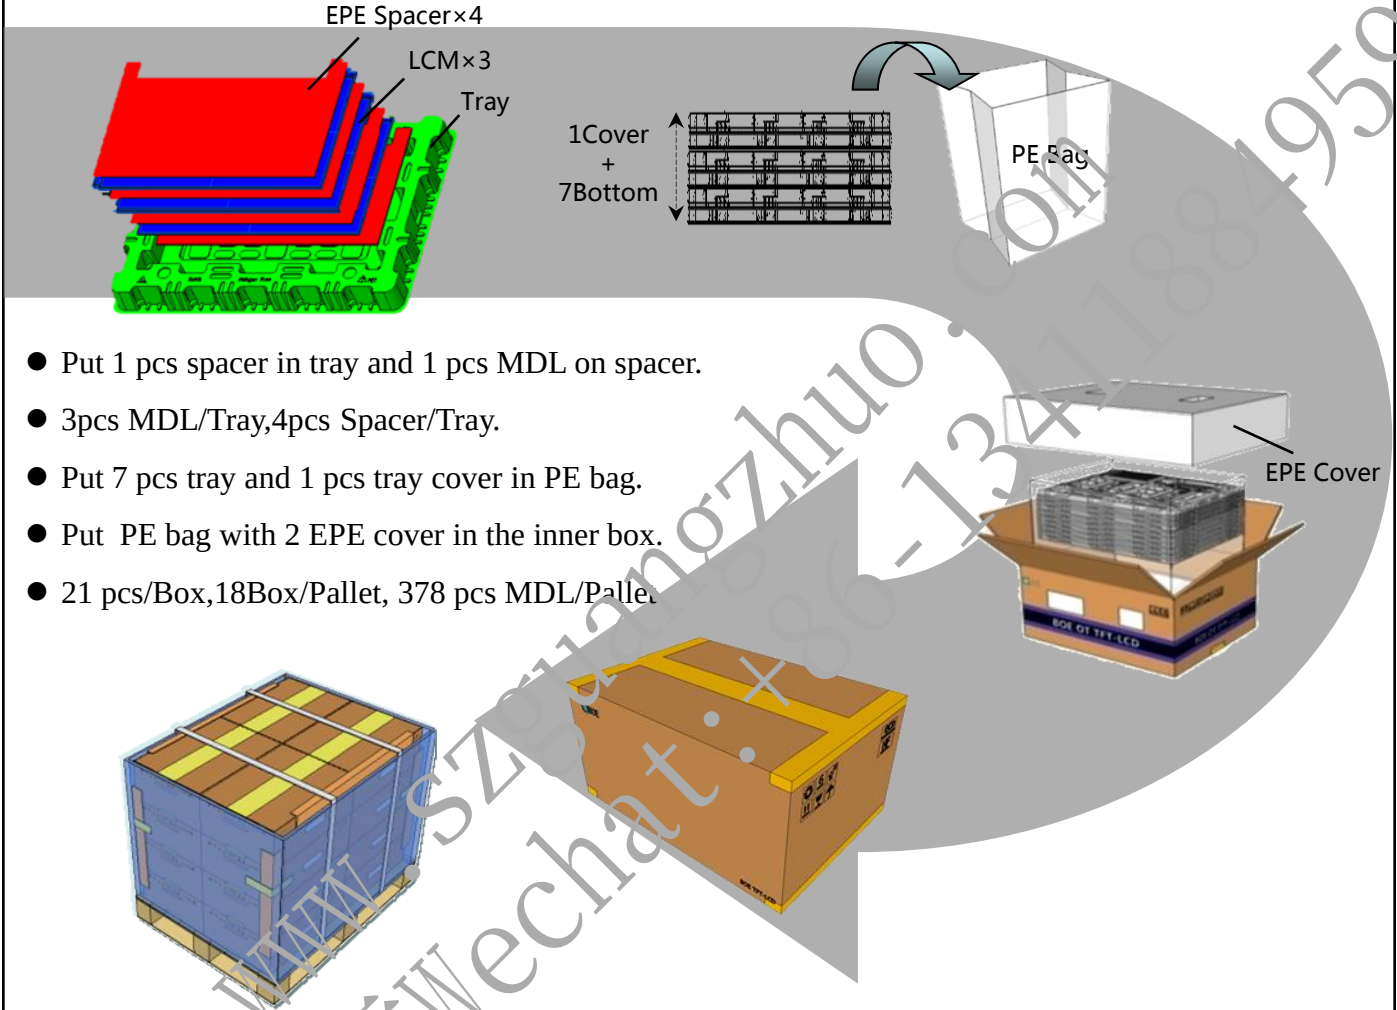

- Put 1 pcs spacer in tray and 1 pcs MDL on spacer.
- 3pcs MDL/Tray,4pcs Spacer/Tray.
- Put 7 pcs tray and 1 pcs tray cover in PE bag.
- Put PE bag with 2 EPE cover in the inner box.
- 21 pcs/Box,18Box/Pallet, 378 pcs MDL/Pallet

Figure 23. Packing Order

14.2 Note

- Box dimension: 480mm*350mm*285mm
- Package quantity in one box: 21pcs
- Total weight: 9.1kg/Box (typ.)

SPEC. NUMBER	SPEC. TITLE	PAGE
www.szguangzhuo.com 广卓液晶屏 echodeng61@hotmail.com jimei@jimeihk.com +86-13411884959	NV140FHM-T0A V8.0 Product Specification Rev. 0	36 Of 67

15.0 MECHANICAL OUTLINE DIMENSION

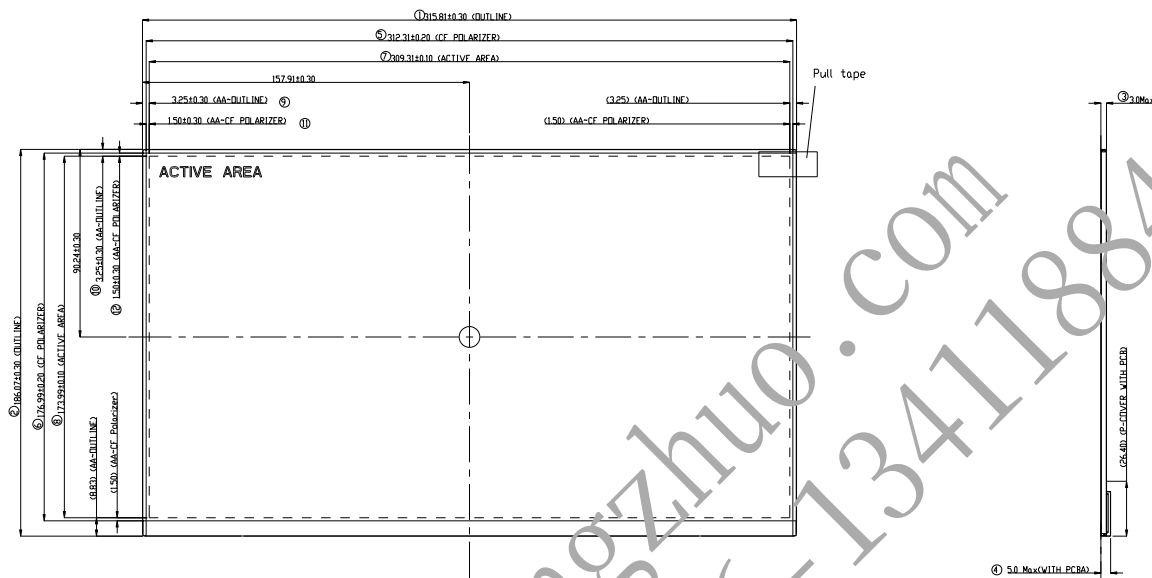


Figure 24. TFT-LCD Module Outline Dimension (Front View)

- Notes:
1. The eDP connector is measurel at PIN 1 and mating line.
 2. Unspecified tolerance refer to ±0.3 mm.
 3. Top polarizer is the highest portion.
 4. Critical dimension: ① ~ ⑩ CPK: ① ~ ④
 5. Measurement method refer to Appendix A
 6. System matching refer to Appendix B
 7. “()”marks the reference dimensions.


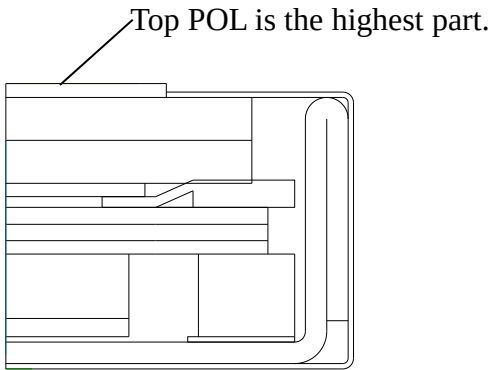


Figure 25. Highest Point Position

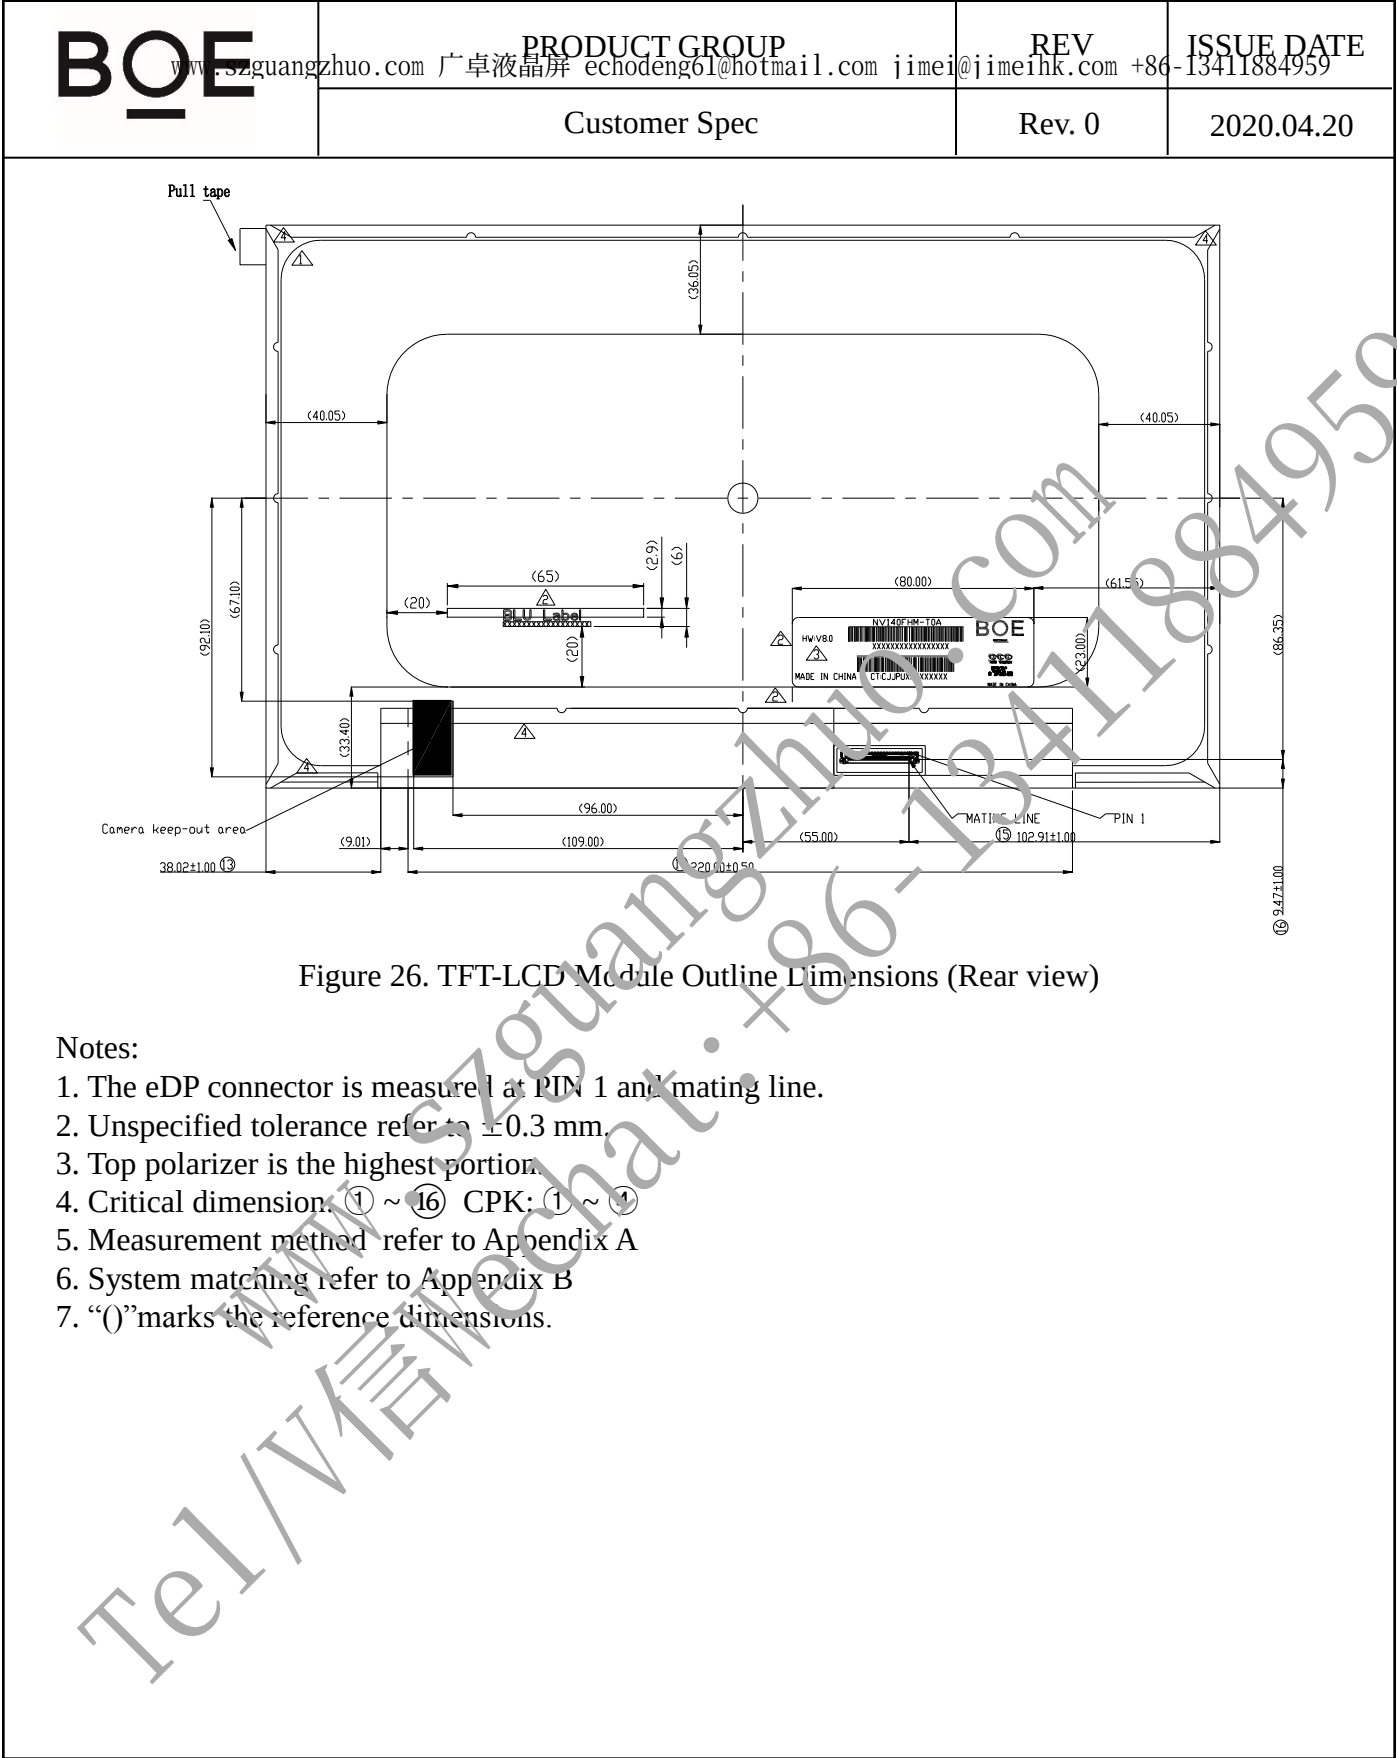

16.0 EDID Table

Address (HEX)	Function	Hex	Dec	crc	Input values.	Notes
00	Header	00	0		0	EDID Header
01		FF	255		255	
02		FF	255		255	
03		FF	255		255	
04		FF	255		255	
05		FF	255		255	
06		FF	255		255	
07		00	0		0	
08	ID Manufacturer Name	09	9		BOE	ID = BOE
09		E5	229			
0A	ID Product Code	BF	191		2239	ID = 2239
0B		08	8			
0C	32-bit serial No.	00	0		0	
0D		00	0		0	
0E		00	0		0	
0F		00	0		0	
10	Week of manufacture	1C	28		28	
11	Year of Manufacture	1D	29		2019	Manufactured in 2019
12	EDID Structure Ver.	01	1		1	EDID Ver 1.0
13	EDID revision #	04	4		4	EDID Rev. 0.4
14	Video input definition	95	149		-	Refer to right table
15	Max H image size	1F	31		31	31 cm (Approx)
16	Max V image size	11	17		17	17.4 cm (Approx)
17	Display Gamma	78	120		2.2	Gamma curve = 2.2
18	Feature support	03	3		-	Refer to right table
19	Red/Green low bits	24	36		-	Red / Green Low Bits
1A	Blue/White low bits	10	16		-	Blue / White Low Bits
1B	Red x high bits	97	151	604	0.590	Red (x) = 10010111 (0.59)
1C	Red y high bits	59	89	358	0.350	Red (y) = 01011001 (0.35)
1D	Green x high bits	34	84	337	0.330	Green (x) = 01010100 (0.33)
1E	Green y high bits	8E	142	568	0.555	Green (y) = 10001110 (0.555)
1F	Blue x high bits	27	39	156	0.153	Blue (x) = 00100111 (0.153)
20	Blue y high bits	1E	30	121	0.119	Blue (y) = 00011110 (0.119)
21	White x high bits	50	80	320	0.313	White (x) = 01010000 (0.313)
22	White y high bits	54	84	336	0.329	White (y) = 01010100 (0.329)
23	Established timing 1	00	0		-	Refer to right table
24	Established timing 2	00	0		-	
25	Established timing 3	00	0		-	

BOE www.szguangzhuo.com 广卓液晶 echodeng61@hotmail.com jimei@jimeihk.com +86-13411884959	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	Rev. 0	2020.04.20

26	Standard timing #1	01	1			Not Used
27		01	1			
28	Standard timing #2	01	1			Not Used
29		01	1			
2A	Standard timing #3	01	1			Not Used
2B		01	1			
2C	Standard timing #4	01	1			Not Used
2D		01	1			
2E	Standard timing #5	01	1			Not Used
2F		01	1			
30	Standard timing #6	01	1			Not Used
31		01	1			
32	Standard timing #7	01	1			Not Used
33		01	1			
34	Standard timing #8	01	1			Not Used
35		01	1			
36	Detailed timing/monitor descriptor #1	C0	192		147.8	147.84MHz Main clock
37		39	57			
38		80	128		1920	Hor Active = 1920
39		18	4		280	Hor Blanking = 280
3A		71	13		-	4 bits of Hor. Active + 4 bits of Hor. Blanking
3B		38	56		1080	Ver Active = 1080
3C		28	40		40	Ver Blanking = 40
3D		40	64		-	4 bits of Ver. Active + 4 bits of Ver. Blanking
3E		09	9		9	Hor Sync Offset = 9
3F		20	32		32	H Sync Pulse Width = 32
40		36	54		3	V sync Offset = 3 line
41		00	0		6	V Sync Pulse width : 6 line
42		35	53		309	Horizontal Image Size = 309.37 mm (Low 8 bits)
43		AE	174		174	Vertical Image Size = 174 mm (Low 8 bits)
44		10	16		-	4 bits of Hor Image Size + 4 bits of Ver Image Size
45		00	0		0	Hor Border (pixels)
46		00	0		0	Vertical Border (Lines)
47		1A	26		-	Refer to right table

SPEC. NUMBER	SPEC. TITLE	PAGE
www.szguangzhuo.com 广卓液晶 echodeng61@hotmail.com jimei@jimeihk.com +86-13411884959	NV140FHM-T0A V8.0 Product Specification Rev. 0	40 OF 67

BOE www.szguangzhuo.com 广卓液晶屏 echodeng61@hotmail.com jimei@jimeihk.com +86-13411884959	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	Rev. 0	2020.04.20

48	Detailed timing/monitor descriptor #2	80	128	98.6	98.56MHz Main clock
49		26	38		
4A		80	128	1920	Hor Active = 1920
4B		18	24	280	Hor Blanking = 280
4C		71	113	-	4 bits of Hor. Active + 4 bits of Hor. Blanking
4D		38	56	1080	Ver Active = 1080
4E		28	40	40	Ver Blanking = 40
4F		40	64	-	4 bits of Ver. Active + 4 bits of Ver. Blanking
50		09	9	9	Hor Sync Offset = 9
51		20	32	32	H Sync Pulse Width = 32
52		36	54	3	V sync Offset = 3 line
53		00	0	6	V Sync Pulse width = 6 line
54		35	53	309	Horizontal Image Size = 309.37 mm (Low 8 bits)
55		AE	174	174	Vertical Image Size = 174 mm (Low 8 bits)
56		10	16	-	4 bits of Hor Image Size + 4 bits of Ver Image Size
57		00	0	0	Hor Border (pixels)
58		00	0	0	Vertical Border (Lines)
59		1A	26	-	Refer to right above table
5A	Detailed timing/monitor descriptor #3	00	0		Nvidia nvDPS (Refer the tab of nvDPS) Lowest refresh rate that does not cause any visual/optical side effect
5B		00	0		
5C		00	0		
5D		00	0		
5E		00	0		
5F		00	0		
60		00	0		
61		00	0		
62		00	0		
63		00	0		
64		00	0		
65		00	0		
66		00	0		
67		00	0		
68		00	0		
69		00	0		
6A		00	0		
6B		00	0		

SPEC. NUMBER	SPEC. TITLE	PAGE
www.szguangzhuo.com 广卓液晶屏 echodeng61@hotmail.com jimei@jimeihk.com +86-13411884959	NV140FHM-T0A V8.0 Product Specification Rev. 0	41 OF 67

6C	Detailed timing/monitor descriptor #4	00	0		Detailed Timing Description #4
6D		00	0		Flag
6E		00	0		Reserved
6F		02	2		For Brightness Table and Power consumption
70		00	0		Flag
71		0B	11	-	PWM % [7:0] @ Step 0
72		40	64	-	PWM % [7:0] @ Step 5
73		FF	255	-	PWM % [7:0] @ step 10
74		0A	10	-	Nits [7:0] @ Step 0
75		3C	60	-	Nits [7:0] @ Step 5
76		7D	125	-	Nits [7:0] @ Step 10
77		16	22	-	Panel Electronics Power @32x32 Chess Pattern = 900mW
78		11	17	-	Backlight Power @60 nits = 703.905892350941mW
79		22	34	-	Backlight Power @Step 10 = 2770mW
7A		7D	125		Nits @ 100% PWM Duty = 150nit
7B		00	0		Format : terminate with ASCII code 0Ah and pad field with ASCII code 20h
7C		00	0		
7D		00	0		
7E		00	0	1	0 : 1个EDID; N-1: N个EDID
7F	Checksum	36	54	54	-

	PRODUCT GROUP www.szguangzhuo.com 广卓液晶屏 echodeng61@hotmail.com jimei@jimeihk.com +86-13411884959	REV jimeihk.com +86-13411884959	ISSUE DATE 13411884959
	Customer Spec	Rev. 0	2020.04.20

17.0 GENERAL PRECAUTIONS

17.1 HANDLING

- (1) When the module is assembled, It should be attached to the system firmly using every mounting holes. Be careful not to twist or bend the modules.
- (2) Refrain from strong mechanical shock or any force to the module. Otherwise, it may cause improper operation or damage to the module.
- (3) Note that polarizers are very fragile and could be easily damaged. Do not press or scratch the surface harder than 1 HB pencil lead.
- (4) Wipe off water droplets or oil immediately. If you leave the droplets for a long time, Staining and discoloration may occur.
- (5) If the surface of the polarizer is dirty, clean it using some absorbent cotton or soft cloth.
- (6) The desirable cleaners are water, IPA (Isopropyl Alcohol) or Hexane. Do not use Ketone type materials(ex. Acetone), Ethyl alcohol, Toluene, Ethyl acid or Methyl chloride. It might permanently damage to the polarizer due to chemical reaction.
- (7) If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth .In case of contact with hands, legs or clothes, it must be washed away thoroughly with soap.
- (8) Protect the module from static , it may cause damage to the module.
- (9) Use fingerstalls with soft gloves to keep display clean during the incoming inspection and assembly process.
- (10) Do not disassemble the module.
- (11) Do not pull or fold the LED FPC.
- (12) Do not touch any component which is located on the back side.
- (13) Protection film for polarizer on the module shall be slowly peeled off just before use so that the electrostatic charge can be minimized.
- (14) Pins of connector shall not be touched directly with bare hands.

17.2 STORAGE

- (1) Do not leave the module in high temperature, and high humidity for a long time. It is highly recommended to store the module with temperature from 0 to 35℃ and relative humidity of less than 70%.
- (2) Do not store the TFT-LCD module in direct sunlight.
- (3) The module shall be stored in a dark place. It is prohibited to apply sunlight or fluorescent light during the store.

SPEC. NUMBER www.szguangzhuo.com 广卓液晶屏 echodeng61@hotmail.com jimei@jimeihk.com +86-13411884959	SPEC. TITLE NV140FHM-T0A V8.0 Product Specification Rev. 0	PAGE 43 OF 67
--	---	------------------

	PRODUCT GROUP www.szguangzhuo.com 广卓液晶屏 echodeng61@hotmail.com jimei@jimeihk.com +86-13411884959	REV jimei@jimeihk.com +86-13411884959	ISSUE DATE +86-13411884959
	Customer Spec	Rev. 0	2020.04.20

17.3 OPERATION

- (1) Do not connect, disconnect the module in the “ Power On” condition.
- (2) Power supply should always be turned on/off by following item 8.0 “ Power on/off sequence “.
- (3) Module has high frequency circuits. Sufficient suppression to the electromagnetic interference shall be done by system manufacturers. Grounding and shielding methods may be important to minimize the interference.
- (4) The standard limited warranty is only applicable when the module is used for general notebook applications. If used for purposes other than as specified, BOE is not to be held reliable for the defective operations. It is strongly recommended to contact BOE to find out fitness for a particular purpose.

17.4 OTHERS

- (1) Avoid condensation of water. It may result in improper operation or disconnection of electrode.
- (2) Do not exceed the absolute maximum rating value. (the supply voltage variation, input voltage variation, Variation in part contents and environmental temperature, so on) Otherwise the module may be damaged.
- (3) If the module displays the same pattern continuously for a long period of time, it can be the situation when The “ image sticks” to the screen.
- (4) This module has its circuitry PCB’s on the rear or bottom side and should be handled carefully to avoid being stressed.

SPEC. NUMBER www.szguangzhuo.com 广卓液晶屏 echodeng61@hotmail.com jimei@jimeihk.com +86-13411884959	SPEC. TITLE NV140FHM-T0A V8.0 Product Specification Rev. 0	PAGE 44 OF 67
--	---	------------------

	PRODUCT GROUP www.szguangzhuo.com 广卓液晶屏 echodeng61@hotmail.com jimei@jimeihk.com +86-13411884959	REV www.szguangzhuo.com 广卓液晶屏 echodeng61@hotmail.com jimei@jimeihk.com +86-13411884959	ISSUE DATE www.szguangzhuo.com 广卓液晶屏 echodeng61@hotmail.com jimei@jimeihk.com +86-13411884959
	Customer Spec	Rev. 0	2020.04.20

Appendix A

The Measurement Methods for the Dimensions of Module

Caliper:

- a. Length of Outline
- b. Width of Outline (Without/With PCB)
- c. Thickness of Outline (Without/ With PCB)

Coordinate Measuring Machine:

- CF Polarizer Size
- Active Area Size
- Active Area to Outline (Without Tape Wrinkle or Bulged)
- Active Area to CF Polarizer
- The Distance of Bracket Holes
- P-Cover to Outline (Without Tape Wrinkle or Bulged)
- Length of P-Cover
- Connector Pin 1 to Outline (Without Tape Wrinkle or Bulged)

Height Gauge: The Different Height of Root and Top on the Bracket
(Need to Calculate From Bracket Angle Spec.)

Feeler Gauge: The Warpage Spec. of Module


Notes:

Except the Critical Dimensions as Above, Other Dimensions are Measured by Coordinate Measuring Machine If Necessary.

SPEC. NUMBER	SPEC. TITLE	PAGE
www.szguangzhuo.com 广卓液晶屏 echodeng61@hotmail.com jimei@jimeihk.com +86-13411884959	NV140FHM-T0A V8.0 Product Specification Rev. 0	45 OF 67

Appendix B

LCM to A-Cover / sponges z-gap

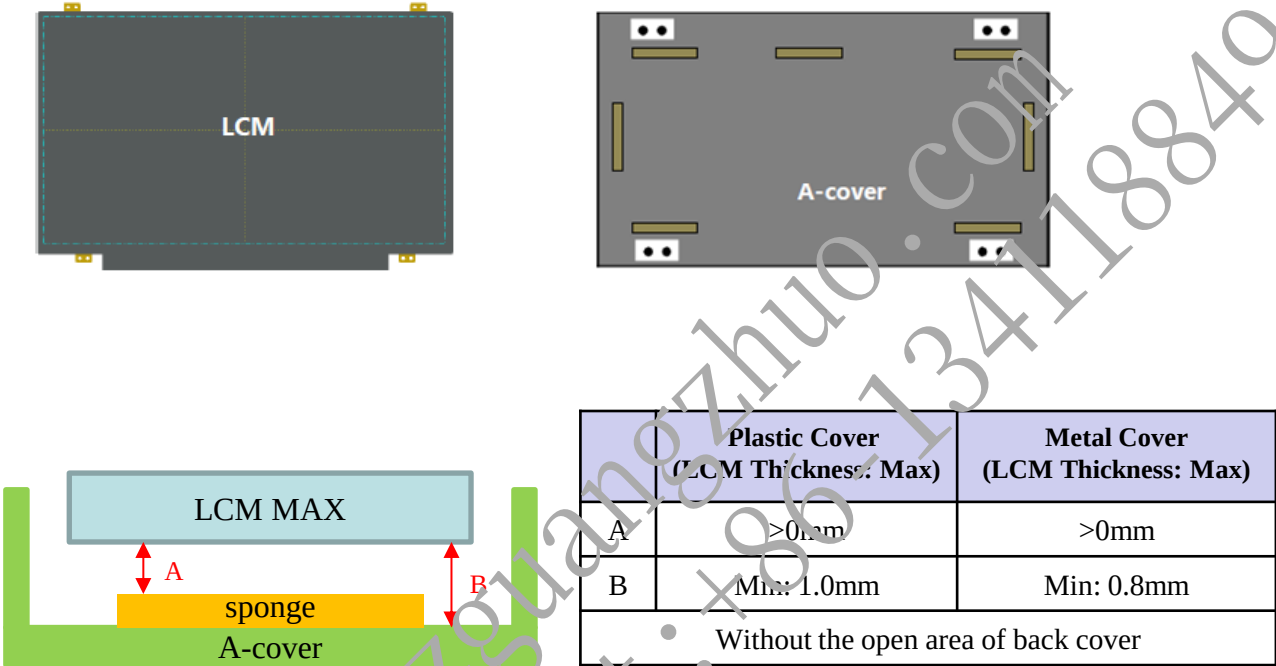


Purpose	The reflector area is very sensitive, we suggest that design enough z-gap to decrease the risk of water ripple, white spot and other abnormal display
---------	---

BOE www.szguangzhuo.com 广卓液晶 echodeng61@hotmail.com jimei@jimeihk.com +86-13411884959	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	Rev. 0	2020.04.20

Appendix B

LCM to A-Cover / sponges z-gap

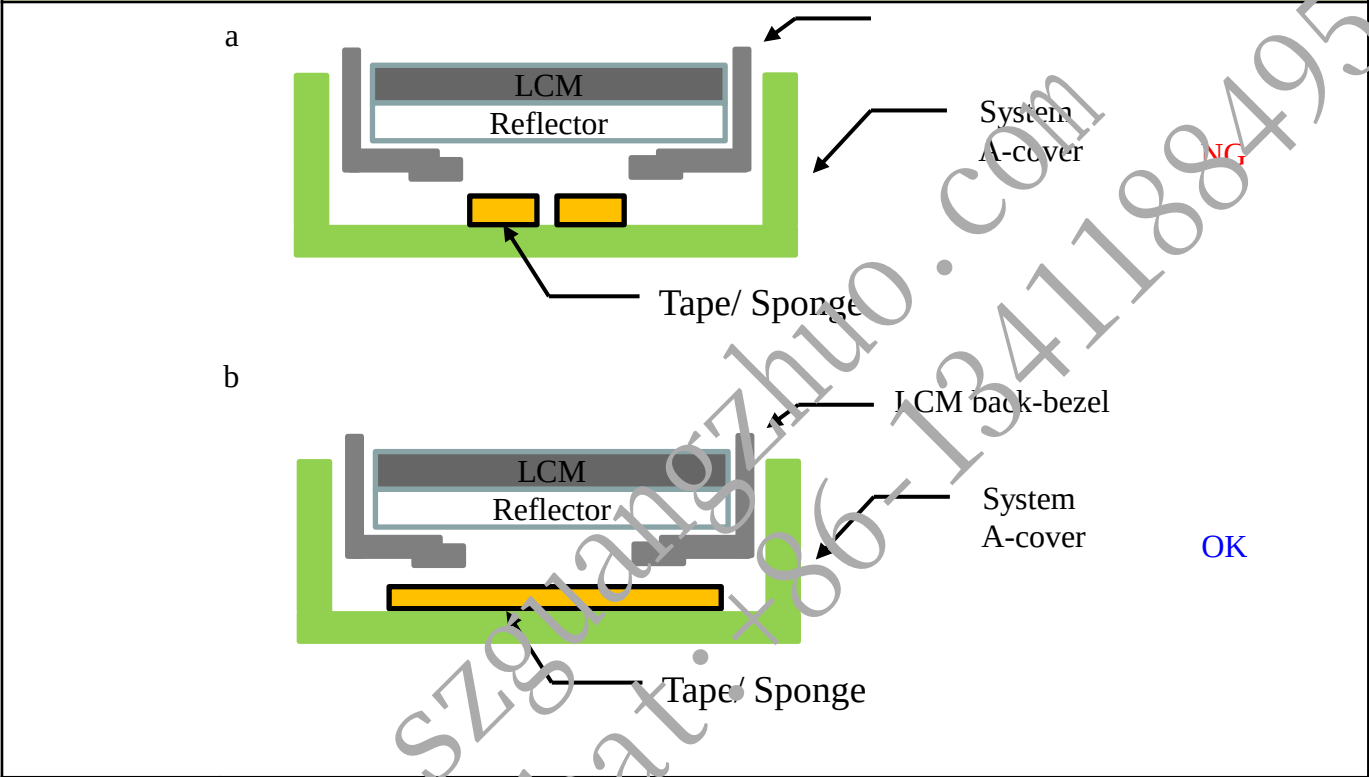


Purpose	If attach sponges or rubbers which correspond to white reflector area, it may cause white spot, pooling or other relate issues. We suggest that attach wide range sponges / rubbers which can cover the LCM back-bezel opening
---------	---

SPEC. NUMBER	SPEC. TITLE	PAGE
www.szguangzhuo.com 广卓液晶 echodeng61@hotmail.com jimei@jimeihk.com +86-13411884959	NV140FHM-T0A V8.0 Product Specification Rev. 0	47 Of 67

Appendix B

LCM to side wall / protrusions

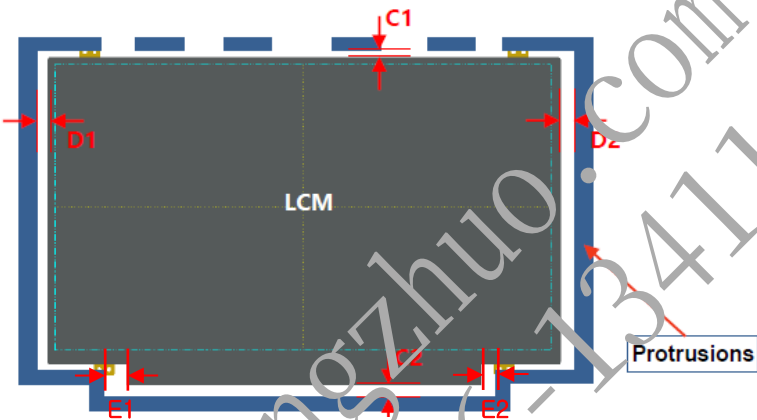

	Normal border	Narrow border
D1/D2	Min: 0.45mm	Min: 0.35mm
C1	Min: 0.50mm	
C2	Min: 0.50mm	
E1/E2	Min: 0.55mm	

Purpose	We suggest that design enough gap around LCM to prevent shock test failure, or interference, cell crack, abnormal display...etc. in the reliability test
---------	--

Appendix B

LCM to B-cover z-gap




B-cover Tape	Gap
Without	0.15 ~ 0.25mm
With	0.15 ~ 0.20mm

Purpose	Too less z-gap between system B-cover and LCM top pol has high risk to cause cell crack, pooling, light leakage and other issues
---------	--

BOE www.szguangzhuo.com 广卓液晶 echodeng61@hotmail.com jimei@jimeihk.com +86-13411884959	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	Rev. 0	2020.04.20

Appendix B

B-cover tape to top pol edge

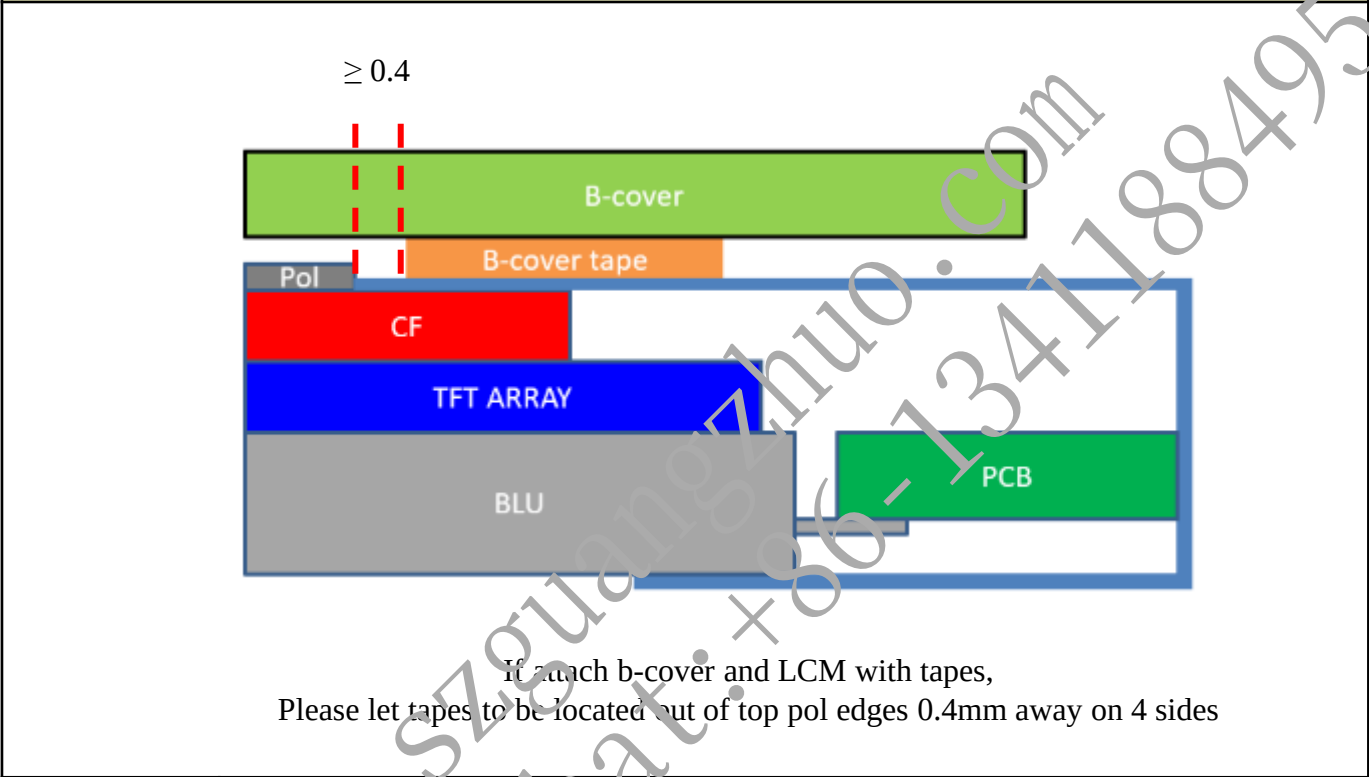


Purpose	To avoid the B-cover tape override top pol and cause pooling or light leakage issue
---------	---

SPEC. NUMBER	SPEC. TITLE	PAGE
www.szguangzhuo.com 广卓液晶 echodeng61@hotmail.com jimei@jimeihk.com +86-13411884959	NV140FHM-T0A V8.0 Product Specification Rev. 0	50 OF 67

BOE www.szguangzhuo.com 广卓液晶屏 echodeng61@hotmail.com jimei@jimeihk.com +86-13411884959	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	Rev. 0	2020.04.20

Appendix B

Antenna Cable & Webcam wire

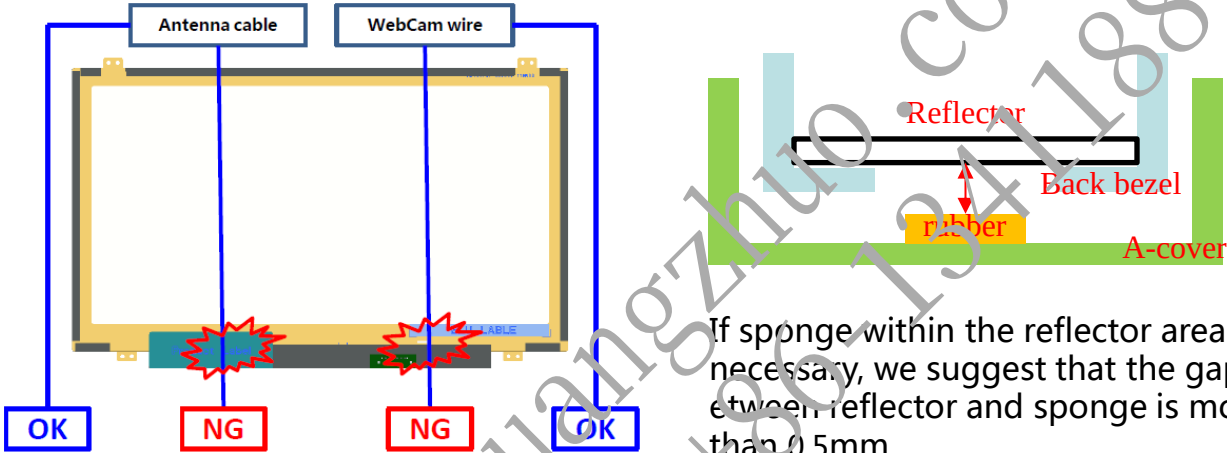


Purpose	1. We suggest that do not set Antenna or WebCam cable / wire go behind LCM to avoid backpack test ,hinge test ,twist test or pogo test with abnormal display 2. If the cable / wire is necessary to go behind LCM, please make a groove with rounds or chamfers to protect the cable / wire, or attach with higher sponge / rubbers adjacent to the cable / wire route 3. Suggest that attach the cable / wire with tapes to A-cover 4. Do not attach anything with LCM reflector area. If attach cable / wire with LCM reflector area, it may cause pooling, white spot, light leakage and other related issues
---------	---

SPEC. NUMBER	SPEC. TITLE	PAGE
www.szguangzhuo.com 广卓液晶屏 echodeng61@hotmail.com jimei@jimeihk.com +86-13411884959	NV140FHM-T0A V8.0 Product Specification Rev. 0	51 Of 67

BOE www.szguangzhuo.com 广卓液晶 echodeng61@hotmail.com jimei@jimeihk.com +86-13411884959	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	Rev. 0	2020.04.20

Appendix B

LCM paste area

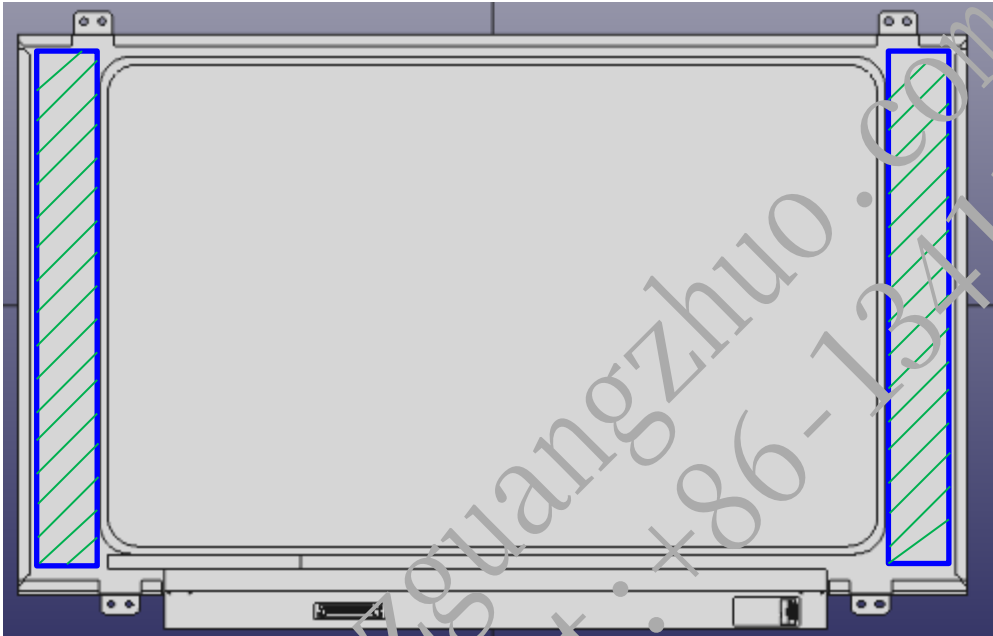


Attachment area

Purpose	If use the stretch remove tapes to fix LCM with A-cover, please set the stretch remove tapes correspond to the LCM back-bezel and do not let the tapes override the back-bezel's level step of opening
---------	--

SPEC. NUMBER	SPEC. TITLE	PAGE
www.szguangzhuo.com 广卓液晶 echodeng61@hotmail.com jimei@jimeihk.com +86-13411884959	NV140FHM-T0A V8.0 Product Specification Rev. 0	52 OF 67

Appendix B

LCM pressable area

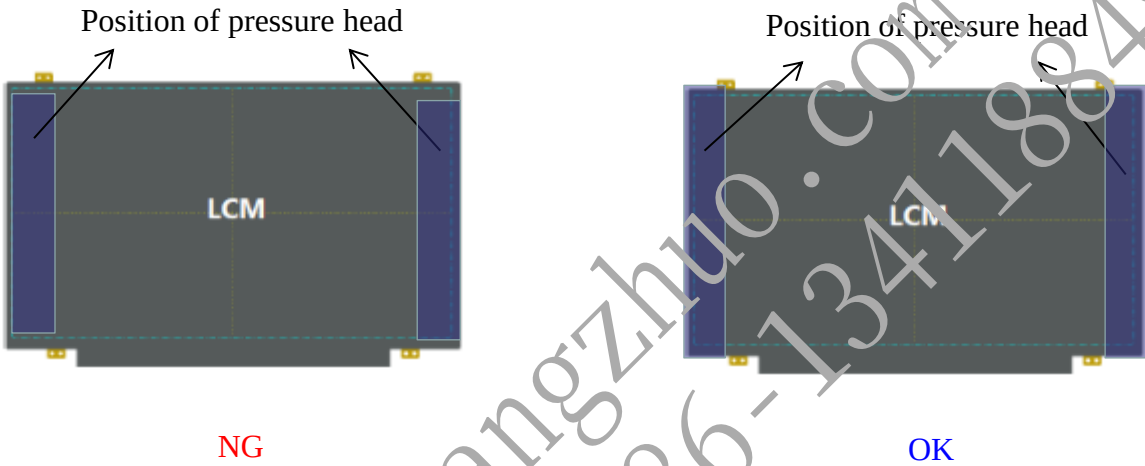


Purpose	1. LCM is fixed on A-cover by double-sided tap which can stick LCM after using the press jig stress LCM during assembling. 2. To avoid panel broken the design of pressure head of press jig can not only pin on cell panel. The pressure head needs to pin on the LCM frame, which the LCM frame can share the pressure of the pressing head.
---------	--

BOE www.szguangzhuo.com 广卓液晶显示屏 echodeng61@hotmail.com jimei@jimeihk.com +86-13411884959	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	Rev. 0	2020.04.20

Appendix B

Wire setting

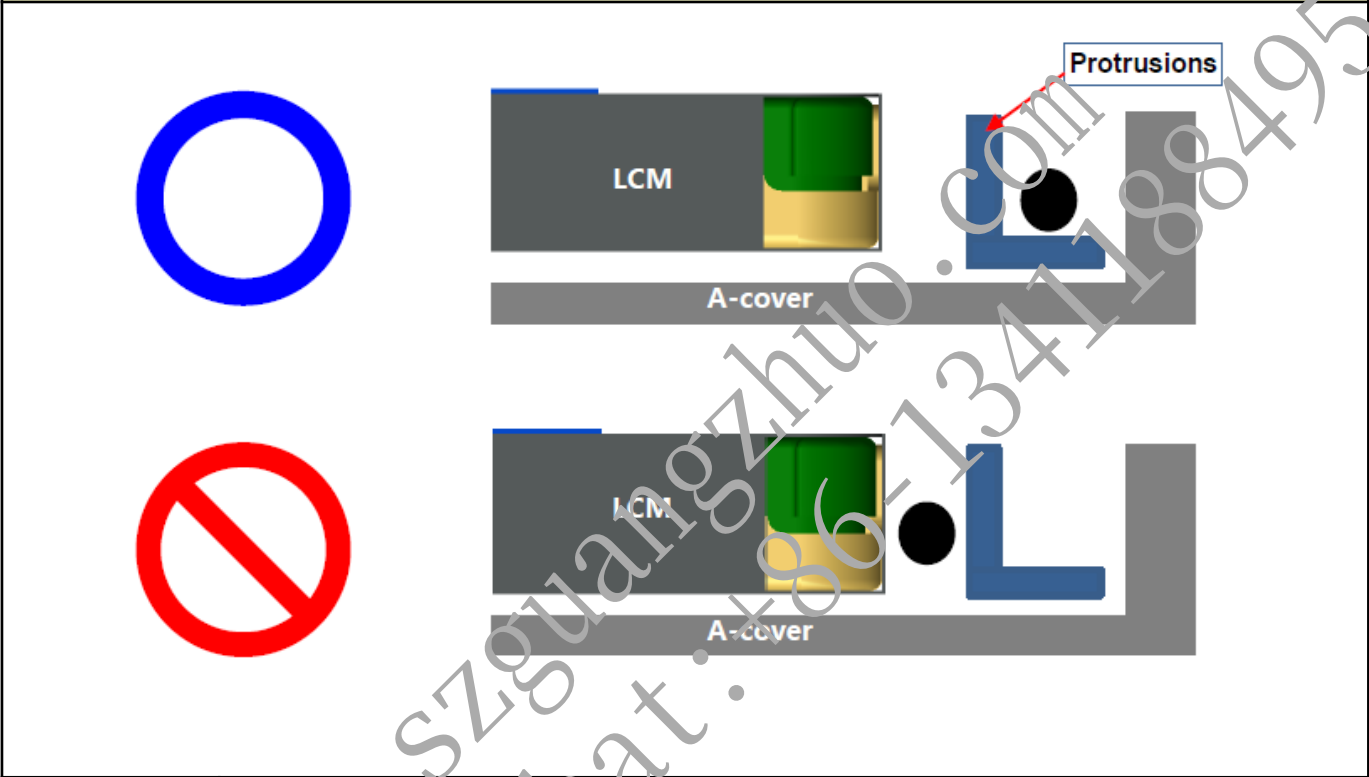


Purpose	Wire should be placed between Protrusions and A-cover. If place the wire between LCM and Protrusions, it may interfere with LCM when assembling B-covers, or even cause LCM breakage in reliability test.
---------	---

SPEC. NUMBER	SPEC. TITLE	PAGE
www.szguangzhuo.com 广卓液晶显示屏 echodeng61@hotmail.com jimei@jimeihk.com +86-13411884959	NV140FHM-T0A V8.0 Product Specification Rev. 0	54 Of 67

BOE www.szguangzhuo.com 广卓液晶屏 echodeng61@hotmail.com jimei@jimeihk.com +86-13411884959	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	Rev. 0	2020.04.20

Appendix B

A-cover strength

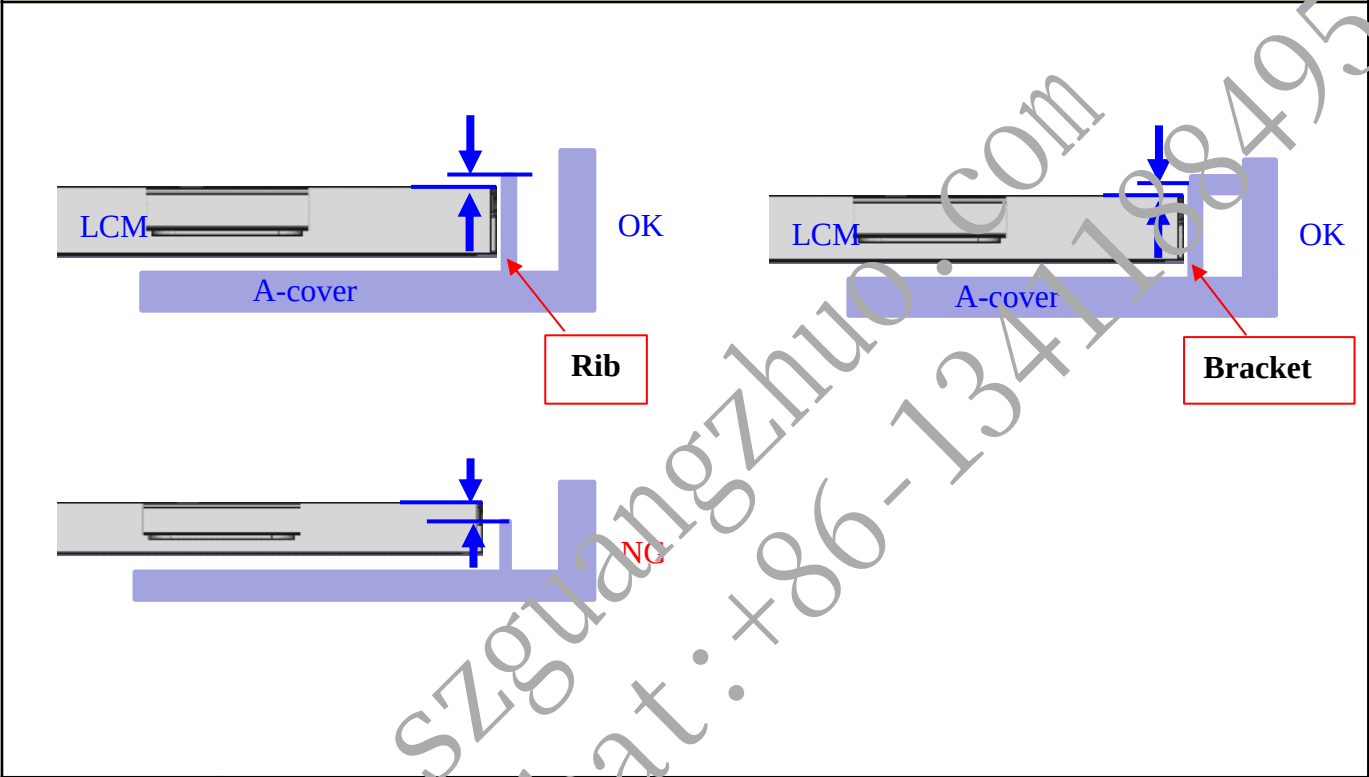


Purpose	1. It is recommended that Rib height is higher than LCM, in order to avoiding press on LCM edge panels. 2. As for LCM is more stronger than Rib, the L Bracket is be recommended.
---------	--

SPEC. NUMBER	SPEC. TITLE	PAGE
www.szguangzhuo.com 广卓液晶屏 echodeng61@hotmail.com jimei@jimeihk.com +86-13411884959	NV140FHM-T0A V8.0 Product Specification Rev. 0	55 OF 67

BOE www.szguangzhuo.com 广卓液晶 echodeng61@hotmail.com jimei@jimeihk.com +86-13411884959	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	Rev. 0	2020.04.20

Appendix B

System A-cover Inner Surface

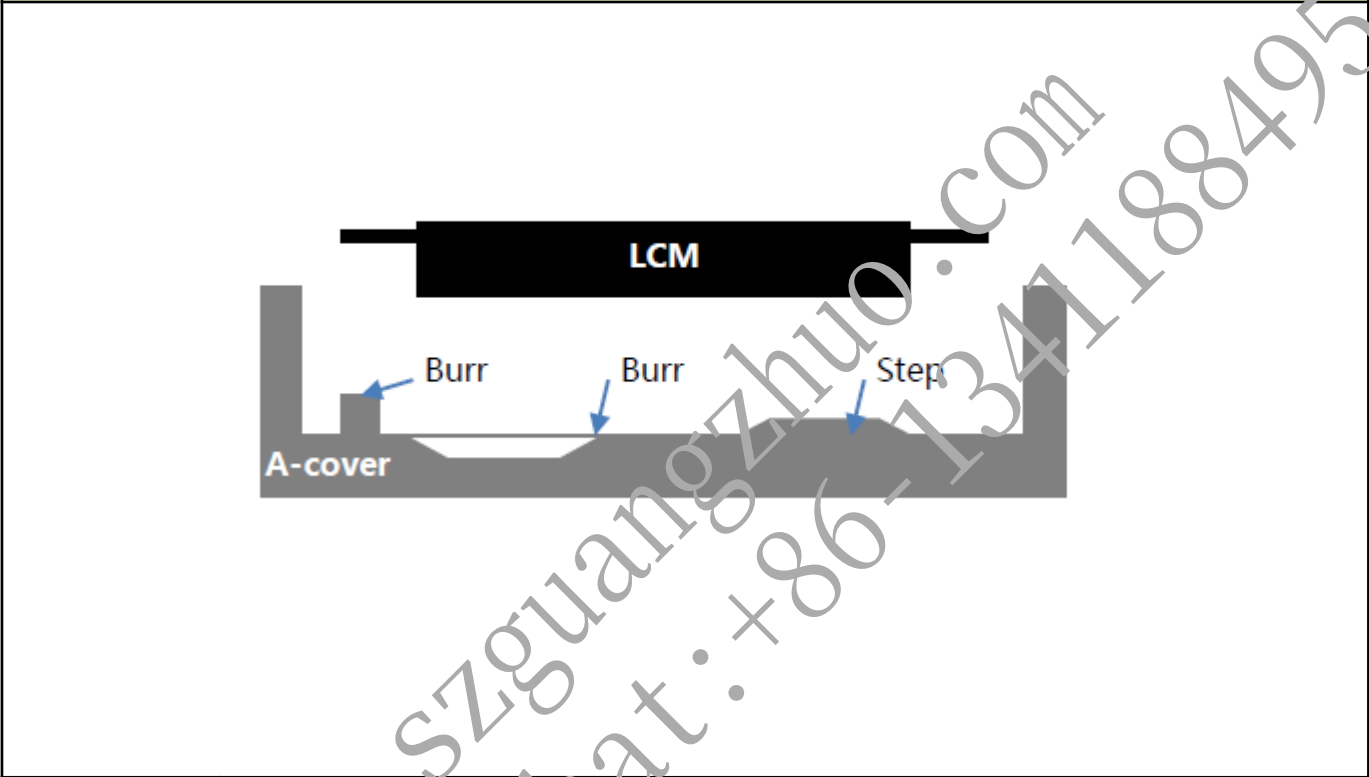



Purpose	There should not exist any burr, segment gap or protrusions beside Logo, which would cause White Spot or Glass Broken by stress concentration.
---------	--

SPEC. NUMBER	SPEC. TITLE	PAGE
www.szguangzhuo.com 广卓液晶 echodeng61@hotmail.com jimei@jimeihk.com +86-13411884959	NV140FHM-T0A V8.0 Product Specification Rev. 0	56 Of 67

BOE www.szguangzhuo.com 广卓液晶屏 echodeng61@hotmail.com jimei@jimeihk.com +86-13411884959	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	Rev. 0	2020.04.20

Appendix B

Keyboard area & Mouse pad

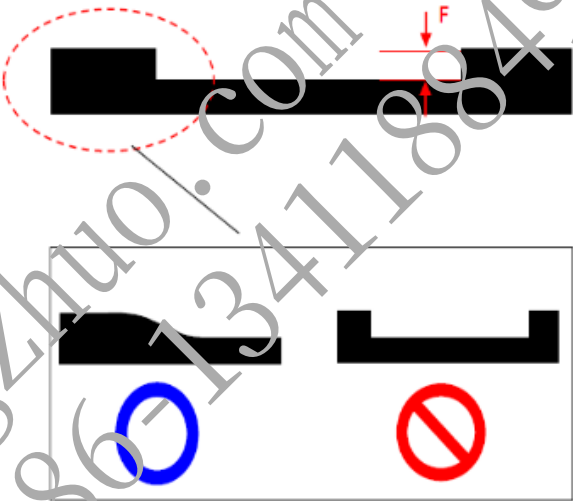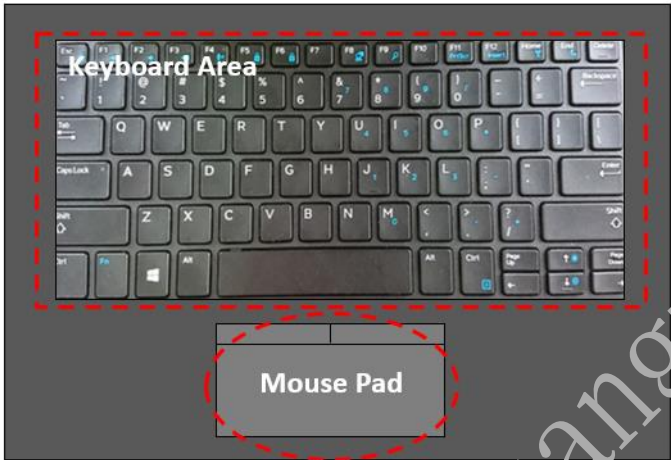

F: max 0.3mm


Purpose	In order to avoiding LCM fragments in reliability test, the step surface of Keyboard and Mouse pad transmits smoothly, and should not be right-angle. For example, when Poga testing, if the broken hole is done in this location, it is easy to produce fragments.
---------	---

SPEC. NUMBER	SPEC. TITLE	PAGE
www.szguangzhuo.com 广卓液晶屏 echodeng61@hotmail.com jimei@jimeihk.com +86-13411884959	NV140FHM-T0A V8.0 Product Specification Rev. 0	57 Of 67

BOE www.szguangzhuo.com 广卓液晶屏 echodeng61@hotmail.com jimei@jimeihk.com +86-13411884959	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	Rev. 0	2020.04.20

Appendix B

System cover reliability

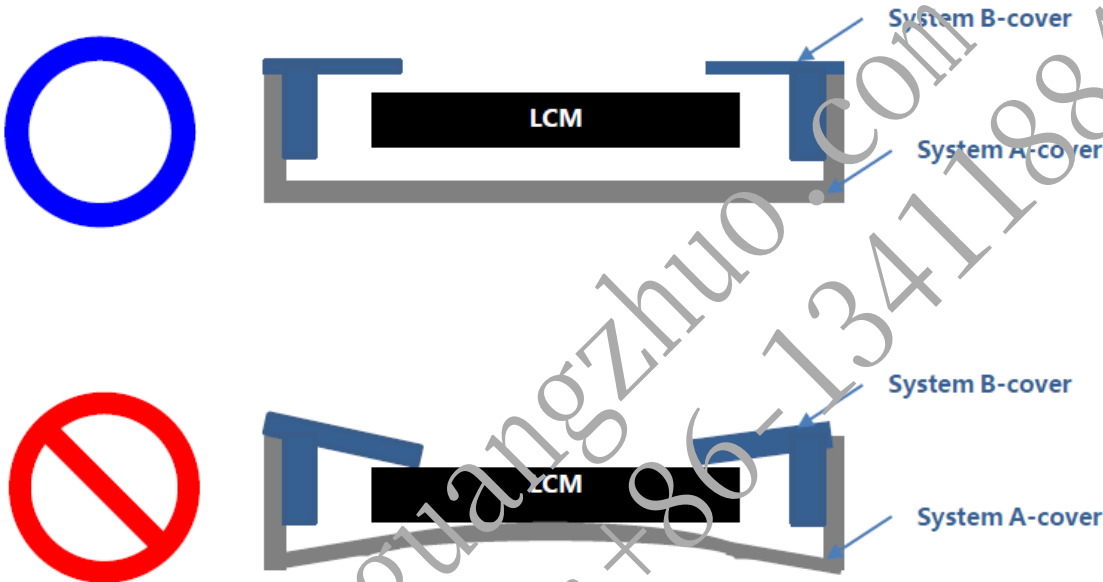


Purpose	The permanent deformation part of System cover after the reliability test, including sponge and other structures or components, can not touch LCM.
---------	--

SPEC. NUMBER	SPEC. TITLE	PAGE
www.szguangzhuo.com 广卓液晶屏 echodeng61@hotmail.com jimei@jimeihk.com +86-13411884959	NV140FHM-T0A V8.0 Product Specification Rev. 0	58 Of 67

BOE www.szguangzhuo.com 广卓液晶 echodeng61@hotmail.com jimei@jimeihk.com +86-13411884959	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	Rev. 0	2020.04.20

Appendix B

A/B-cover near LCD PCBA

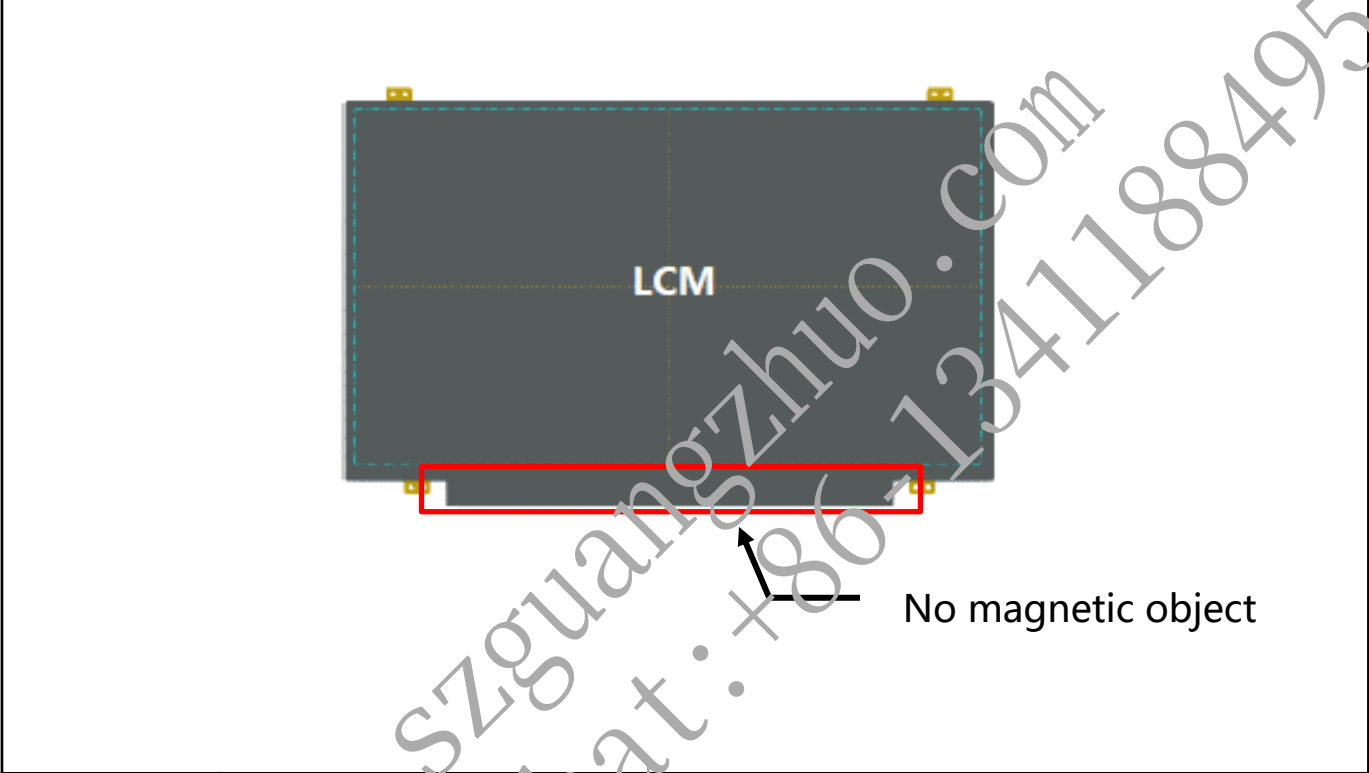


Purpose	There should not have magnet object near LCM PCBA, which is prone to cause physical or electricity noise issue
---------	--

SPEC. NUMBER	SPEC. TITLE	PAGE
www.szguangzhuo.com 广卓液晶 echodeng61@hotmail.com jimei@jimeihk.com +86-13411884959	NV140FHM-T0A V8.0 Product Specification Rev. 0	59 Of 67

BOE www.szguangzhuo.com 广卓液晶屏 echodeng61@hotmail.com jimei@jimeihk.com +86-13411884959	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	Rev. 0	2020.04.20

Appendix B

A-cover add sponges on Boss side wall

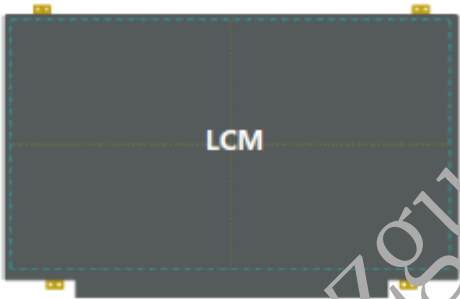


Purpose

We suggest to attach Sponges to the side of the Boss column of A-cover to reduce the panel broken possibility in assembly. It is recommended to this design synchronously.

BOE www.szguangzhuo.com 广卓液晶屏 echodeng61@hotmail.com jimei@jimeihk.com +86-13411884959	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	Rev. 0	2020.04.20

Appendix B

LCM to A-Cover / sponges z-gap

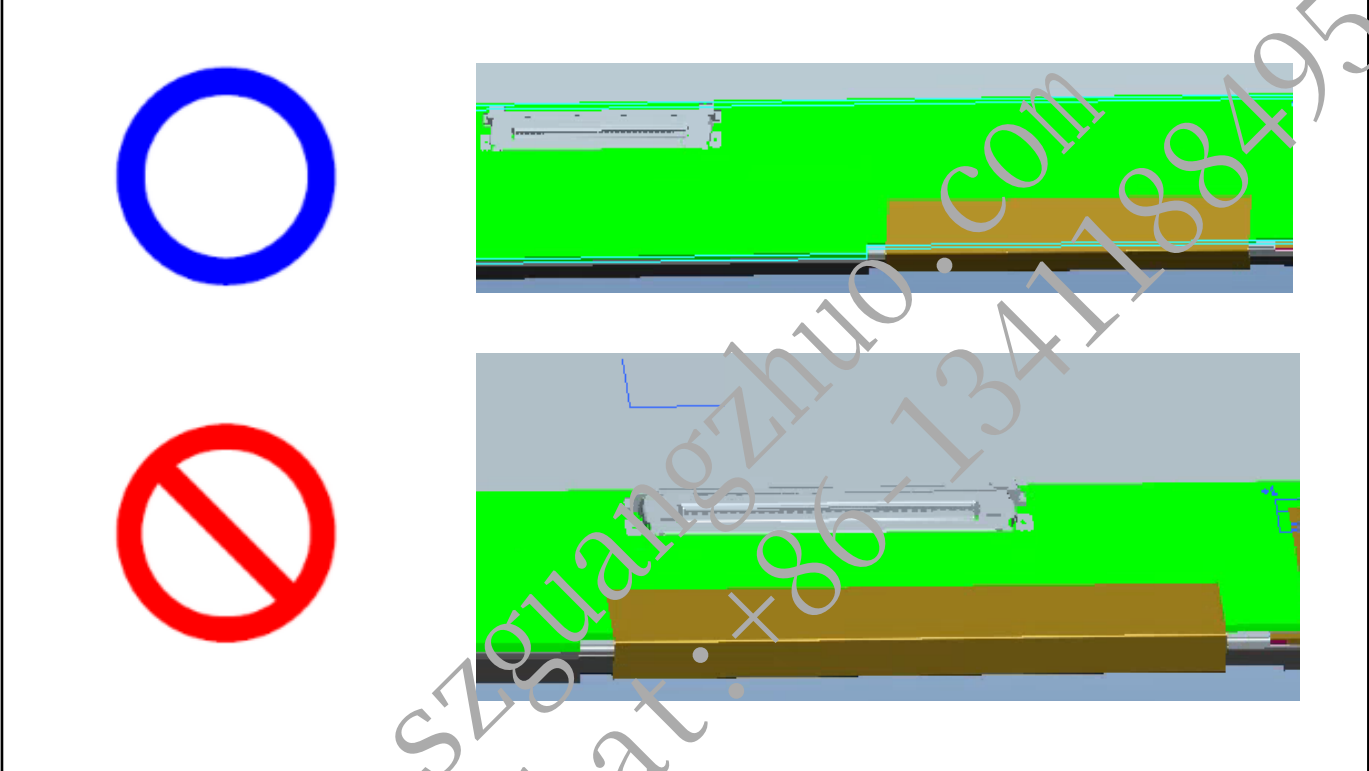


Purpose	Bent product: The position of system connector and FPC should be staggered in X direction. Otherwise, when testing, the system Cable line extrudes FPC, leading to FPC Crack; (Panel FPC Bonding location is related to Mask and can not be changed easily)
---------	---


SPEC. NUMBER	SPEC. TITLE	PAGE
www.szguangzhuo.com 广卓液晶屏 echodeng61@hotmail.com jimei@jimeihk.com +86-13411884959	NV140FHM-T0A V8.0 Product Specification Rev. 0	61 Of 67

Appendix C

HPD Signal recognition

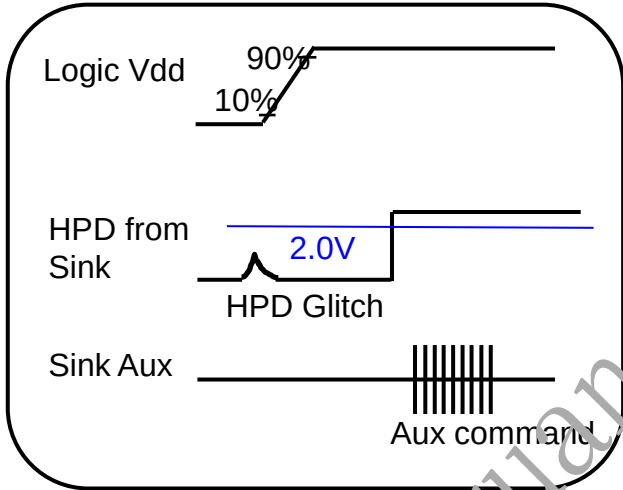

Normal Signal (Ignore HPD Glitch)

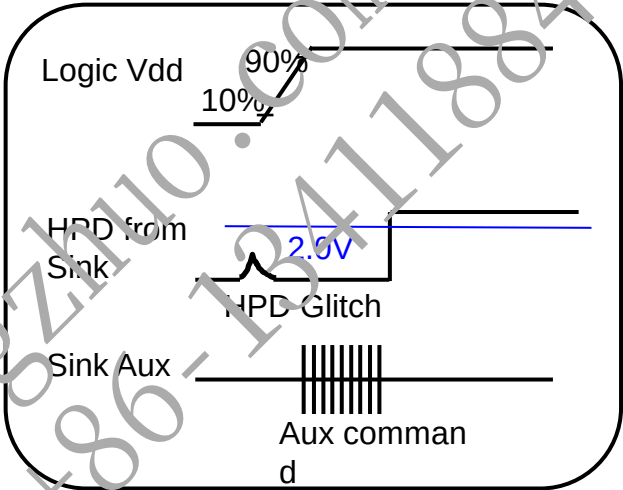


Abnormal Signal

Purpose	When HPD glitch of source device minimum is 2.0(V).
---------	---

Appendix C

HPD Signal Definition IRQ (Interrupt Request)


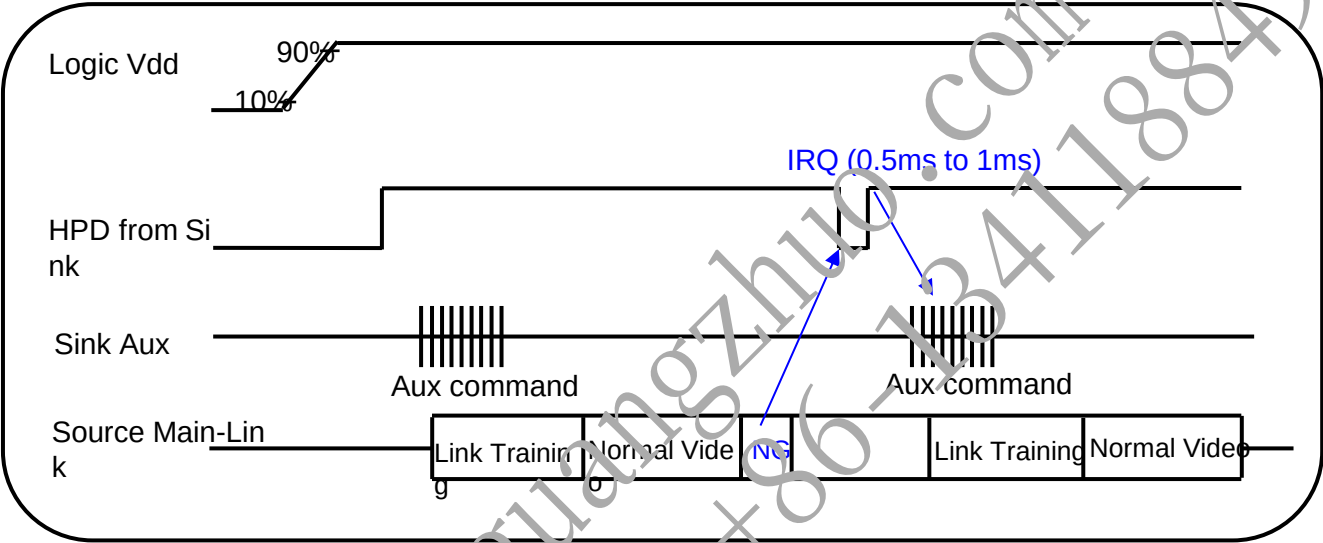


Purpose

When HPD signal low than 0.5ms to 1ms, the source device should check sink status field from the DPCD and take link training again.

Appendix C

Main link eye diagram of TP3

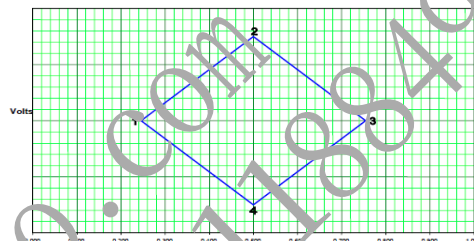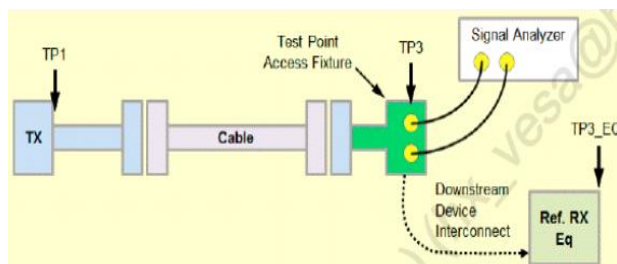

Measured TP3 on LCM connector.

Downstream Device Mask at TP3

	UI	Voltage
1	0.246	0
2	0.5	0.075
3	0.755	0
4	0.5	-0.075

Eye for TP3 at HBR

	UI	Voltage
1	0.375	0
2	0.5	0.023
3	0.625	0
4	0.5	-0.023


Eye for TP3 at RBR

Purpose

1. Main Link EYE Diagram should meet TP3 point of VESA.
2. The measure method is through access fixture.

Appendix C

Impedance Profile through a DP Connector

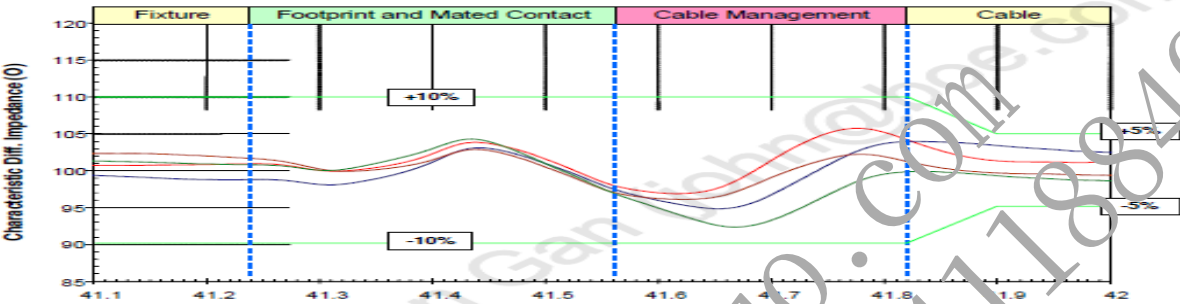

Differential Impedance Profile Measurement Data Example


Segment	Differential Impedance Value	Maximum Tolerance
Fixture	100Ω/85Ω VESA	±10%
Connector	100Ω/85Ω VESA	±10%
Wire management	100Ω/85Ω VESA	±10%
Cable	100Ω/85Ω VESA	±5%

Impedance Profile Values for Cable Assembly

Purpose	Cable Impedance Profile 100ohm for Cable Assembly
---------	---

Appendix C

Main Link Pixel Freq information value of MSA data

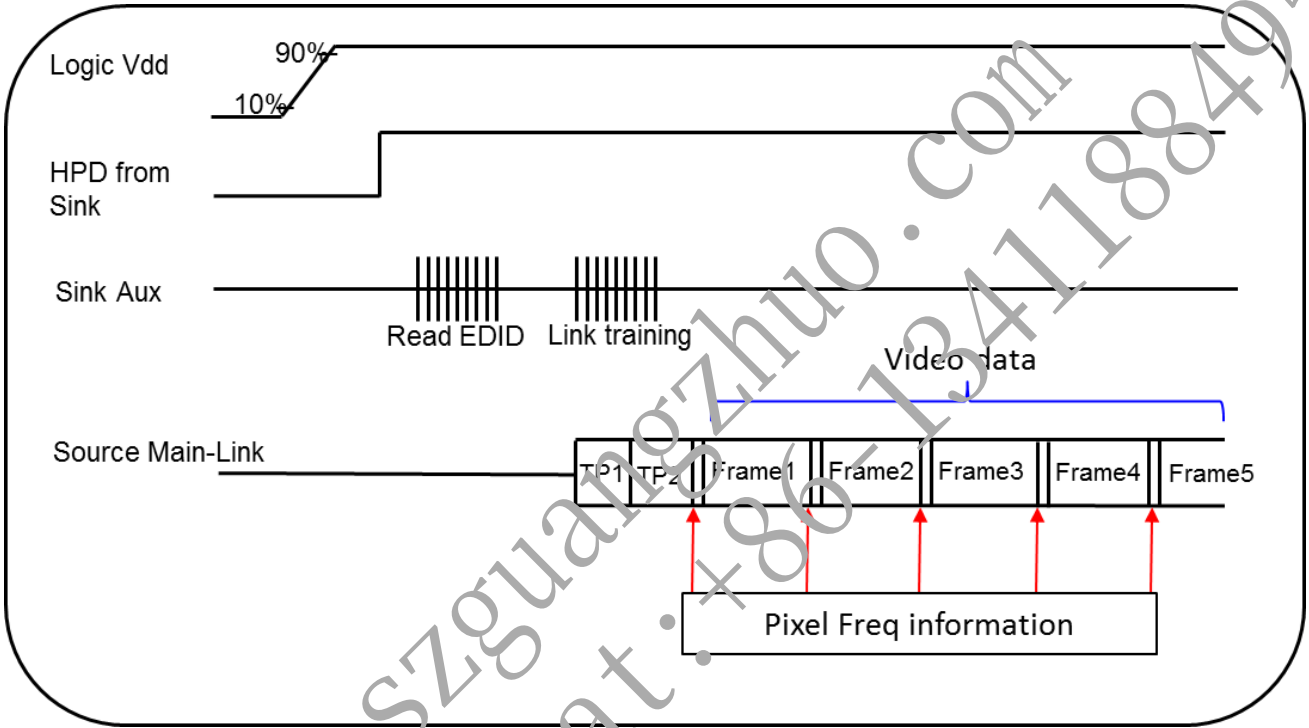


Purpose

- 1. It need to fix pixel freq information value of MSA data output to prevent the initial abnormal pixel freq information value from incoming after power on.
- 2. BOE can read DPCD to check this value. Ex: BIOS is 1.62G , but into windows is 2.7G.

Appendix C

Main Link Pixel Freq information value of MSA data

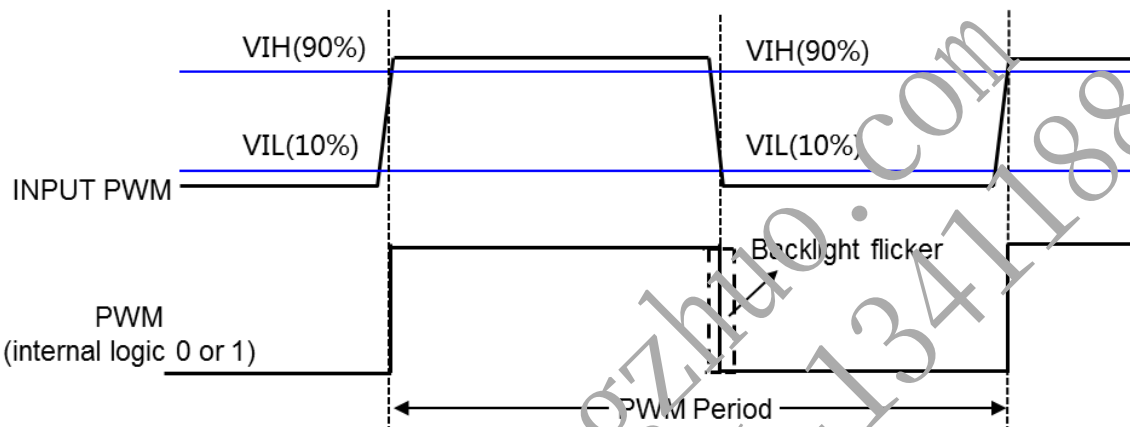

Example:

Freq	Cycle Time	PWM Rising Time	PWM Falling Time
200Hz	5ms	≤1us	≤1us
1KHz	1ms	≤200ns	≤200ns

Purpose

1. LED driver need to calculate the duty cycle of input PWM signal.
2. To avoid backlight flicker visible on LCD, system input PWM suggest :
PWM rising $\leq 200\text{ppm} \times \text{cycle time}$; PWM falling $\leq 200\text{ppm} \times \text{cycle time}$.