


LM270WQ4
Liquid Crystal Display
Product Specification

SPECIFICATION FOR APPROVAL

(●) Preliminary Specification
 () Final Specification

TITLE		27.0" QHD TFT LCD	
BUYER		SUPPLIER	LG Display Co., Ltd.
MODEL		MODEL	LM270WQ4
		SUFFIX	SSE1

*When you obtain standard approval,
 please use the above model name without suffix

APPROVED BY	SIGNATURE	APPROVED BY	SIGNATURE DATE
/		Sanghoon Lee / G.Manager	
		REVIEWED BY	
		Jaewon Hyun / Manager [C]	
		Yunho Hwang / Manager [M]	
		Sangho Han / Manager [O]	
		JongChun Lim / Manager [P]	
		PREPARED BY	
		Hyunchul Jung / Engineer	
Please return 1 copy for your confirmation with your signature and comments.		Product engineering dept. LG Display Co., Ltd	

Product Specification
Contents

No.	Item	Page
	Cover	1
	Contents	2
	Record of Revisions	3
1	General Description	4
2	Absolute Maximum Ratings	5
3	Electrical Specifications	6
3-1	Electrical Characteristics	6
3-2	Interface Connections	9
3-3	Signal Timing Specifications	17
3-4	Signal Timing Waveforms	18
3-5	Color Data Reference	19
3-6	Power Sequence	20
3-7	Power Dip Condition	21
4	Optical Specifications	22
5	Mechanical Characteristics	26
6	Reliability	29
7	International Standards	30
7-1	Safety	30
7-2	Environment	30
8	Packing	31
8-1	Designation of Lot Mark	31
8-2	Packing Form	32
9	Precautions	33
9-1	Mounting Precautions	33
9-2	Operating Precautions	33
9-3	Electrostatic Discharge Control	34
9-4	Precautions For Strong Light Exposure	34
9-5	Storage	34
9-6	Handling Precautions For Protection Film	34

Product Specification

Record of Revisions

Revision No	Revision Date	Page	Before	After	Application Date																																																					
0.1	May. 7. 2020	-	First Draft(Preliminary)	-	May. 7. 2020																																																					
0.2	Oct. 19. 2020	4	Update the content of low blue light panel			Oct. 19. 2020																																																				
		Hazard blue light(415nm~455nm) takes up the portion of blue light(400nm~500nm) less than 50%		The ratio of light in the range from 415nm - 455nm compared to 400nm - 500nm shall be less than 50%																																																						
		22	Update the color coordinates spec																																																							
			<table><tr><td rowspan="10">Color Coordinates [CIE 1931] (By PR650)</td><td>Red</td><td>Rx</td><td>(0.675)</td><td rowspan="10">Typ -0.03</td><td rowspan="10">Typ +0.03</td></tr><tr><td></td><td>Ry</td><td>(0.325)</td></tr><tr><td>Green</td><td>Gx</td><td>(0.310)</td></tr><tr><td></td><td>Gy</td><td>(0.620)</td></tr><tr><td>Blue</td><td>Bx</td><td>(0.145)</td></tr><tr><td></td><td>By</td><td>(0.062)</td></tr><tr><td>White</td><td>Wx</td><td>0.313</td></tr><tr><td></td><td>Wy</td><td>0.329</td></tr></table>	Color Coordinates [CIE 1931] (By PR650)	Red	Rx	(0.675)	Typ -0.03	Typ +0.03		Ry	(0.325)	Green	Gx	(0.310)		Gy	(0.620)	Blue	Bx	(0.145)		By	(0.062)	White	Wx	0.313		Wy	0.329	<table><tr><td rowspan="10">Color Coordinates [CIE 1931] (By PR650)</td><td>Red</td><td>Rx</td><td>(0.671)</td><td rowspan="10">Typ -0.03</td><td rowspan="10">Typ +0.03</td></tr><tr><td></td><td>Ry</td><td>(0.325)</td></tr><tr><td>Green</td><td>Gx</td><td>(0.310)</td></tr><tr><td></td><td>Gy</td><td>(0.620)</td></tr><tr><td>Blue</td><td>Bx</td><td>(0.145)</td></tr><tr><td></td><td>By</td><td>(0.062)</td></tr><tr><td>White</td><td>Wx</td><td>0.313</td></tr><tr><td></td><td>Wy</td><td>0.329</td></tr></table>	Color Coordinates [CIE 1931] (By PR650)	Red	Rx	(0.671)	Typ -0.03	Typ +0.03		Ry	(0.325)	Green	Gx	(0.310)		Gy	(0.620)	Blue	Bx	(0.145)		By	(0.062)	White	Wx	0.313		Wy	0.329
Color Coordinates [CIE 1931] (By PR650)	Red	Rx	(0.675)		Typ -0.03	Typ +0.03																																																				
		Ry	(0.325)																																																							
	Green	Gx	(0.310)																																																							
		Gy	(0.620)																																																							
	Blue	Bx	(0.145)																																																							
		By	(0.062)																																																							
	White	Wx	0.313																																																							
		Wy	0.329																																																							
	Color Coordinates [CIE 1931] (By PR650)	Red	Rx				(0.671)			Typ -0.03	Typ +0.03																																															
			Ry	(0.325)																																																						
Green		Gx	(0.310)																																																							
		Gy	(0.620)																																																							
Blue		Bx	(0.145)																																																							
		By	(0.062)																																																							
White		Wx	0.313																																																							
		Wy	0.329																																																							

Product Specification

1. General Description

LM270WQ4 is a color active matrix liquid crystal display with a Light Emitting Diode(LED) backlight assembly without LED driver. The matrix employs a-Si thin film transistor as the active element. It is a transmissive type display operating in the normally black mode. It has a 27 inch diagonally measured active display area with QHD resolution(2560 horizontal by 1440 vertical pixel array). Each pixel is divided into red, green and blue sub-pixels or dots which are arranged in vertical stripes. Gray scale or the brightness of the sub-pixel color is determined with a 8-bit gray scale signal for each dot, thus, presenting a palette of more than 16.78 Million colors. It has been designed to apply 8-bit 4port LVDS interface. It is intended to support displays where high brightness, super wide viewing angle, high color saturation, and high color are important.

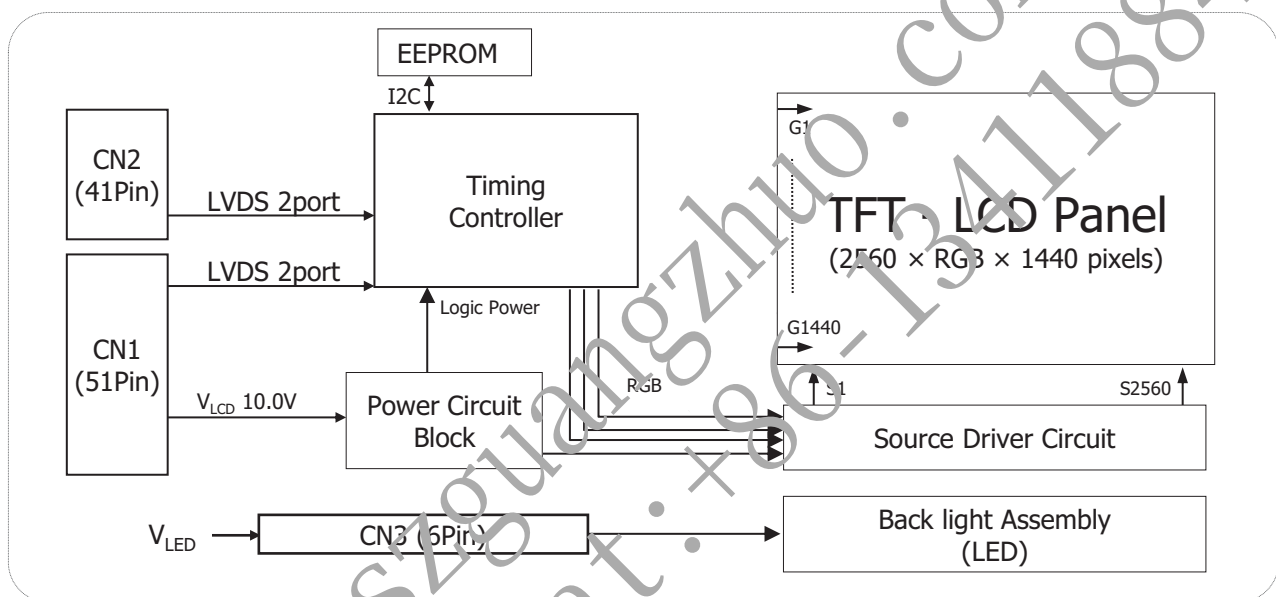


FIG.1 Block Diagram

General Features

Active Screen Size	27 inches(68.47 cm)(Aspect ratio 16:9)
Outline Dimension	608.8(H) × 355.3(V) × 11.8(D) mm(Typ.)
Pixel Pitch	0.2331(H) × 0.2331(V) mm
Pixel Format	2560(H) × 1440(V) Pixels. RGB stripes arrangement.
Color Depth	16.78 Million colors, True 8 Bit
Luminance, White	350 cd/m ² (Center 1Point, Typ.)
Viewing Angle(CR>10)	R/L 178° (Typ.), U/D 178° (Typ.)
Power Consumption	Total (18.7) Watt (Typ.)(5.5) Watt@ Mosaic_V _{LCD} , (13.2)Watt@ Is = (65)mA)
Weight	(3,200g) (Typ.)
Display Operating Mode	Transmissive mode, Normally black
Panel type	Reverse type
Surface Treatment	Anti-Glare treatment of the front polarizer(Haze25%, 3H)
Low Blue Light Panel	The ratio of light in the range from 415nm - 455nm compared to 400nm - 500nm shall be less than 50%

Product Specification

2. Absolute Maximum Ratings

The following are maximum values which, if exceeded, may cause faulty operation or damage to the unit.

Table 2-1. Absolute Maximum Ratings

Parameter	Symbol	Values		Units	Notes
		Min	Max		
Power Supply Input Voltage	V_{LCD}	-0.3	+11.0	V_{DC}	At 25°C
Operating Temperature	T_{OP}	0	50	°C	
Storage Temperature	T_{ST}	-20	60	°C	
Operating Ambient Humidity	H_{OP}	10	90	%RH	1,2,3
Storage Humidity	H_{ST}	10	90	%RH	
LCM Surface Temperature(Operation)	$T_{surface}$	0	65	°C	1,4

Notes:

- 1) Temperature and relative humidity range are shown in the figure below.
Wet bulb temperature should be 39°C Max, and no condensation of water.
- 2) Maximum storage humidity is up to 40°C, 70% RH only for 4 corner light leakage mura.
- 3) Storage condition is guaranteed under packing condition.
- 4) LCM surface temperature should be measured under the condition of $V_{LCD} = \text{Typ}$, $f_V = 60\text{Hz}$, $T_a = 25^\circ\text{C}$, no humidity and typical LED string current

* f_V = Frame frequency

* T_a = Ambient temperature

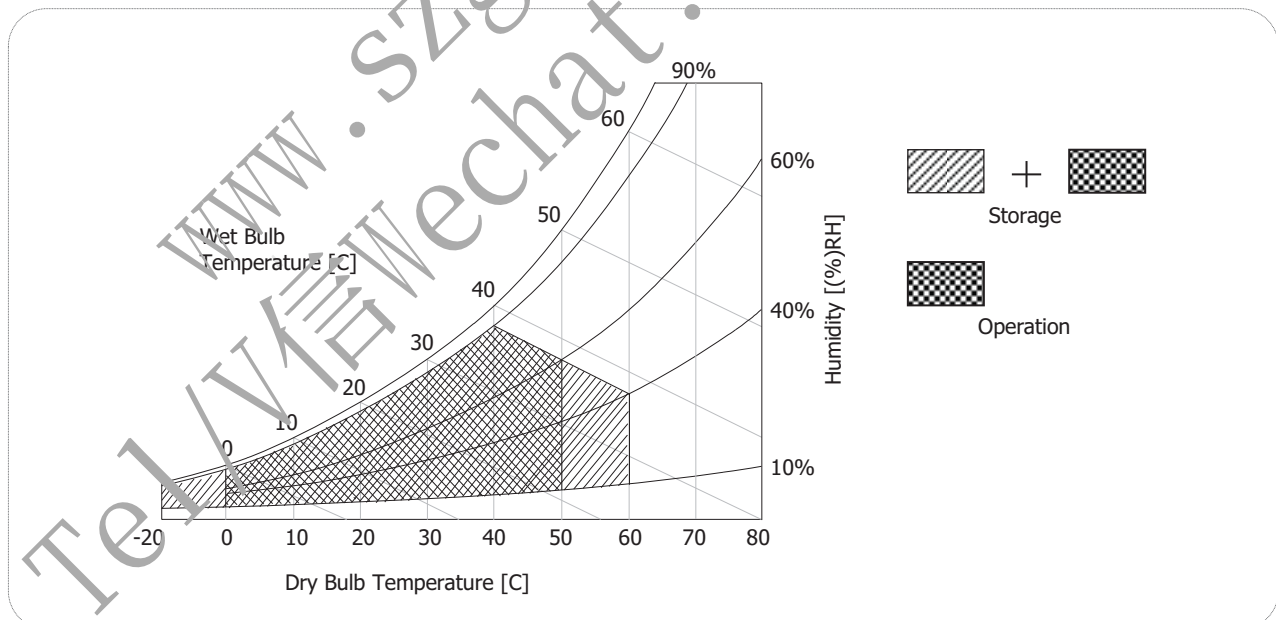


FIG.2 Temperature And Relative Humidity



Product Specification

3. Electrical Specifications

3-1. Electrical Characteristics

It requires two power inputs. One is employed to power the LCD electronics and to drive the TFT array and liquid crystal. The other input power for the LED/Backlight, is typically generated by a LED Driver. The LED Driver is an external unit to the LCDs.

Table 3-1. Electrical Characteristics

Parameter	Symbol	Values			Unit	Notes
		Min	Typ	Max		
Module:						
Power Supply Input voltage	V _{LCD}	9.5	10.0	10.5	V _{dc}	4
Permissive Power Input Ripple	V _{RIPPLE}	-	-	400	mVp-p	1
Power Supply Input Current	I _{LCD} Typ.	-	(550)	(590)	mA	2 (Non-fix)
	I _{LCD} Max.	-	(720)	(900)	mA	
Power Consumption	P _{LCD} Typ.	-	(5.5)	(7.3)	Watt	
	P _{LCD} Max.	-	(7.2)	(9.5)	Watt	
Rush Current	I _{RUSH}	-	-	4.0	A	3


Notes:

- 1) Permissive power ripple should be measured under the condition of $V_{LCD} = \text{Typ}$, $25 \pm 2^\circ\text{C}$, $f_v = \text{Max}$. Refer to page 7 for the pattern and more information.
- 2) The specified current and power consumption can be measured under the $V_{LCD} = \text{Typ}$, $25 \pm 2^\circ\text{C}$, $f_v = 60\text{Hz}$ and the pattern should be changed according to the typical or maximum power condition. The max. current can be measured only with the maximum power pattern. See the page 7 for details.
- 3) Maximum condition of inrush current:
The duration of rush current is about 5ms and rising time of power input is $500\mu\text{s} \pm 20\%$ (Min).
- 4) V_{LCD} level must be measured between two points on PCB of LCM $V_{LCD}(\text{test point}) \sim \text{LCM Ground}$.
(Test condition: Maximum power pattern, 25°C , $f_v = 60\text{Hz}$)

* f_v = Frame frequency

Product Specification


- **Permissive Power Input Ripple**($V_{LCD} = \text{Typ}, 25^{\circ}\text{C}, f_V(\text{frame frequency}) = \text{Max condition}$)



White Pattern

For the exact ripple measurement, the condition of Max 20MHz is recommended in the bandwidth configuration of oscilloscope.

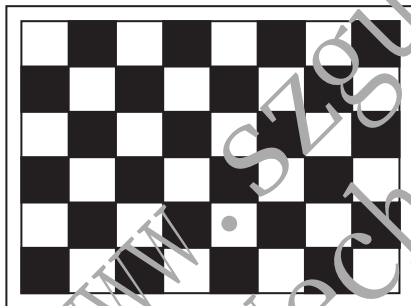- **Power Consumption**($V_{LCD} = \text{Typ}, 25^{\circ}\text{C}, f_V(\text{frame frequency}) = 60\text{Hz condition}$)



Typical Power Pattern



Maximum Power Pattern

FIG.3-1 Mosaic Pattern & White Pattern For Power Consumption Measurement

Product Specification
Table 3-2. LED Bar Electrical Characteristics

Parameter	Symbol	Values			Unit	Notes
		Min	Typ	Max		
LED String Current	Is	-	(65)	(70)	mA	1,2
LED String Voltage	Vs	(47.2)	(50.8)	(54.4)	V	1,3
Power Consumption	PBar	-	(13.2)	(14.1)	Watt	2,3
LED Life Time	LED_LT	30,000	-	-	Hrs	4

Note: The LED consists of 72 LED packages, 4 strings(parallel) x 18 packages(serial) x 1 bar

Notes:

- 1) The specified values are for single LED bar.
- 2) The specified current is defined as the input current for single LED string with 100% duty cycle.
- 3) The specified voltage is the input LED string voltage at typical current 100% duty cycle.
- 4) The LED life time is defined as the when brightness of LED itself reach to the 50% of initial value under the conditions at $T_a = 25 \pm 2^\circ\text{C}$ and typical LED string current.
- 5) The power consumption shown above does not include the loss of external LED driver.
 The typical power consumption is calculated as $P_{\text{Bar}} = V_s(\text{Typ.}) \times I_s(\text{Typ.}) \times \text{No. of strings}$.
 The maximum power consumption is calculated as $P_{\text{Bar}} = V_s(\text{Max.}) \times I_s(\text{Typ.}) \times \text{No. of strings}$.

Product Specification

3-2. Interface Connections

3-2-1. LCD Module

- LCD Connector(Receptacle): IS050-C51B-C39-A(UJU) or FI-RE51S-F(JAE) or GT05P-51S-H38-E1500(LSM)
- Mating Connector(Plug): FI-RE51HL(Manufactured by JAE)

Table 3-3. Module Connector(CN1) Pin Configuration

No	Symbol	Description	No	Symbol	Description
1	GND	Ground	27	NC	No Connection
2	NC	No Connection	28	R2AN	SECOND LVDS Receiver Signal(A-)
3	NC	No Connection	29	R2AP	SECOND LVDS Receiver Signal(A+)
4	NC	No Connection(I2C serial interface for LCM:SDA)	30	R2BN	SECOND LVDS Receiver Signal(B-)
5	NC	No Connection(I2C serial interface for LCM:SCL)	31	R2BP	SECOND LVDS Receiver Signal(B+)
6	ITLC	Ground	32	R2CN	SECOND LVDS Receiver Signal(C-)
7	DRA	'H'(3.3V)= Data Re-Arrange Concept, 'L'=normal (Connect High or Low, No NC Condition)	33	R2CP	SECOND LVDS Receiver Signal(C+)
8	NC	No Connection	34	GND	Ground
9	NC	No Connection	35	R2CLKN	SECOND LVDS Receiver Clock Signal(-)
10	PWM_OUT	Reference signal for LED Driver control	36	R2CLKP	SECOND LVDS Receiver Clock Signal(+)
11	GND	Ground	37	GND	Ground
12	R1AN	FIRST LVDS Receiver Signal(A-)	38	R2DN	SECOND LVDS Receiver Signal(D-)
13	R1AP	FIRST LVDS Receiver Signal(A+)	39	R2DP	SECOND LVDS Receiver Signal(D+)
14	R1BN	FIRST LVDS Receiver Signal(B-)	40	NC	No Connection
15	R1BP	FIRST LVDS Receiver Signal(B+)	41	NC	No Connection
16	R1CN	FIRST LVDS Receiver Signal(C-)	42	Reserved	No Connection or GND
17	R1CP	FIRST LVDS Receiver Signal(C+)	43	Reserved	No Connection or GND
18	GND	Ground	44	GND	Ground
19	R1CLKN	FIRST LVDS Receiver Clock Signal(-)	45	GND	Ground
20	R1CLKP	FIRST LVDS Receiver Clock Signal(+)	46	GND	Ground
21	GND	Ground	47	NC	No Connection
22	R1DN	FIRST LVDS Receiver Signal(D-)	48	V _{LCD}	Power Supply +10.0V
23	R1DP	FIRST LVDS Receiver Signal(D+)	49	V _{LCD}	Power Supply +10.0V
24	NC	No Connection	50	V _{LCD}	Power Supply +10.0V
25	NC	No Connection	51	V _{LCD}	Power Supply +10.0V
26	Reserved	No Connection or GND	-	-	-

Notes:

- 1) All GND(ground) pins should be connected together to the LCD module's metal frame.
- 2) All V_{LD}(power input) pins should be connected together.
- 3) All input level of LVDS signals are based on the EIA 644 standard.
- 4) ITLC is used for image sticking reduction in interlace mode.
(L: Normal mode, H: Interlace image sticking reduction mode)
This pin should be connected to GND in normal mode.
(Low level Input Voltage : GND ~ 0.4V, High level Input Voltage : 1.6 ~ 3.6V)
- 5) PWM_OUT is a reference signal for LED PWM control. This PWM signal is synchronized with vertical frequency. If the system don't use this pin, do not connect.

Product Specification


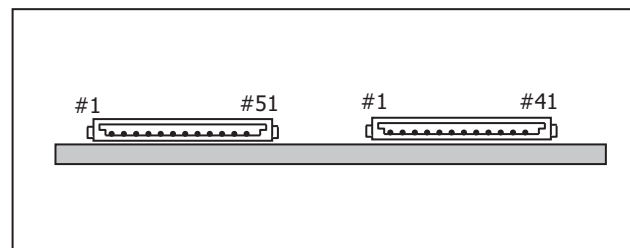
- LCD Connector(Receptacle): IS050-C41B-C39-A(UJU) or FI-RE41S-F(JAE) or GT05P-41S-H38-E1500(LSM)
- Mating Connector(Plug): FI-RE41HL(Manufactured by JAE)

Table 3-3-1. Module Connector(CN2) Pin Configuration

No	Symbol	Description	No	Symbol	Description
1	NC	No Connection(Reserved)	22	NC	No Connection
2	NC	No Connection	23	NC	No Connection
3	NC	No Connection	24	GND	Ground
4	NC	No Connection	25	GND	Ground
5	NC	No Connection	26	R4AN	FORTH LVDS Receiver Signal(A-)
6	NC	No Connection	27	R4AP	FORTH LVDS Receiver Signal(A+)
7	NC	No Connection	28	R4BN	FORTH LVDS Receiver Signal(B-)
8	NC	No Connection	29	R4BP	FORTH LVDS Receiver Signal(B+)
9	GND	Ground	30	R4CN	FORTH LVDS Receiver Signal(C-)
10	R3AN	THIRD LVDS Receiver Signal(A-)	31	R4CP	FORTH LVDS Receiver Signal(C+)
11	R3AP	THIRD LVDS Receiver Signal(A+)	32	GND	Ground
12	R3BN	THIRD LVDS Receiver Signal(B-)	33	R4CLN	FORTH LVDS Receiver Clock Signal(-)
13	R3BP	THIRD LVDS Receiver Signal(B+)	34	R4CLKP	FORTH LVDS Receiver Clock Signal(+)
14	R3CN	THIRD LVDS Receiver Signal(C-)	35	GND	Ground
15	R3CP	THIRD LVDS Receiver Signal(C+)	36	R4DN	FORTH LVDS Receiver Signal(D-)
16	GND	Ground	37	R4DP	FORTH LVDS Receiver Signal(D+)
17	R3CLKN	THIRD LVDS Receiver Clock Signal(-)	38	NC	No Connection
18	R3CLKP	THIRD LVDS Receiver Clock Signal(+)	39	NC	No Connection
19	GND	Ground	40	GND	Ground
20	R3DN	THIRD LVDS Receiver Signal(D-)	41	GND	Ground
21	R3DP	THIRD LVDS Receiver Signal(D+)	-	-	-

Notes:

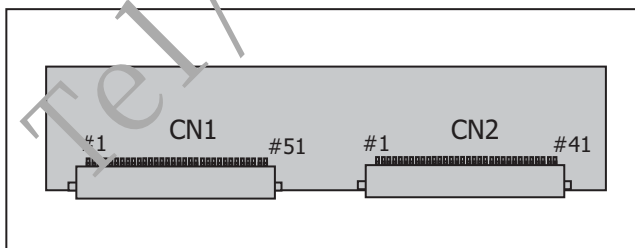- 1) All GND(ground) pins should be connected together to the LCD module's metal frame.



Rear view of LCM

Product Specification
Required signal assignment for flat link(TI:SN75LVDS83) transmitter

No	Pin Name	Required Signal	No	Pin Name	Required Signal
1	VCC	Power supply for TTL Input	29	GND	Ground pin for TTL
2	D5	TTL Input(R7)	30	D26	TTL Input(DE)
3	D6	TTL Input(R5)	31	Tx CLKIN	TTL Level clock Input
4	D7	TTL Input(G0)	32	PWR DWN	Power down Input
5	GND	Ground pin for TTL	33	PLL GND	Ground pin for PLL
6	D8	TTL Input(G1)	34	PLL VCC	Power supply for PLL
7	D9	TTL Input(G2)	35	PLL GND	Ground pin for PLL
8	D10	TTL Input(G6)	36	LVDS GND	Ground pin for LVDS
9	VCC	Power supply for TTL Input	37	Tx OUT3 +	Positive LVDS differential data output 3
10	D11	TTL Input(G7)	38	Tx OUT3 -	Negative LVDS differential data output 3
11	D12	TTL Input(G3)	39	Tx CLKOUT +	Positive LVDS differential clock output
12	D13	TTL Input(G4)	40	Tx CLKOUT -	Negative LVDS differential clock output
13	GND	Ground pin for TTL	41	Tx OUT2 +	Positive LVDS differential data output 2
14	D14	TTL Input(G5)	42	Tx OUT2 -	Negative LVDS differential data output 2
15	D15	TTL Input(B0)	43	LVDS GND	Ground pin for LVDS
16	D16	TTL Input(B6)	44	LVDS VCC	Power supply for LVDS
17	VCC	Power supply for TTL Input	45	Tx OUT1 +	Positive LVDS differential data output 1
18	D17	TTL Input(B7)	46	Tx OUT1 -	Negative LVDS differential data output 1
19	D18	TTL Input(B1)	47	Tx OUT0 +	Positive LVDS differential data output 0
20	D19	TTL Input(B2)	48	Tx OUT0 -	Negative LVDS differential data output 0
21	GND	Ground pin for TTL Input	49	LVDS GND	Ground pin for LVDS
22	D20	TTL Input(B3)	50	D27	TTL Input(R6)
23	D21	TTL Input(B4)	51	D0	TTL Input(R0)
24	D22	TTL Input(B5)	52	D1	TTL Input(R1)
25	D23	TTL Input(RSVB)	53	GND	Ground pin for TTL
26	VCC	Power supply for TTL Input	54	D2	TTL Input(R2)
27	D24	TTL Input(HSYNC)	55	D3	TTL Input(R3)
28	D25	TTL Input(VSYNC)	56	D4	TTL Input(R4)

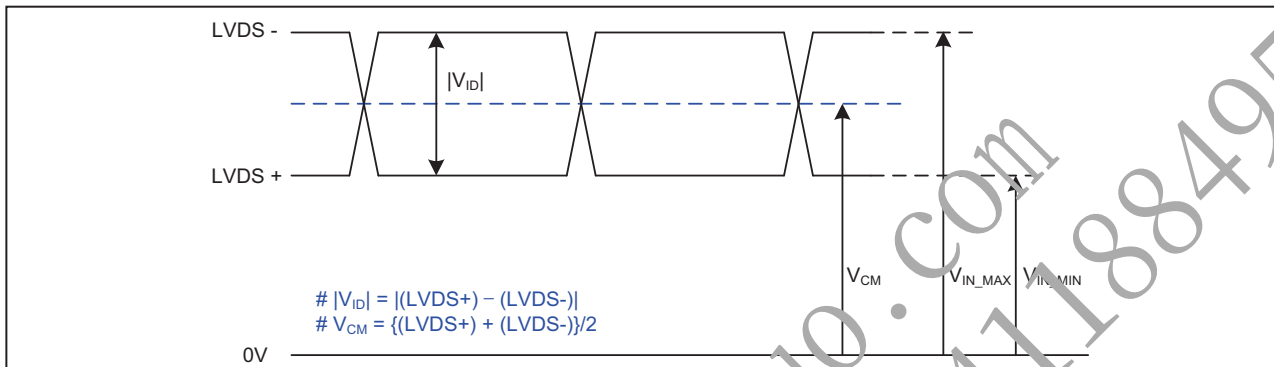
Notes:

- 1) Refer to LVDS transmitter data sheet for detail description.
- 2) 7 means MSB and 0 means LSB at R,G,B pixel data.

Product Specification

3-2-2. LVDS Signal Specifications


1. DC Specification



Parameter	Symbol	Min	Max	Unit	Notes
LVDS Differential voltage	$ V_{ID} $	150	600	mV	
LVDS Common mode voltage	V_{CM}	1.0	1.5	V	
LVDS Input voltage range	V_{IN}	0.7	1.8	V	
Change in common mode voltage	ΔV_{CM}		250	mV	


Notes: Does not have any Noise & Peaking in LVDS Signal.

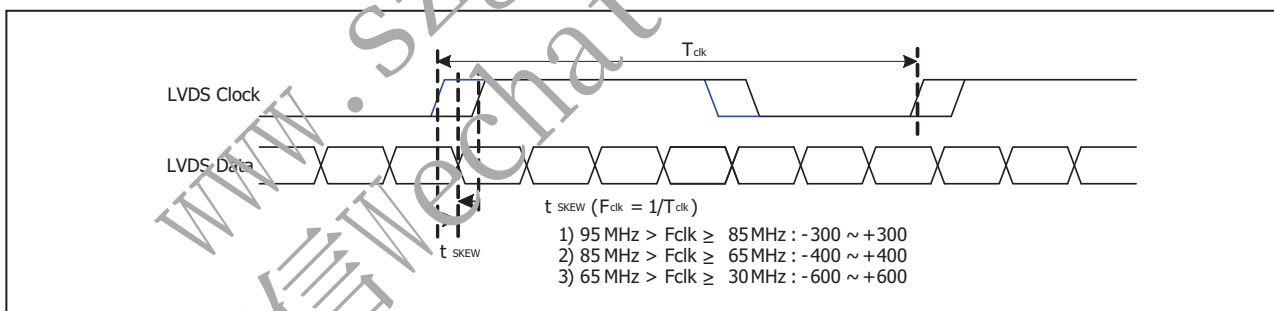2. AC Specification



Parameter	Symbol	Min	Max	Unit	Notes
LVDS Clock to data skew margin	t_{SKEW}	- 300	+ 300	ps	95MHz > Fclk ≥ 85MHz
	t_{SKEW}	- 400	+ 400	ps	85MHz > Fclk ≥ 65MHz
	t_{SKEW}	- 600	+ 600	ps	65MHz > Fclk ≥ 30MHz
LVDS Clock to clock skew margin(Even to odd)	t_{SKEW_EO}	- 1/7	+ 1/7	T_{clk}	-

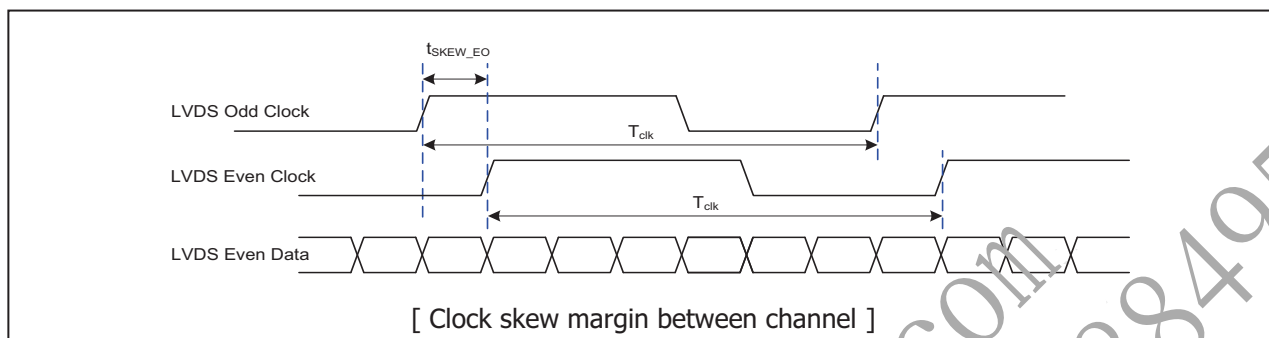
Product Specification




3. Data Format



1) LVDS 4 Port (8Bit, VESA)

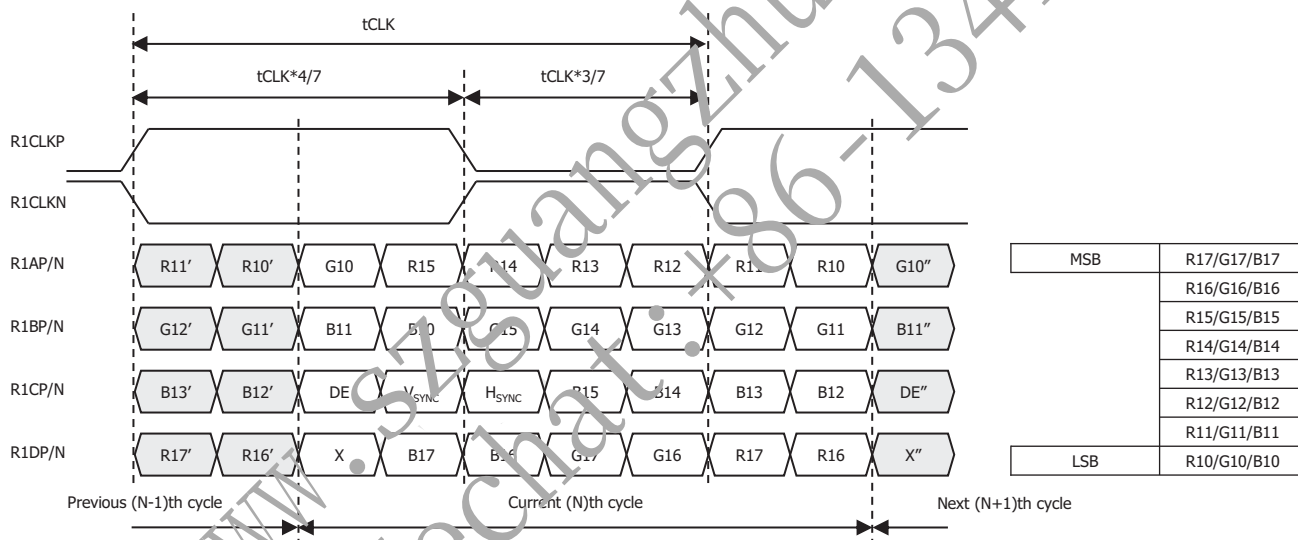■ 1st LVDS Channel




■ 2nd LVDS Channel

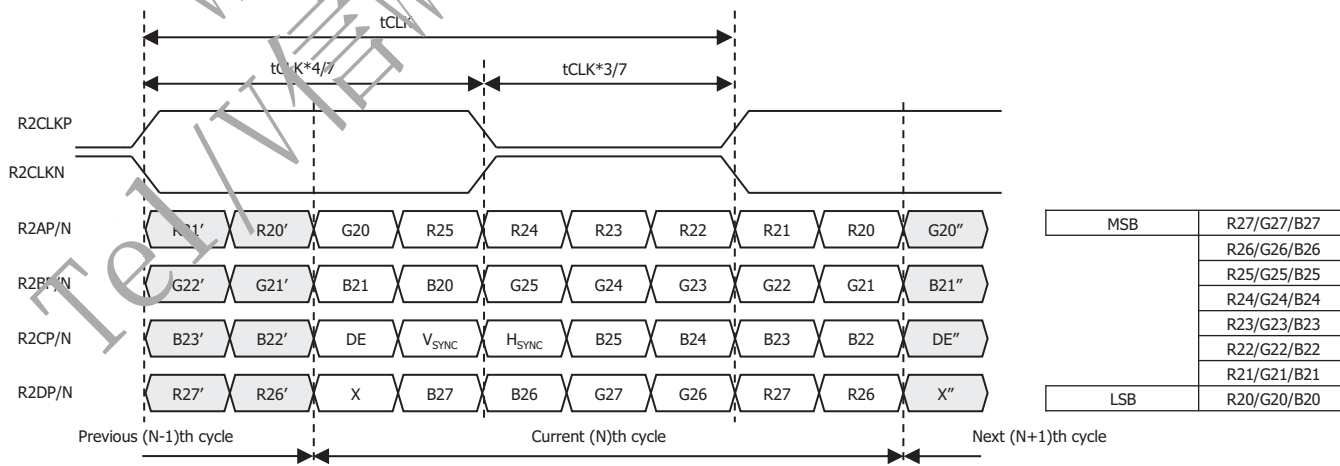

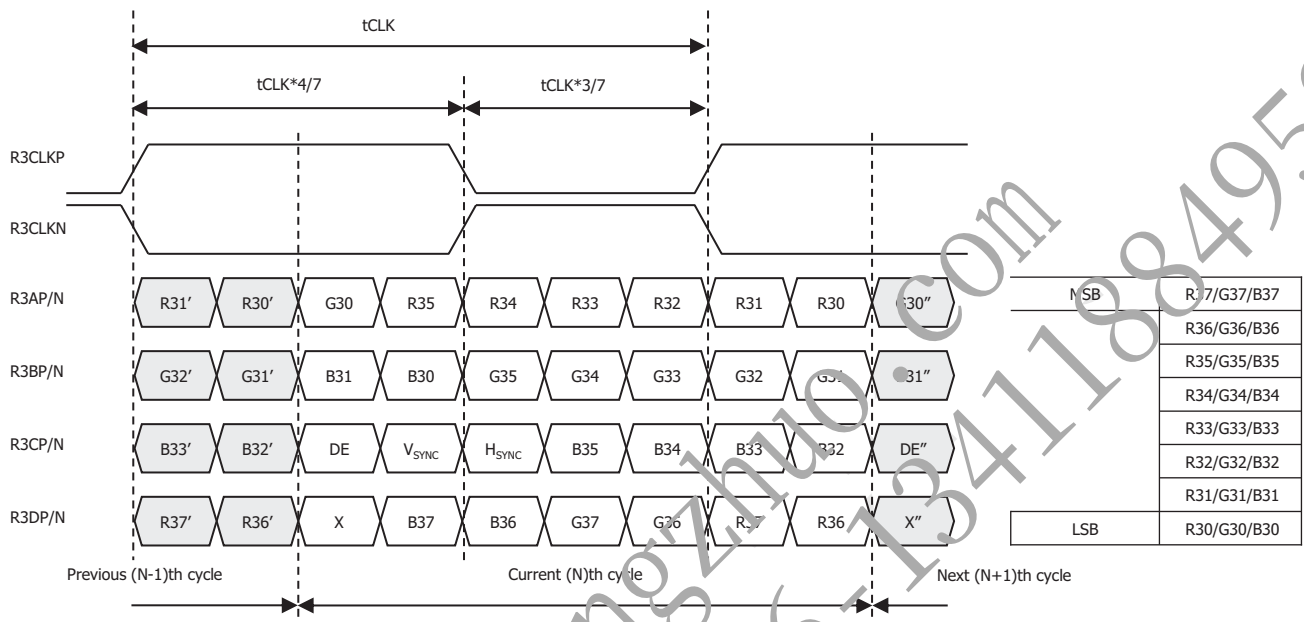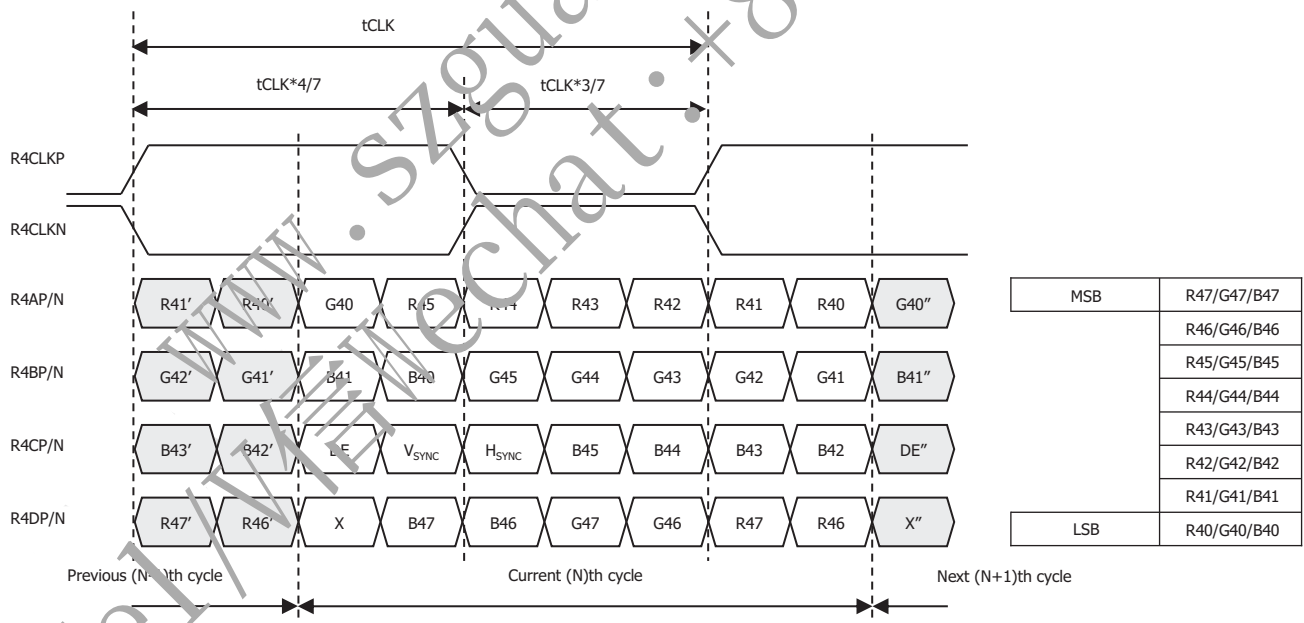Product Specification
3rd LVDS Channel

4th LVDS Channel

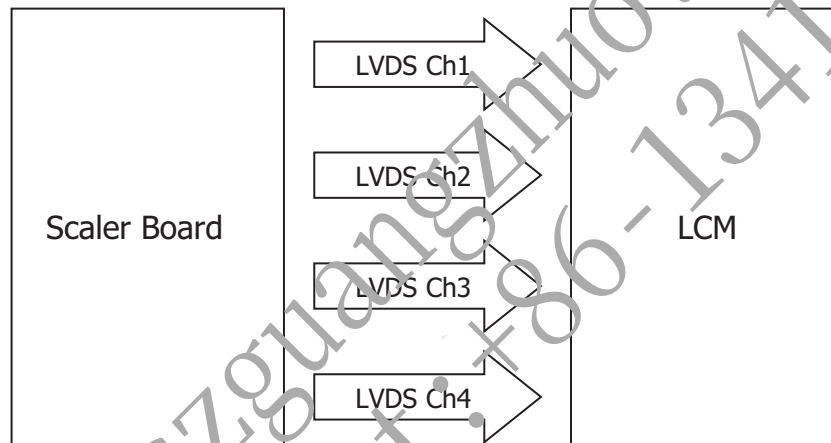
Product Specification

4. LVDS Description of Data Re-Arrange



■ **Normal (Single Screen, Pin # 7 of CN1 = Low)**

LVDS Ch1 : 1 → 5 → ... 1273 → 1277 → 1281 → 1285 → ... 2553 → 2557

LVDS Ch2 : 2 → 6 → ... 1274 → 1278 → 1282 → 1286 → ... 2554 → 2558

LVDS Ch3 : 3 → 7 → ... 1275 → 1279 → 1283 → 1287 → ... 2555 → 2559

LVDS Ch4 : 4 → 8 → ... 1276 → 1280 → 1284 → 1288 → ... 2556 → 2560

■ **DRA (Data Re-Arrange, Pin # 7 of CN1 = High)**

LVDS Ch1 : 1 → 3 → 5 → 7 → ... 1273 → 1275 → 1277 → 1279

LVDS Ch2 : 2 → 4 → 6 → 8 → ... 1274 → 1276 → 1278 → 1280

LVDS Ch3 : 1281 → 1283 → 1285 → 1287 → ... 2553 → 2555 → 2557 → 2559

LVDS Ch4 : 1282 → 1284 → 1286 → 1288 → ... 2554 → 2556 → 2558 → 2560

3-2-3. Backlight Connector Pin Configuration

The LED interface connector is 10035WS-H06D(HF)_wire-locking type manufactured by Yeonho or equivalent. The mating connector is a SHJP-06V-S(HF) or 10035HS-H06C(HF) or equivalent. The pin configuration for the connector is shown in the table below.

Table 3-4. LED Connector Pin Configuration

Pin	Symbol	Description	Notes
1	FB1	Channel1 Current Feedback	
2	FB2	Channel2 Current Feedback	
3	VLED	LED Power Supply (Common mode)	
4	VLED	LED Power Supply (Common mode)	
5	FB3	Channel3 Current Feedback	
6	FB4	Channel4 Current Feedback	

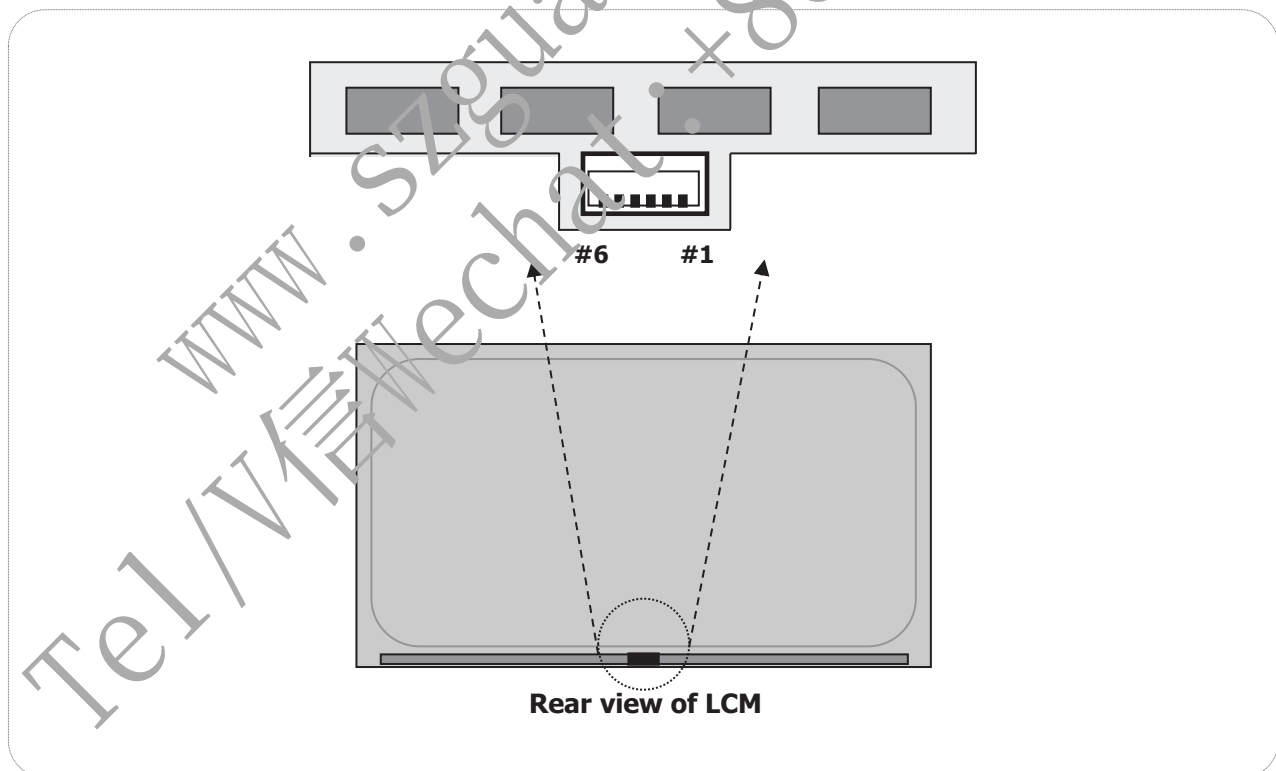


FIG.3-2 Backlight Connector View

Product Specification

3-3. Signal Timing Specifications

This is the signal timing requirement from the signal transmitter. All of the interface signal timing should be satisfied with the following specifications for its proper operation.

Table 3-5. Timing Table


Parameter		Symbol	Min.	Typ.	Max.	Unit	Notes
DCLK	Period	tCLK	13.01	16.26	20.33	ns	Pixel frequency · Typ.245.56MHz
	Frequency	fCLK	49.19	61.49	76.85	MHz	
Hsync	Period	tHP	688	692	696	tCLK	1, 3, 4
	Horizontal Valid	tHV	640	640	640	tCLK	
	Horizontal Blank	tHB	48	52	56	tCLK	
	Width-Active	tWH	8	8	8	tCLK	
Vsync	Period	tVP	1479	1481	1483	tHP	2, 4
	Vertical Valid	tVV	1440	1440	1440	tHP	
	Vertical Blank	tVB	39	41	43	tHP	
	Frequency	fV	49	60	75	Hz	

Notes:


- 1) The value of Hsync Period, Hsync Width and Hsync valid should be even number times of tCLK. If the value is odd number times of tCLK, it can make asynchronous signal timing and cause abnormal display.
- 2) The performance of the electro-optical characteristics may be influenced by variance of the vertical refresh rates.
- 3) The value of Hsync Period, Hsync Width, and Horizontal Back Porch should be divided by 4 without a remainder.
- 4) The polarity of Hsync, Vsync is not restricted.

3-4. Signal Timing Waveforms

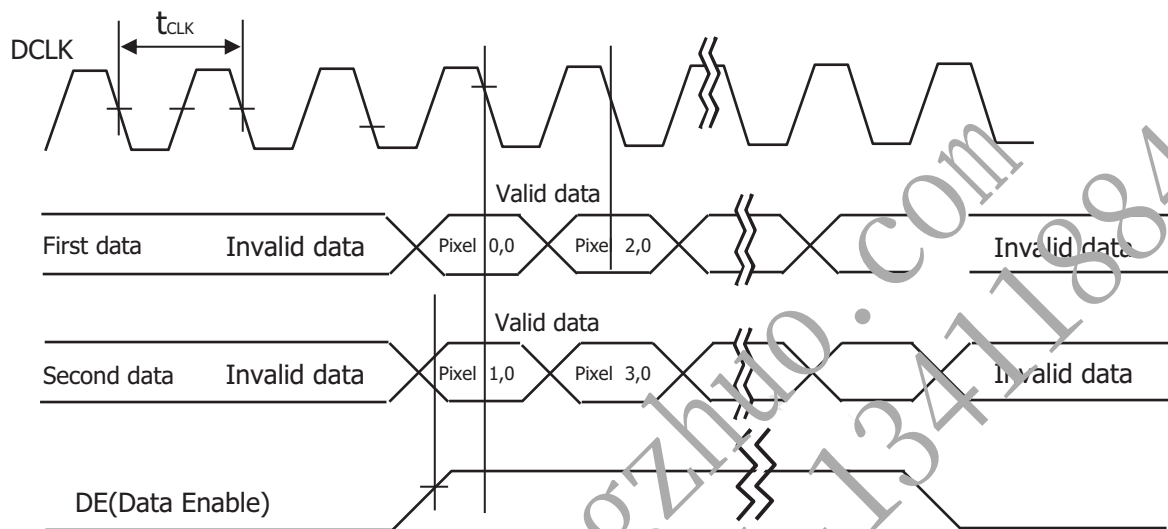
1. DCLK, DE, DATA waveforms



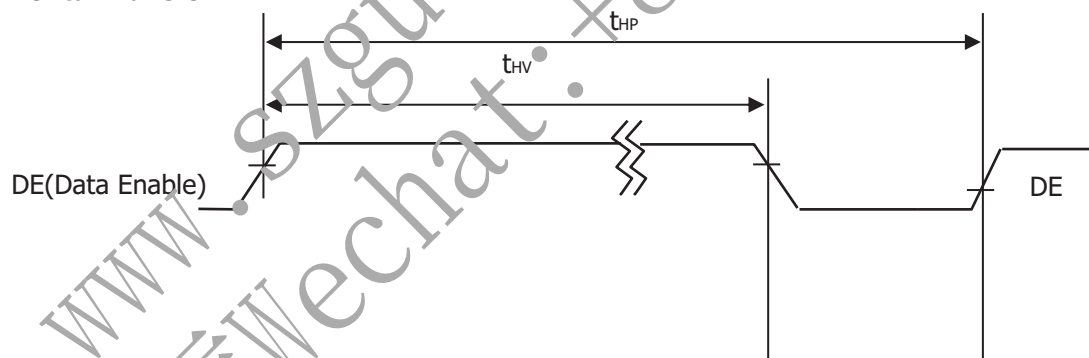2. Horizontal waveform



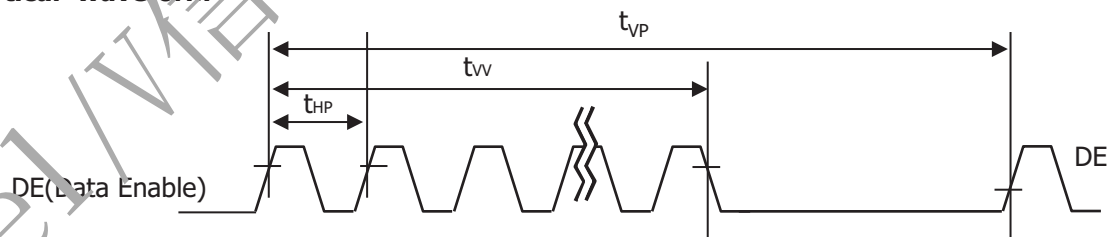3. Vertical waveform



Product Specification


3-5. Color Data Reference

The brightness of each primary color(Red,Green,Blue) is based on the 8-bit gray scale data input for the color; the higher the binary input, the brighter the color.

The table below provides a reference for color versus data input.

Table 3-6. Color Data Reference

Color		Input Color Data																							
		RED								GREEN								BLUE							
		MSB				LSB				MSB				LSB				MSB				LSB			
		R7	R6	R5	R4	R3	R2	R1	R0	G7	G6	G5	G4	G3	G2	G1	G0	B7	B6	B5	B4	B3	B2	B1	B0
Basic Color	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red (255)	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Green (255)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	Blue (255)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Cyan	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	Magenta	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
RED	RED (0)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	RED (1)	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	...	...								...								...							
	RED (254)	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	RED (255)	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	...	...								...								...							
GREEN	GREEN (0)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	GREEN (1)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0
	...	...								...								...							
	GREEN (254)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0
	GREEN (255)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	...	...								...								...							
BLUE	BLUE (0)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	BLUE (1)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0
	...	...								...								...							
	BLUE (254)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0
	BLUE (255)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	...	...								...								...							

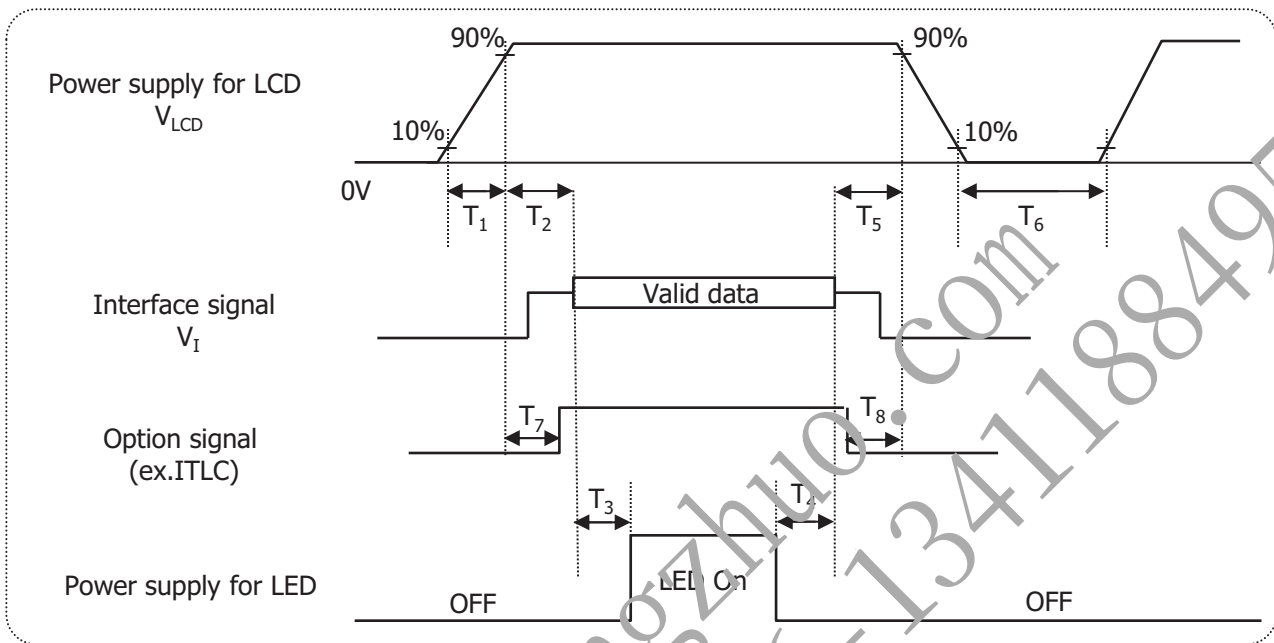Product Specification
3-6. Power Sequence

Table 3-7. Power Sequence

Parameter	Values			Units
	Min.	Typ.	Max.	
T ₁	0.5	-	10	ms
T ₂	0.01	-	50	ms
T ₃	500	-	-	ms
T ₄	200	-	-	ms
T ₅	0.01	-	50	ms
T ₆	1000	-	-	ms
T ₇	0.5	-	T2	ms
T ₈	0	-	-	ms

Notes:

- Power sequence should be kept all the time including below cases for normal operation.
 - AC/DC Power On/Off
 - Mode change (resolution, frequency, timing, sleep mode, color depth change, etc.)
 The violation of power sequence can cause a significant trouble in display and reliability.
- Please avoid floating state of interface signal during signal invalid period.
- When the interface signal is invalid, be sure to pull down the V_{LCD} (0V)
- Please turn off the power supply for LED when the level of V_{LCD} changes to prevent noise issue.
- When measuring valid data starting point, it can be measured that LVDS signal starts swing.

3-7. Power Dip Condition

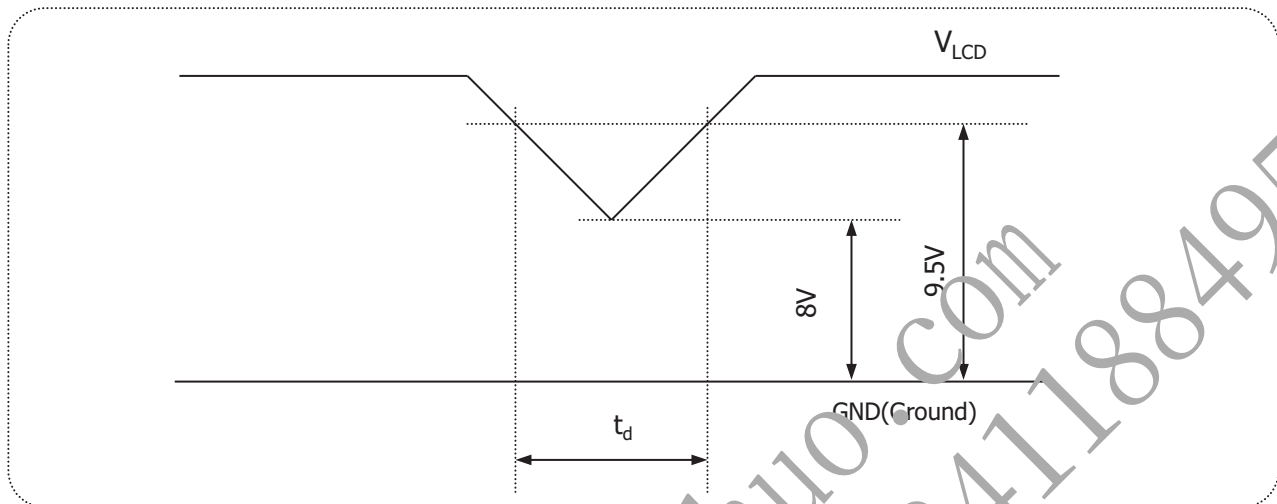


FIG.3-3 Power Dip Condition

For proper operation, stable power supply of V_{LCD} is necessary and power dip is allowed only in below condition. Except this condition, power on/off should follow power sequence specification exactly.

1) Dip Condition

$$8V \leq V_{LCD} < 9.5V, t_d \leq 20ms$$

Product Specification

4. Optical Specifications

Optical characteristics are determined after the unit has been 'ON' for approximately 30 minutes in a dark environment at $25 \pm 2^\circ\text{C}$. The values specified are at an approximate distance 50cm from the LCD surface at a viewing angle of Φ and θ equal to 0° and aperture 1 degree. FIG.4-1 presents additional information concerning the measurement equipment and method.

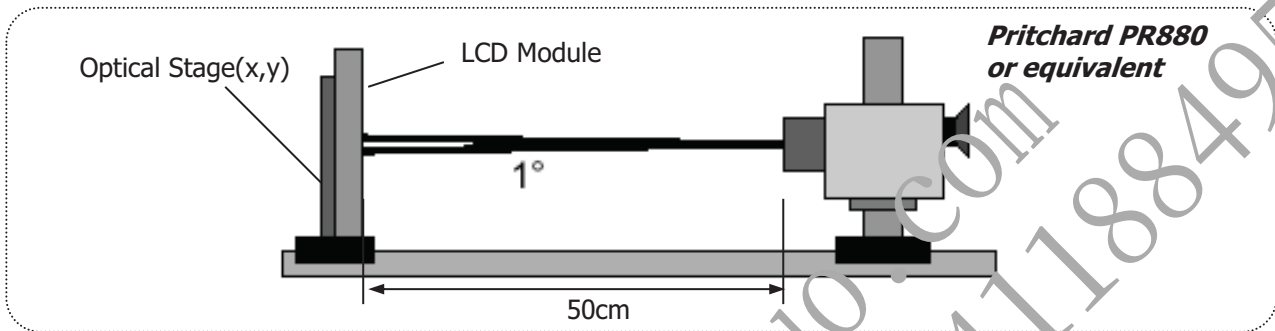


FIG.4-1 Optical Characteristic Measurement Equipment And Method

Table 4-1. Optical Characteristics

($T_a = 25^\circ\text{C}$, $V_{\text{LCD}} = \text{Typ}$, $f_v = 60\text{ Hz}$, $\text{DCLK} = \text{Typ}$, $I_s = \text{Typ}$)

Parameter		Symbol	Values			Units	Notes
			Min	Typ.	Max.		
Contrast Ratio		CR	700	1000	-		1
Surface Luminance, white		L _{WH}	280	350	-	cd/m²	2
Luminance Variation		δ _{WHITE}	75	-	-	%	3
Response Time	Gray to Gray	T _{GTG-VR}	-	14	28	ms	4
Color Gamut (CIE1931)		sRGB	-	99	-	%	
Color Coordinates [CIE 1931] <i>(By PR650)</i>	Red	R _x	Typ -0.03	(0.671)	Typ +0.03		
		R _y		(0.325)			
	Green	G _x		(0.310)			
		G _y		(0.620)			
	Blue	B _x		(0.145)			
		B _y		(0.062)			
	White	W _x		0.313			
		W _y		0.329			
Color Temperature		-	-	6500	-	K	
Viewing Angle (CR>10, General)	Horizontal	θ _H	170	178	-	Degree	5
	Vertical	θ _V	170	178	-		
Gray Scale		-		2.2			6

Product Specification

Notes:

- 1) **Contrast Ratio(CR)** is defined mathematically as: **(By PR880)**
 It is measured at center point(1)

$$\text{Contrast ratio} = \frac{\text{Surface luminance with all white pixels}}{\text{Surface luminance with all black pixels}}$$

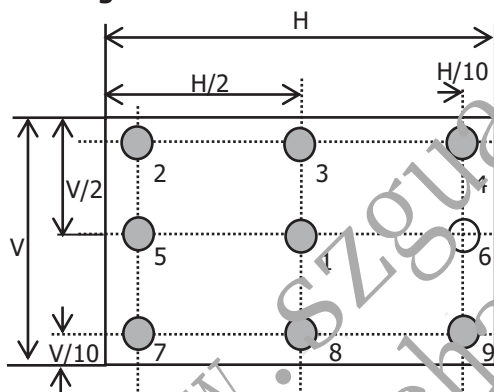
- 2) **Surface Luminance(L_{WH})** is the luminance value at center 1 point(1) across the LCD surface 50cm from the surface with all pixels displaying white. For more information see FIG.4-1. **(By PR880)**

- 3) The **Variation in Surface Luminance**, δ_{WHITE} is defined as: **(By PR880)**

$$\delta_{\text{WHITE}} = \frac{\text{Minimum}(LP_1, LP_2, \dots, LP_9)}{\text{Maximum}(LP_1, LP_2, \dots, LP_9)} \times 100(\%)$$

Where L1 to L9 are the luminance with all pixels displaying white at 9 locations.
 For more information see FIG.4-2.

<Measuring Point For Luminance Variation>



@ H, V: Active Area

<Measuring Point For Surface Luminance>

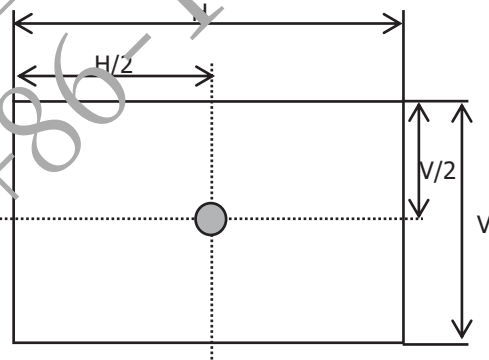


FIG.4-2 Measure Point for Luminance

Product Specification

Notes:

- 4) The **Gray To Gray Response Time** is defined as the following figure and shall be measured by switching the input signal for "Gray To Gray ". **(By RD80S)**
- Gray step: 5 Step
 - T_{GTG_AVR} is the total average time at rising time and falling time for "Gray To Gray ".
 - For the GTG measurement, the sampling rate of oscilloscope is 500k/s.

Table 4-2. GTG Gray

Gray to Gray		Rising Time				
		G255	G191	G127	G63	G0
Falling Time	G255					
	G191					
	G127					
	G63					
	G0					

Response Time is defined as the following figure and shall be measured by switching the input signal for "Gray(N)" and "Gray(M)".

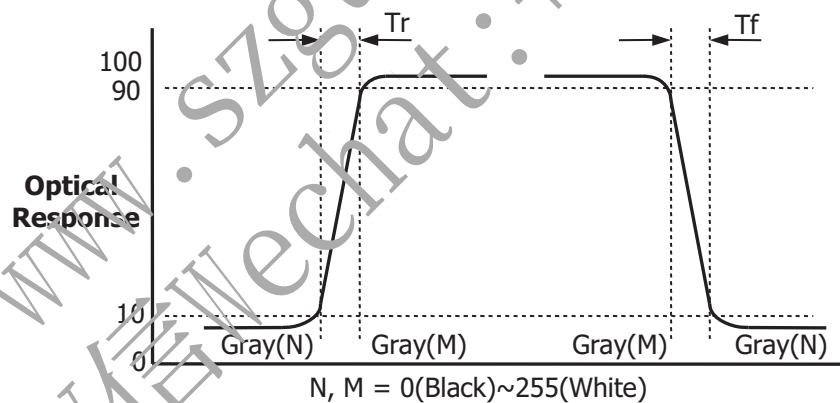


FIG.4-3 Response Time

Product Specification

Notes:

- 5) **Viewing Angle** is the angle at which the contrast ratio is greater than 10. The angles are determined for the horizontal or x axis and the vertical or y axis with respect to the z axis which is normal to the LCD surface. For more information see FIG.4-4. **(By PR880)**

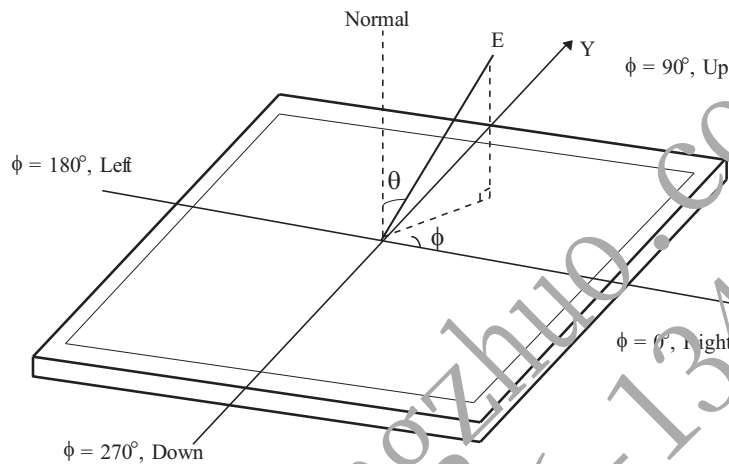


FIG.4-4 Viewing Angle

- 6) **Gamma Value** is approximately 2.2. For more information see below table.

Table 4-3. Gray Scale Specification

Gray Level	Relative Luminance [%](Typ)
0	0.10
15	0.30
31	1.08
47	2.50
63	4.72
79	7.70
95	11.49
111	16.20
127	21.66
143	28.20
159	35.45
175	43.80
191	53.00
207	63.30
223	74.48
239	86.80
255	100

Product Specification

5. Mechanical Characteristics

The contents provide general mechanical characteristics. In addition the figures in the next page are detailed mechanical drawing of the LCD.

Outline Dimension	Horizontal	608.80 mm
	Vertical	355.30 mm
	Depth	11.80 mm
Bezel Area	Horizontal	-
	Vertical	-
Active Display Area	Horizontal	596.74 mm
	Vertical	335.66 mm
Weight	Typ: (3,200g), Max: (3,360g)	
Surface Treatment	Anti-Glare treatment of the front polarizer(Haze75%, 3H)	

Note: Please refer to a mechanical drawing in terms of tolerance at the next page.

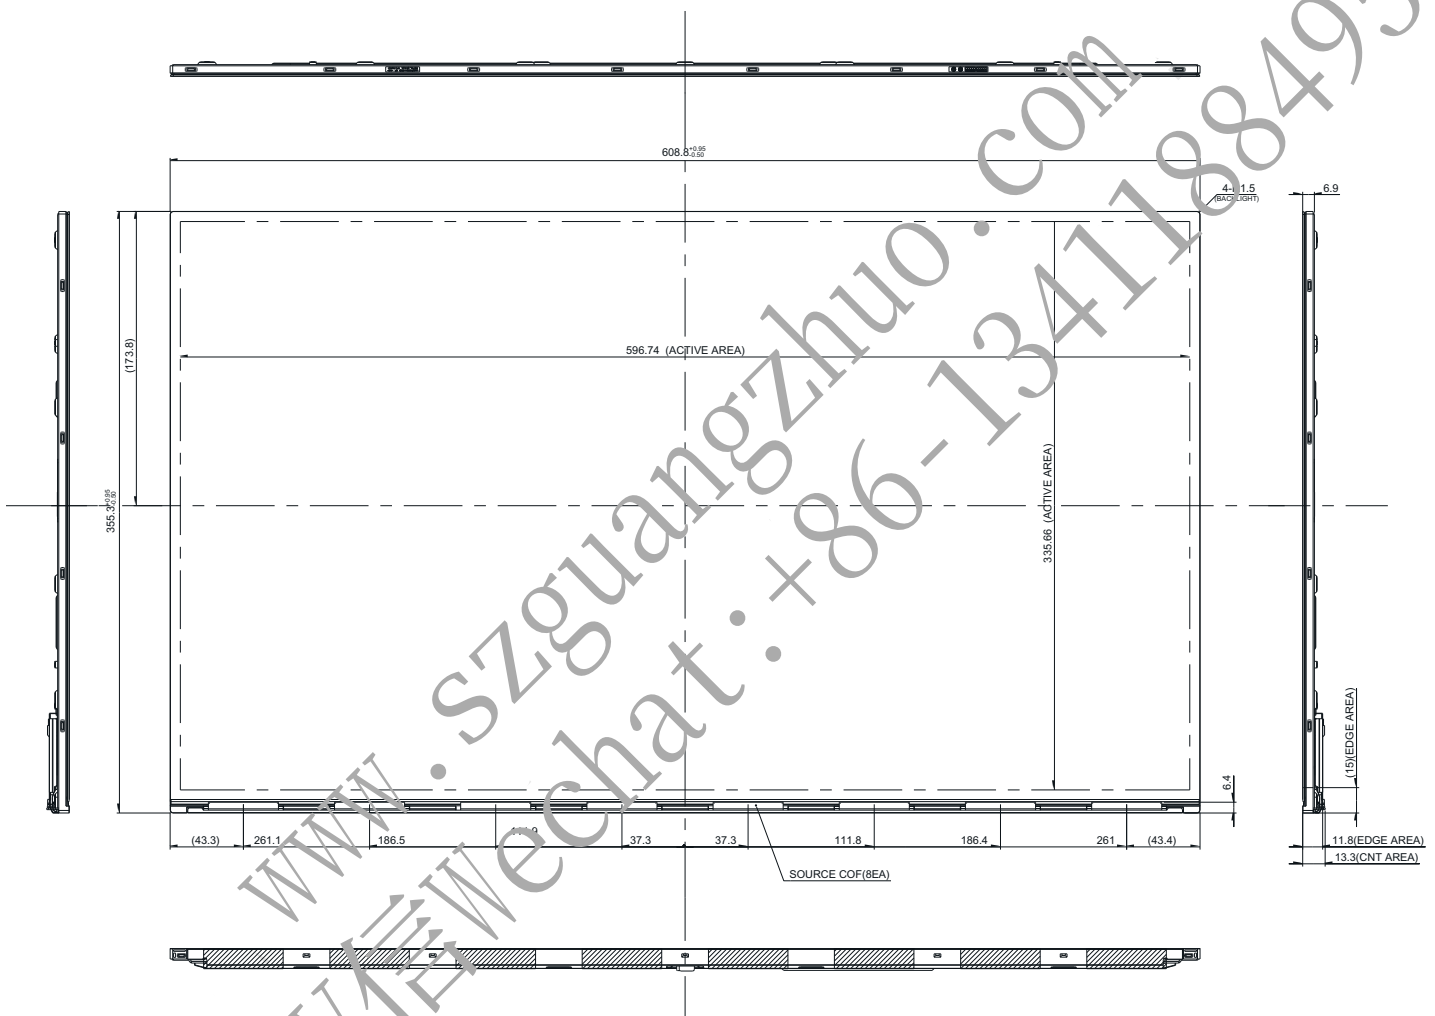
- Outline dimensions (horizontal, vertical and outside depth) are measured by using vernier calipers.
- The inside depth dimensions are measured by using height gauge, when LCM is put face down onto a flat surface.



LM270WQ4
Liquid Crystal Display


Product Specification

<Front View>





Product Specification
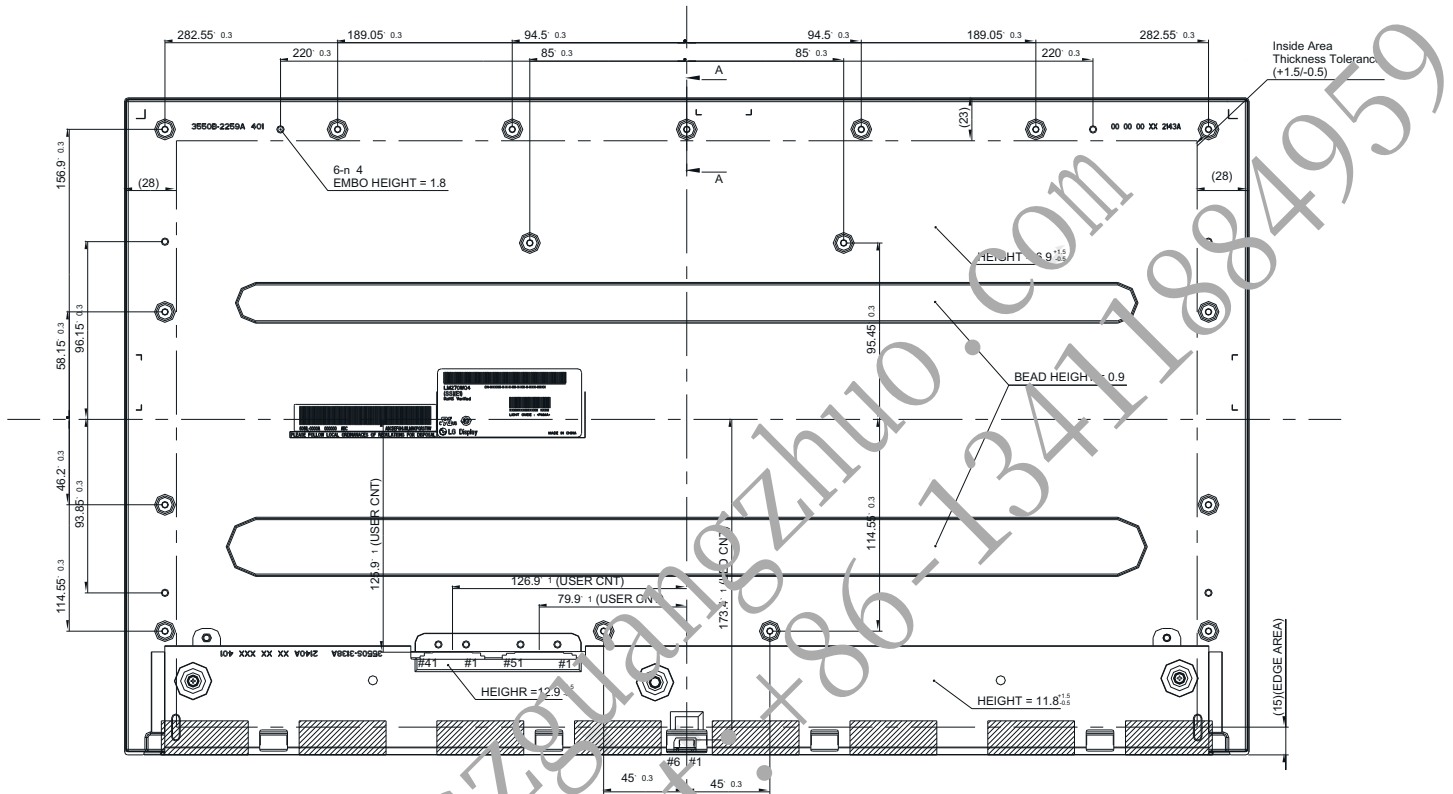
<Rear View>



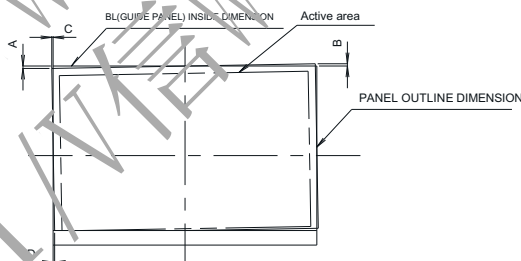- Notes
1. I/F connector specification : FI-EF51S-HF(JAE), FI-EF41S-HF(JAE)
2. LED connector specification : YEONHO, 1003S/MS-H3D or Equivalent
3. Torque of screw hole: 3.0~4.0kgf-cm.
4. Tilt and partial position tolerance of display area as following
- (1) Y-direction : -0.45±0.45, -0.45±0.45
- (2) X-direction : -0.45±0.45, -0.45±0.45



5. Unspecified tolerances to be ± 0.5
6. The LCM warp(warpage) is less than 1.0 on the surface plate
7. The COF area is weak & sensitive, so please don't press the COF area
8. Undefined height should follow the 3D modeling data

LGD Highly recommendation :

System chassis or frame should be designed to keep the IPS Panel flat as it is vulnerable to panel light-leakage caused by deformation.



Product Specification

6. Reliability

Environment test condition

No	Test Item	Condition	Notes
1	High temperature storage test	$T_a = 60^\circ\text{C}$, 240h	1
2	Low temperature storage test	$T_a = -20^\circ\text{C}$, 240h	1
3	High temperature operation test	$T_a = 50^\circ\text{C}$, 50%RH, 240h	1
4	Low temperature operation test	$T_a = 0^\circ\text{C}$, 240h	1
5	Humidity condition operation	$T_a = 40^\circ\text{C}$, 90%RH	1
6	Altitude Operating Storage / Shipment	0 - 10,000 feet (3,048m) 0 - 40,000 feet (12,192m)	
7	Maximum storage humidity for 4 corner light leakage Mura	Max 70%RH, $T_a = 40^\circ\text{C}$	

Note 1) Result Evaluation Criteria:

TFT-LCD panels test should take place after cooling enough at room temperature.

In the standard condition, there should be no particular problems that may affect the display function.

* T_a = Ambient Temperature

7. International Standards

7-1. Safety

- a) IEC 62368-1, The International Electro-technical Commission(IEC).
Audio/video, Information and Communication Technology Equipment - Safety - Safety Requirements.
- b) EN 62368-1, European Committee for Electro-technical Standardization (CENELEC)
Audio/video, Information and Communication Technology Equipment - Safety Requirements
- c) UL 62368-1, UL LLC.
Audio/video, Information and Communication Technology Equipment - Safety Requirements
- d) CAN/CSA C22.2 No.62368-1, Canadian Standards Association (CSA).
Audio/video, Information and Communication Technology Equipment - Safety Requirements
- e) IEC 60950-1, The International Electro technical Commission (IEC).
Information Technology Equipment - Safety - Part 1 : General Requirements

7-2. Environment

- a) RoHS, Directive 2011/65/EU of the European Parliament and of the council of 8 June 2011

Product Specification

8. Packing

8-1. Designation of Lot Mark

a) Lot Mark

A	B	C	D	E	F	G	H	I	J	K	L	M
---	---	---	---	---	---	---	---	---	---	---	---	---

A,B,C: Size(Inch)

E: Month

D: Year

F ~ M: Serial No.

Notes:

1) Year

Year	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020
Mark	A	B	C	D	E	F	G	H	J	I

2) Month

Month	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Mark	1	2	3	4	5	6	7	8	9	A	B	C

b) Location of Lot Mark

Serial No. is printed on the label. The label is attached to the backside of the LCD module.

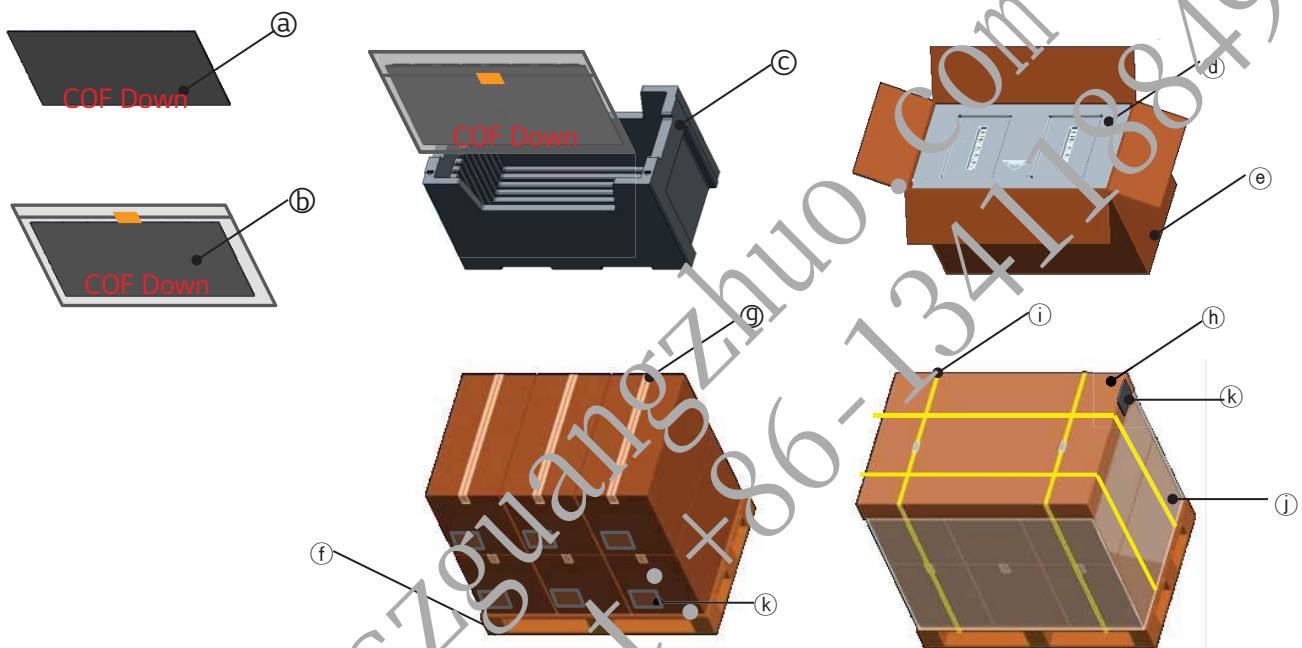
This is subject to change without prior notice.

Product Specification

8-2. Packing Form

- a) Package Quantity In One Box: 10 ea
 Package Quantity In One Pallet: 60 ea
 b) Packing Size: 365 mm x 710 mm x 448 mm
 c) Pallet ASS'Y Size: 1140 mm x 740 mm x 1036 mm

* LCM Direction(Insert to Bottom Packing): COF Down



No.	Description	Material
a	LCM	-
b	AL-Bag	AL
c	Packing,Bottom	EPS
d	Packing,Top	EPS
e	Box	Paper(SW)
f	Pallet	Plywood
g	Tape	OPP
h	Angle Cover	Paper(SW)
i	BAND	PP
j	Wrap	-
k	Label	Yupo

Product Specification

9. Precautions

Please pay attention to the followings when you use this TFT LCD module.

9-1. Mounting Precautions

- 1) You must mount a module using holes arranged in rear side.
- 2) You should consider the mounting structure so that uneven force(ex. Twisted stress) is not applied to the module. And the case on which a module is mounted should have sufficient strength so that external force is not transmitted directly to the module.
- 3) Please attach the surface transparent protective plate to the surface in order to protect the polarizer. Transparent protective plate should have sufficient strength in order to resist external force.
- 4) You should adopt radiation structure to satisfy the temperature specification.
- 5) Acetic acid type and chlorine type materials for the cover case are not desirable because the former generates corrosive gas of attacking the polarizer at high temperature and the latter causes circuit break by electro-chemical reaction.
- 6) Do not touch, push or rub the exposed polarizers with glass, tweezers or anything harder than HB pencil lead. And please do not rub with dust clothes with chemical treatment. Do not touch the surface of polarizer for bare hand or greasy cloth.
(Some cosmetics are detrimental to the polarizer.)
- 7) When the surface becomes dusty, please wipe gently with absorbent cotton or other soft materials like chamois soaked with petroleum benzene. Normal-hexane is recommended for cleaning the adhesives used to attach front / rear alcohol because they cause chemical damage to the polarizer.
- 8) Wipe off saliva or water drops as soon as possible. Their long time contact with polarizer causes deformations and color fading.
- 9) Do not open the case because inside circuits do not have sufficient strength.
- 10) System frame should not have an interference with panel which can cause LC Leakage/Panel Crack due to the contraction of system frame at low temperature condition or panel damage by any other circumstances.

9-2. Operating Precautions

- 1) Response time depends on the temperature.(In lower temperature, it becomes longer.)
- 2) Brightness depends on the temperature.(In higher temperature, it becomes lower.) And in lower temperature, response time(required time that brightness is stable after turned on) becomes longer.
- 3) Be careful for condensation at sudden temperature change. Condensation makes damage to polarizer or electrical contacted parts. And after fading condensation, smear or spot will occur.
- 4) When fixed patterns are displayed for a long time, remnant image is likely to occur.
- 5) Module has high frequency circuits. Sufficient suppression to the electromagnetic interference shall be done by system manufacturers. Grounding and shielding methods may be important to minimize the interference.
- 6) Please do not give any mechanical and/or acoustical impact to LCM. Otherwise, LCM can't be operated its full characteristics perfectly.
- 7) A screw which is fastened to the steels should be a machine screw.(if not, it causes metallic foreign material and deal LCM a fatal blow)
- 8) Please do not set LCD on its edge.
- 9) When LCMs are used for public display, defects such as Yogore & image sticking can not be guaranteed.
- 10) LCMs cannot support "Interlaced Scan Method"
- 11) When this reverse model is used as a forward-type model (PCB on top side) or a Portrait-type mode at storage and operation, LGD can not guarantee any defects of LCM.
- 12) Please conduct image sticking test after 2-hour aging with Rolling Pattern at normal temperature.(25~40℃)

Product Specification

9-3. Electrostatic Discharge Control

Since a module is composed of electronic circuits, it is not strong to electrostatic discharge. Make certain that treatment persons are connected to ground through wrist band etc. And don't touch interface pin directly.

9-4. Precautions For Strong Light and Hazardous Materials Exposure

Strong light exposure causes degradation of polarizer and color filter.

The LCM should be avoided direct contact with hazardous materials such as sulfur, acetic acid, chlorine, etc. These materials may cause chemical reaction such as sulfurization, corrosion, discoloration, etc.

9-5. Storage

When storing modules as spares for a long time, the following precautions are necessary.

- 1) Store them in a dark place. Do not expose the module to sunlight or fluorescent light. Keep the temperature between 5℃ and 35℃ at normal humidity.
- 2) The polarizer surface should not come in contact with any other object.
It is recommended that they be stored in the container in which they were shipped.

9-6. Handling Precautions For Protection Film

- 1) The protection film is attached to the bezel with a small masking tape. When the protection film is peeled off, static electricity is generated between the film and polarizer. This should be peeled off slowly and carefully by people who are electrically grounded and with well ion-blown equipment or in such a condition, etc.
- 2) When the module with protection film attached is stored for a long time, sometimes there remains a very small amount of glue still on the bezel after the protection film is peeled off.
- 3) You can remove the glue easily. When the glue remains on the bezel surface or its vestige is recognized, please wipe them off with absorbent cotton waste or other soft material like chamois soaked with normal-hexane.