

Product Specification

SPECIFICATION FOR APPROVAL

- () Preliminary Specification
(●) Final Specification

TITLE	27.0" QHD TFT LCD
-------	-------------------

BUYER		SUPPLIER	LG Display Co., Ltd.
MODEL		MODEL	LM270WQA
		SUFFIX	SSC3

*When you obtain standard approval,
please use the above model name without suffix

APPROVED BY	SIGNATURE	DATE
_____ /	_____	_____
_____ /	_____	_____
_____ /	_____	_____

Please return 1 copy for your confirmation
with your signature and comments.

APPROVED BY	SIGNATURE	DATE
Sanghoon Lee / G.Manager	<u>Signed, 4/9</u>	
REVIEWED BY		
Jaewon Hyun / Manager [C]	<u>Signed, 4/9</u>	
Changhoon Song / Manager [M]	<u>Signed, 4/9</u>	
Sangho Han / Manager [O]	<u>Signed, 4/9</u>	
Hwije Cho/ Manager [P]	<u>Signed, 4/9</u>	
PREPARED BY		
Hyunchul Jung / Engineer	<u>Signed, 4/9</u>	

Product engineering dept.
LG Display Co., Ltd




Product Specification

Contents

No.	Item	Page
	Cover	1
	Contents	2
	Record of Revisions	3
1	General Description	4
2	Absolute Maximum Ratings	5
3	Electrical Specifications	6
3-1	Electrical Characteristics	6
3-2	Interface Connections	9
3-3	Signal Timing Specifications	16
3-4	Signal Timing Waveforms	17
3-5	Color Data Reference	18
3-6	Power Sequence	19
3-7	Power Dip Condition	20
4	Optical Specifications	21
5	Mechanical Characteristics	25
6	Reliability	28
7	International Standards	29
7-1	Safety	29
7-2	Environment	29
8	Packing	30
8-1	Designation of Lot Mark	30
8-2	Packing Form	31
9	Precautions	32
9-1	Mounting Precautions	32
9-2	Operating Precautions	32
9-3	Electrostatic Discharge Control	33
9-4	Precautions For Strong Light Exposure	33
9-5	Storage	33
9-6	Handling Precautions For Protection Film	33

Product Specification

Record of Revisions

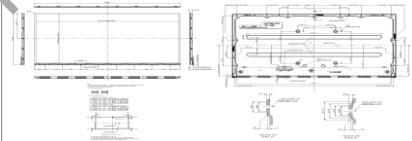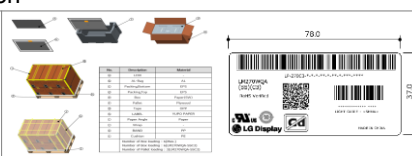Revision No	Revision Date	Page	Before	After	Application Date																																																																																																																																																																																																																																								
0.1	Sep. 7. 2023	-	-	First Draft(Preliminary)	Sep. 7. 2023																																																																																																																																																																																																																																								
0.2	Sep. 20. 2023	4, 6	Update the power consumption <table><thead><tr><th>Parameter</th><th>Symbol</th><th>Min</th><th>Typ</th><th>Max</th><th>Unit</th><th>Notes</th></tr></thead><tbody><tr><td colspan="7">Module:</td></tr><tr><td>Power Supply Input voltage</td><td>V_{in}</td><td>9.5</td><td>10.0</td><td>10.5</td><td>Vdc</td><td>4</td></tr><tr><td>Permissible Power Input Ripple</td><td>V_{max}</td><td>-</td><td>TBD</td><td>400</td><td>mVp-p</td><td>1</td></tr><tr><td>Power Supply Input Current</td><td>I_{in Typ.}</td><td>-</td><td>TBD</td><td>1800</td><td>mA</td><td></td></tr><tr><td></td><td>I_{in White.}</td><td>-</td><td>TBD</td><td>1800</td><td>mA</td><td></td></tr><tr><td></td><td>I_{in Typ.}</td><td>-</td><td>TBD</td><td>1800</td><td>mA</td><td>2</td></tr><tr><td>Power Consumption</td><td>P_{in Typ.}</td><td>-</td><td>TBD</td><td>1800</td><td>mW</td><td>(Q_{in}=14012)</td></tr><tr><td></td><td>P_{in White.}</td><td>-</td><td>TBD</td><td>1800</td><td>mW</td><td></td></tr><tr><td>Power Supply Input Current</td><td>I_{in Typ.}</td><td>-</td><td>TBD</td><td>1800</td><td>mA</td><td></td></tr><tr><td></td><td>I_{in White.}</td><td>-</td><td>TBD</td><td>1800</td><td>mA</td><td></td></tr><tr><td></td><td>I_{in Typ.}</td><td>-</td><td>TBD</td><td>1800</td><td>mA</td><td>2</td></tr><tr><td>Power Consumption</td><td>P_{in Typ.}</td><td>-</td><td>TBD</td><td>1800</td><td>mW</td><td>(Q_{in}=14012)</td></tr><tr><td></td><td>P_{in White.}</td><td>-</td><td>TBD</td><td>1800</td><td>mW</td><td></td></tr></tbody></table>	Parameter	Symbol	Min	Typ	Max	Unit	Notes	Module:							Power Supply Input voltage	V _{in}	9.5	10.0	10.5	Vdc	4	Permissible Power Input Ripple	V _{max}	-	TBD	400	mVp-p	1	Power Supply Input Current	I _{in Typ.}	-	TBD	1800	mA			I _{in White.}	-	TBD	1800	mA			I _{in Typ.}	-	TBD	1800	mA	2	Power Consumption	P _{in Typ.}	-	TBD	1800	mW	(Q _{in} =14012)		P _{in White.}	-	TBD	1800	mW		Power Supply Input Current	I _{in Typ.}	-	TBD	1800	mA			I _{in White.}	-	TBD	1800	mA			I _{in Typ.}	-	TBD	1800	mA	2	Power Consumption	P _{in Typ.}	-	TBD	1800	mW	(Q _{in} =14012)		P _{in White.}	-	TBD	1800	mW		Update the power consumption <table><thead><tr><th>Parameter</th><th>Symbol</th><th>Min</th><th>Typ</th><th>Max</th><th>Unit</th><th>Notes</th></tr></thead><tbody><tr><td colspan="7">Module:</td></tr><tr><td>Power Supply Input voltage</td><td>V_{in}</td><td>9.5</td><td>10.0</td><td>10.5</td><td>Vdc</td><td>4</td></tr><tr><td>Permissible Power Input Ripple</td><td>V_{max}</td><td>-</td><td>TBD</td><td>400</td><td>mVp-p</td><td>1</td></tr><tr><td>Power Supply Input Current</td><td>I_{in Typ.}</td><td>-</td><td>(540)</td><td>(670)</td><td>mA</td><td></td></tr><tr><td></td><td>I_{in White.}</td><td>-</td><td>(540)</td><td>(670)</td><td>mA</td><td></td></tr><tr><td></td><td>I_{in Typ.}</td><td>-</td><td>(540)</td><td>(670)</td><td>mA</td><td>2</td></tr><tr><td>Power Consumption</td><td>P_{in Typ.}</td><td>-</td><td>(540)</td><td>(670)</td><td>mW</td><td>(Q_{in}=14012)</td></tr><tr><td></td><td>P_{in White.}</td><td>-</td><td>(540)</td><td>(670)</td><td>mW</td><td></td></tr><tr><td>Power Supply Input Current</td><td>I_{in Typ.}</td><td>-</td><td>(540)</td><td>(670)</td><td>mA</td><td></td></tr><tr><td></td><td>I_{in White.}</td><td>-</td><td>(540)</td><td>(670)</td><td>mA</td><td></td></tr><tr><td></td><td>I_{in Typ.}</td><td>-</td><td>(540)</td><td>(670)</td><td>mA</td><td>2</td></tr><tr><td>Power Consumption</td><td>P_{in Typ.}</td><td>-</td><td>(540)</td><td>(670)</td><td>mW</td><td>(Q_{in}=14012)</td></tr><tr><td></td><td>P_{in White.}</td><td>-</td><td>(540)</td><td>(670)</td><td>mW</td><td></td></tr></tbody></table>	Parameter	Symbol	Min	Typ	Max	Unit	Notes	Module:							Power Supply Input voltage	V _{in}	9.5	10.0	10.5	Vdc	4	Permissible Power Input Ripple	V _{max}	-	TBD	400	mVp-p	1	Power Supply Input Current	I _{in Typ.}	-	(540)	(670)	mA			I _{in White.}	-	(540)	(670)	mA			I _{in Typ.}	-	(540)	(670)	mA	2	Power Consumption	P _{in Typ.}	-	(540)	(670)	mW	(Q _{in} =14012)		P _{in White.}	-	(540)	(670)	mW		Power Supply Input Current	I _{in Typ.}	-	(540)	(670)	mA			I _{in White.}	-	(540)	(670)	mA			I _{in Typ.}	-	(540)	(670)	mA	2	Power Consumption	P _{in Typ.}	-	(540)	(670)	mW	(Q _{in} =14012)		P _{in White.}	-	(540)	(670)	mW		Sep. 20. 2023																																				
Parameter	Symbol	Min	Typ	Max	Unit	Notes																																																																																																																																																																																																																																							
Module:																																																																																																																																																																																																																																													
Power Supply Input voltage	V _{in}	9.5	10.0	10.5	Vdc	4																																																																																																																																																																																																																																							
Permissible Power Input Ripple	V _{max}	-	TBD	400	mVp-p	1																																																																																																																																																																																																																																							
Power Supply Input Current	I _{in Typ.}	-	TBD	1800	mA																																																																																																																																																																																																																																								
	I _{in White.}	-	TBD	1800	mA																																																																																																																																																																																																																																								
	I _{in Typ.}	-	TBD	1800	mA	2																																																																																																																																																																																																																																							
Power Consumption	P _{in Typ.}	-	TBD	1800	mW	(Q _{in} =14012)																																																																																																																																																																																																																																							
	P _{in White.}	-	TBD	1800	mW																																																																																																																																																																																																																																								
Power Supply Input Current	I _{in Typ.}	-	TBD	1800	mA																																																																																																																																																																																																																																								
	I _{in White.}	-	TBD	1800	mA																																																																																																																																																																																																																																								
	I _{in Typ.}	-	TBD	1800	mA	2																																																																																																																																																																																																																																							
Power Consumption	P _{in Typ.}	-	TBD	1800	mW	(Q _{in} =14012)																																																																																																																																																																																																																																							
	P _{in White.}	-	TBD	1800	mW																																																																																																																																																																																																																																								
Parameter	Symbol	Min	Typ	Max	Unit	Notes																																																																																																																																																																																																																																							
Module:																																																																																																																																																																																																																																													
Power Supply Input voltage	V _{in}	9.5	10.0	10.5	Vdc	4																																																																																																																																																																																																																																							
Permissible Power Input Ripple	V _{max}	-	TBD	400	mVp-p	1																																																																																																																																																																																																																																							
Power Supply Input Current	I _{in Typ.}	-	(540)	(670)	mA																																																																																																																																																																																																																																								
	I _{in White.}	-	(540)	(670)	mA																																																																																																																																																																																																																																								
	I _{in Typ.}	-	(540)	(670)	mA	2																																																																																																																																																																																																																																							
Power Consumption	P _{in Typ.}	-	(540)	(670)	mW	(Q _{in} =14012)																																																																																																																																																																																																																																							
	P _{in White.}	-	(540)	(670)	mW																																																																																																																																																																																																																																								
Power Supply Input Current	I _{in Typ.}	-	(540)	(670)	mA																																																																																																																																																																																																																																								
	I _{in White.}	-	(540)	(670)	mA																																																																																																																																																																																																																																								
	I _{in Typ.}	-	(540)	(670)	mA	2																																																																																																																																																																																																																																							
Power Consumption	P _{in Typ.}	-	(540)	(670)	mW	(Q _{in} =14012)																																																																																																																																																																																																																																							
	P _{in White.}	-	(540)	(670)	mW																																																																																																																																																																																																																																								
0.3	Nov. 29. 2023	16	Update the timing table <table><thead><tr><th>Item</th><th>Symbol</th><th>Symbol</th><th>Min</th><th>Typ</th><th>Max</th><th>Unit</th><th>Notes</th></tr></thead><tbody><tr><td rowspan="5">EOL-4</td><td>Period</td><td>PS-4</td><td>2.45</td><td>3.00</td><td>7.00</td><td>ms</td><td></td></tr><tr><td>Frequency</td><td>FS-4</td><td>120.75</td><td>303.14</td><td>384.62</td><td>Hz</td><td>(Typ. 610.00 Hz)</td></tr><tr><td>Period</td><td>PS-4</td><td>1.400</td><td>1.400</td><td>1.472</td><td>ns</td><td></td></tr><tr><td>Horizontal Voltage</td><td>HS-4</td><td>1.200</td><td>1.200</td><td>1.200</td><td>ns</td><td></td></tr><tr><td>Horizontal Blank</td><td>HB-4</td><td>1.00</td><td>1.00</td><td>1.00</td><td>ns</td><td></td></tr><tr><td rowspan="5">Hsync</td><td>Frequency</td><td>FS</td><td>30.30</td><td>210.72</td><td>270.30</td><td>Hz</td><td>1,2,3,4</td></tr><tr><td>Period</td><td>PS</td><td>33</td><td>33</td><td>33</td><td>ns</td><td></td></tr><tr><td>Horizontal Blank Porch</td><td>HSBP</td><td>64</td><td>64</td><td>128</td><td>ns</td><td></td></tr><tr><td>Period</td><td>PS</td><td>33</td><td>33</td><td>33</td><td>ns</td><td></td></tr><tr><td>Horizontal Front Porch</td><td>HSPF</td><td>1.472</td><td>1.400</td><td>1.176</td><td>ns</td><td>2,4</td></tr><tr><td rowspan="5">Vsync</td><td>Frequency</td><td>FS</td><td>1.472</td><td>1.400</td><td>1.400</td><td>Hz</td><td></td></tr><tr><td>Period</td><td>PS</td><td>67</td><td>67</td><td>67</td><td>ns</td><td></td></tr><tr><td>Horizontal Blank</td><td>HS</td><td>33</td><td>33</td><td>33</td><td>ns</td><td></td></tr><tr><td>Horizontal Front Porch</td><td>HSPF</td><td>1.472</td><td>1.400</td><td>1.176</td><td>ns</td><td></td></tr><tr><td>Horizontal Front Porch</td><td>HSPF</td><td>1.472</td><td>1.400</td><td>1.176</td><td>ns</td><td></td></tr></tbody></table>	Item	Symbol	Symbol	Min	Typ	Max	Unit	Notes	EOL-4	Period	PS-4	2.45	3.00	7.00	ms		Frequency	FS-4	120.75	303.14	384.62	Hz	(Typ. 610.00 Hz)	Period	PS-4	1.400	1.400	1.472	ns		Horizontal Voltage	HS-4	1.200	1.200	1.200	ns		Horizontal Blank	HB-4	1.00	1.00	1.00	ns		Hsync	Frequency	FS	30.30	210.72	270.30	Hz	1,2,3,4	Period	PS	33	33	33	ns		Horizontal Blank Porch	HSBP	64	64	128	ns		Period	PS	33	33	33	ns		Horizontal Front Porch	HSPF	1.472	1.400	1.176	ns	2,4	Vsync	Frequency	FS	1.472	1.400	1.400	Hz		Period	PS	67	67	67	ns		Horizontal Blank	HS	33	33	33	ns		Horizontal Front Porch	HSPF	1.472	1.400	1.176	ns		Horizontal Front Porch	HSPF	1.472	1.400	1.176	ns		Update the timing table <table><thead><tr><th>Item</th><th>Symbol</th><th>Symbol</th><th>Min</th><th>Typ</th><th>Max</th><th>Unit</th><th>Notes</th></tr></thead><tbody><tr><td rowspan="5">EOL-4</td><td>Period</td><td>PS-4</td><td>2.45</td><td>3.00</td><td>7.00</td><td>ms</td><td></td></tr><tr><td>Frequency</td><td>FS-4</td><td>120.75</td><td>303.14</td><td>384.62</td><td>Hz</td><td>(Typ. 610.00 Hz)</td></tr><tr><td>Period</td><td>PS-4</td><td>1.400</td><td>1.400</td><td>1.472</td><td>ns</td><td></td></tr><tr><td>Horizontal Voltage</td><td>HS-4</td><td>1.200</td><td>1.200</td><td>1.200</td><td>ns</td><td></td></tr><tr><td>Horizontal Blank</td><td>HB-4</td><td>1.00</td><td>1.00</td><td>1.00</td><td>ns</td><td></td></tr><tr><td rowspan="5">Hsync</td><td>Frequency</td><td>FS</td><td>30.30</td><td>210.72</td><td>270.30</td><td>Hz</td><td>1,2,3,4</td></tr><tr><td>Period</td><td>PS</td><td>33</td><td>33</td><td>33</td><td>ns</td><td></td></tr><tr><td>Horizontal Blank Porch</td><td>HSBP</td><td>64</td><td>64</td><td>128</td><td>ns</td><td></td></tr><tr><td>Period</td><td>PS</td><td>33</td><td>33</td><td>33</td><td>ns</td><td></td></tr><tr><td>Horizontal Front Porch</td><td>HSPF</td><td>1.472</td><td>1.400</td><td>1.176</td><td>ns</td><td>2,4</td></tr><tr><td rowspan="5">Vsync</td><td>Frequency</td><td>FS</td><td>1.472</td><td>1.400</td><td>1.400</td><td>Hz</td><td></td></tr><tr><td>Period</td><td>PS</td><td>67</td><td>67</td><td>67</td><td>ns</td><td></td></tr><tr><td>Horizontal Blank</td><td>HS</td><td>33</td><td>33</td><td>33</td><td>ns</td><td></td></tr><tr><td>Horizontal Front Porch</td><td>HSPF</td><td>1.472</td><td>1.400</td><td>1.176</td><td>ns</td><td></td></tr><tr><td>Horizontal Front Porch</td><td>HSPF</td><td>1.472</td><td>1.400</td><td>1.176</td><td>ns</td><td></td></tr></tbody></table>	Item	Symbol	Symbol	Min	Typ	Max	Unit	Notes	EOL-4	Period	PS-4	2.45	3.00	7.00	ms		Frequency	FS-4	120.75	303.14	384.62	Hz	(Typ. 610.00 Hz)	Period	PS-4	1.400	1.400	1.472	ns		Horizontal Voltage	HS-4	1.200	1.200	1.200	ns		Horizontal Blank	HB-4	1.00	1.00	1.00	ns		Hsync	Frequency	FS	30.30	210.72	270.30	Hz	1,2,3,4	Period	PS	33	33	33	ns		Horizontal Blank Porch	HSBP	64	64	128	ns		Period	PS	33	33	33	ns		Horizontal Front Porch	HSPF	1.472	1.400	1.176	ns	2,4	Vsync	Frequency	FS	1.472	1.400	1.400	Hz		Period	PS	67	67	67	ns		Horizontal Blank	HS	33	33	33	ns		Horizontal Front Porch	HSPF	1.472	1.400	1.176	ns		Horizontal Front Porch	HSPF	1.472	1.400	1.176	ns		Nov. 29. 2023
Item	Symbol	Symbol	Min	Typ	Max	Unit	Notes																																																																																																																																																																																																																																						
EOL-4	Period	PS-4	2.45	3.00	7.00	ms																																																																																																																																																																																																																																							
	Frequency	FS-4	120.75	303.14	384.62	Hz	(Typ. 610.00 Hz)																																																																																																																																																																																																																																						
	Period	PS-4	1.400	1.400	1.472	ns																																																																																																																																																																																																																																							
	Horizontal Voltage	HS-4	1.200	1.200	1.200	ns																																																																																																																																																																																																																																							
	Horizontal Blank	HB-4	1.00	1.00	1.00	ns																																																																																																																																																																																																																																							
Hsync	Frequency	FS	30.30	210.72	270.30	Hz	1,2,3,4																																																																																																																																																																																																																																						
	Period	PS	33	33	33	ns																																																																																																																																																																																																																																							
	Horizontal Blank Porch	HSBP	64	64	128	ns																																																																																																																																																																																																																																							
	Period	PS	33	33	33	ns																																																																																																																																																																																																																																							
	Horizontal Front Porch	HSPF	1.472	1.400	1.176	ns	2,4																																																																																																																																																																																																																																						
Vsync	Frequency	FS	1.472	1.400	1.400	Hz																																																																																																																																																																																																																																							
	Period	PS	67	67	67	ns																																																																																																																																																																																																																																							
	Horizontal Blank	HS	33	33	33	ns																																																																																																																																																																																																																																							
	Horizontal Front Porch	HSPF	1.472	1.400	1.176	ns																																																																																																																																																																																																																																							
	Horizontal Front Porch	HSPF	1.472	1.400	1.176	ns																																																																																																																																																																																																																																							
Item	Symbol	Symbol	Min	Typ	Max	Unit	Notes																																																																																																																																																																																																																																						
EOL-4	Period	PS-4	2.45	3.00	7.00	ms																																																																																																																																																																																																																																							
	Frequency	FS-4	120.75	303.14	384.62	Hz	(Typ. 610.00 Hz)																																																																																																																																																																																																																																						
	Period	PS-4	1.400	1.400	1.472	ns																																																																																																																																																																																																																																							
	Horizontal Voltage	HS-4	1.200	1.200	1.200	ns																																																																																																																																																																																																																																							
	Horizontal Blank	HB-4	1.00	1.00	1.00	ns																																																																																																																																																																																																																																							
Hsync	Frequency	FS	30.30	210.72	270.30	Hz	1,2,3,4																																																																																																																																																																																																																																						
	Period	PS	33	33	33	ns																																																																																																																																																																																																																																							
	Horizontal Blank Porch	HSBP	64	64	128	ns																																																																																																																																																																																																																																							
	Period	PS	33	33	33	ns																																																																																																																																																																																																																																							
	Horizontal Front Porch	HSPF	1.472	1.400	1.176	ns	2,4																																																																																																																																																																																																																																						
Vsync	Frequency	FS	1.472	1.400	1.400	Hz																																																																																																																																																																																																																																							
	Period	PS	67	67	67	ns																																																																																																																																																																																																																																							
	Horizontal Blank	HS	33	33	33	ns																																																																																																																																																																																																																																							
	Horizontal Front Porch	HSPF	1.472	1.400	1.176	ns																																																																																																																																																																																																																																							
	Horizontal Front Porch	HSPF	1.472	1.400	1.176	ns																																																																																																																																																																																																																																							
0.4	Jan. 9. 2024	4, 6	Update the power consumption <table><thead><tr><th>Parameter</th><th>Symbol</th><th>Min</th><th>Typ</th><th>Max</th><th>Unit</th><th>Notes</th></tr></thead><tbody><tr><td colspan="7">Module:</td></tr><tr><td>Power Supply Input voltage</td><td>V_{in}</td><td>9.5</td><td>10.0</td><td>10.5</td><td>Vdc</td><td>4</td></tr><tr><td>Permissible Power Input Ripple</td><td>V_{max}</td><td>-</td><td>TBD</td><td>400</td><td>mVp-p</td><td>1</td></tr><tr><td>Power Supply Input Current</td><td>I_{in Typ.}</td><td>-</td><td>(540)</td><td>(670)</td><td>mA</td><td></td></tr><tr><td></td><td>I_{in White.}</td><td>-</td><td>(540)</td><td>(670)</td><td>mA</td><td></td></tr><tr><td></td><td>I_{in Typ.}</td><td>-</td><td>(540)</td><td>(670)</td><td>mA</td><td>2</td></tr><tr><td>Power Consumption</td><td>P_{in Typ.}</td><td>-</td><td>(540)</td><td>(670)</td><td>mW</td><td>(Q_{in}=14012)</td></tr><tr><td></td><td>P_{in White.}</td><td>-</td><td>(540)</td><td>(670)</td><td>mW</td><td></td></tr><tr><td>Power Supply Input Current</td><td>I_{in Typ.}</td><td>-</td><td>(540)</td><td>(670)</td><td>mA</td><td></td></tr><tr><td></td><td>I_{in White.}</td><td>-</td><td>(540)</td><td>(670)</td><td>mA</td><td></td></tr><tr><td></td><td>I_{in Typ.}</td><td>-</td><td>(540)</td><td>(670)</td><td>mA</td><td>2</td></tr><tr><td>Power Consumption</td><td>P_{in Typ.}</td><td>-</td><td>(540)</td><td>(670)</td><td>mW</td><td>(Q_{in}=14012)</td></tr><tr><td></td><td>P_{in White.}</td><td>-</td><td>(540)</td><td>(670)</td><td>mW</td><td></td></tr></tbody></table>	Parameter	Symbol	Min	Typ	Max	Unit	Notes	Module:							Power Supply Input voltage	V _{in}	9.5	10.0	10.5	Vdc	4	Permissible Power Input Ripple	V _{max}	-	TBD	400	mVp-p	1	Power Supply Input Current	I _{in Typ.}	-	(540)	(670)	mA			I _{in White.}	-	(540)	(670)	mA			I _{in Typ.}	-	(540)	(670)	mA	2	Power Consumption	P _{in Typ.}	-	(540)	(670)	mW	(Q _{in} =14012)		P _{in White.}	-	(540)	(670)	mW		Power Supply Input Current	I _{in Typ.}	-	(540)	(670)	mA			I _{in White.}	-	(540)	(670)	mA			I _{in Typ.}	-	(540)	(670)	mA	2	Power Consumption	P _{in Typ.}	-	(540)	(670)	mW	(Q _{in} =14012)		P _{in White.}	-	(540)	(670)	mW		Update the power consumption <table><thead><tr><th>Parameter</th><th>Symbol</th><th>Min</th><th>Typ</th><th>Max</th><th>Unit</th><th>Notes</th></tr></thead><tbody><tr><td colspan="7">Module:</td></tr><tr><td>Power Supply Input voltage</td><td>V_{in}</td><td>9.5</td><td>10.0</td><td>10.5</td><td>Vdc</td><td>4</td></tr><tr><td>Permissible Power Input Ripple</td><td>V_{max}</td><td>-</td><td>TBD</td><td>400</td><td>mVp-p</td><td>1</td></tr><tr><td>Power Supply Input Current</td><td>I_{in Typ.}</td><td>-</td><td>(540)</td><td>(670)</td><td>mA</td><td></td></tr><tr><td></td><td>I_{in White.}</td><td>-</td><td>(540)</td><td>(670)</td><td>mA</td><td></td></tr><tr><td></td><td>I_{in Typ.}</td><td>-</td><td>(540)</td><td>(670)</td><td>mA</td><td>2</td></tr><tr><td>Power Consumption</td><td>P_{in Typ.}</td><td>-</td><td>(540)</td><td>(670)</td><td>mW</td><td>(Q_{in}=14012)</td></tr><tr><td></td><td>P_{in White.}</td><td>-</td><td>(540)</td><td>(670)</td><td>mW</td><td></td></tr><tr><td>Power Supply Input Current</td><td>I_{in Typ.}</td><td>-</td><td>(540)</td><td>(670)</td><td>mA</td><td></td></tr><tr><td></td><td>I_{in White.}</td><td>-</td><td>(540)</td><td>(670)</td><td>mA</td><td></td></tr><tr><td></td><td>I_{in Typ.}</td><td>-</td><td>(540)</td><td>(670)</td><td>mA</td><td>2</td></tr><tr><td>Power Consumption</td><td>P_{in Typ.}</td><td>-</td><td>(540)</td><td>(670)</td><td>mW</td><td>(Q_{in}=14012)</td></tr><tr><td></td><td>P_{in White.}</td><td>-</td><td>(540)</td><td>(670)</td><td>mW</td><td></td></tr></tbody></table>	Parameter	Symbol	Min	Typ	Max	Unit	Notes	Module:							Power Supply Input voltage	V _{in}	9.5	10.0	10.5	Vdc	4	Permissible Power Input Ripple	V _{max}	-	TBD	400	mVp-p	1	Power Supply Input Current	I _{in Typ.}	-	(540)	(670)	mA			I _{in White.}	-	(540)	(670)	mA			I _{in Typ.}	-	(540)	(670)	mA	2	Power Consumption	P _{in Typ.}	-	(540)	(670)	mW	(Q _{in} =14012)		P _{in White.}	-	(540)	(670)	mW		Power Supply Input Current	I _{in Typ.}	-	(540)	(670)	mA			I _{in White.}	-	(540)	(670)	mA			I _{in Typ.}	-	(540)	(670)	mA	2	Power Consumption	P _{in Typ.}	-	(540)	(670)	mW	(Q _{in} =14012)		P _{in White.}	-	(540)	(670)	mW		Jan. 9. 2024																																				
Parameter	Symbol	Min	Typ	Max	Unit	Notes																																																																																																																																																																																																																																							
Module:																																																																																																																																																																																																																																													
Power Supply Input voltage	V _{in}	9.5	10.0	10.5	Vdc	4																																																																																																																																																																																																																																							
Permissible Power Input Ripple	V _{max}	-	TBD	400	mVp-p	1																																																																																																																																																																																																																																							
Power Supply Input Current	I _{in Typ.}	-	(540)	(670)	mA																																																																																																																																																																																																																																								
	I _{in White.}	-	(540)	(670)	mA																																																																																																																																																																																																																																								
	I _{in Typ.}	-	(540)	(670)	mA	2																																																																																																																																																																																																																																							
Power Consumption	P _{in Typ.}	-	(540)	(670)	mW	(Q _{in} =14012)																																																																																																																																																																																																																																							
	P _{in White.}	-	(540)	(670)	mW																																																																																																																																																																																																																																								
Power Supply Input Current	I _{in Typ.}	-	(540)	(670)	mA																																																																																																																																																																																																																																								
	I _{in White.}	-	(540)	(670)	mA																																																																																																																																																																																																																																								
	I _{in Typ.}	-	(540)	(670)	mA	2																																																																																																																																																																																																																																							
Power Consumption	P _{in Typ.}	-	(540)	(670)	mW	(Q _{in} =14012)																																																																																																																																																																																																																																							
	P _{in White.}	-	(540)	(670)	mW																																																																																																																																																																																																																																								
Parameter	Symbol	Min	Typ	Max	Unit	Notes																																																																																																																																																																																																																																							
Module:																																																																																																																																																																																																																																													
Power Supply Input voltage	V _{in}	9.5	10.0	10.5	Vdc	4																																																																																																																																																																																																																																							
Permissible Power Input Ripple	V _{max}	-	TBD	400	mVp-p	1																																																																																																																																																																																																																																							
Power Supply Input Current	I _{in Typ.}	-	(540)	(670)	mA																																																																																																																																																																																																																																								
	I _{in White.}	-	(540)	(670)	mA																																																																																																																																																																																																																																								
	I _{in Typ.}	-	(540)	(670)	mA	2																																																																																																																																																																																																																																							
Power Consumption	P _{in Typ.}	-	(540)	(670)	mW	(Q _{in} =14012)																																																																																																																																																																																																																																							
	P _{in White.}	-	(540)	(670)	mW																																																																																																																																																																																																																																								
Power Supply Input Current	I _{in Typ.}	-	(540)	(670)	mA																																																																																																																																																																																																																																								
	I _{in White.}	-	(540)	(670)	mA																																																																																																																																																																																																																																								
	I _{in Typ.}	-	(540)	(670)	mA	2																																																																																																																																																																																																																																							
Power Consumption	P _{in Typ.}	-	(540)	(670)	mW	(Q _{in} =14012)																																																																																																																																																																																																																																							
	P _{in White.}	-	(540)	(670)	mW																																																																																																																																																																																																																																								
1.0	Apr. 9. 2024	26, 27	Update the mechanical drawing 	Update the mechanical drawing 	Apr. 9. 2024																																																																																																																																																																																																																																								
		11, 34	Update the packing and label information 	Update the packing and label information 																																																																																																																																																																																																																																									

Product Specification

1. General Description

LM270WQA-SSC3 is a color active matrix liquid crystal display with a Light Emitting Diode(LED) backlight assembly without LED driver. The matrix employs a-Si thin film transistor as the active element. It is a transmissive type display operating in the normally black mode. It has a 27 inch diagonally measured active display area with QHD resolution(2560 horizontal by 1440 vertical pixel array). Each pixel is divided into red, green and blue sub-pixels or dots which are arranged in vertical stripes. Gray scale or the brightness of the sub-pixel color is determined with a 10-bit gray scale signal for each dot, thus, presenting a palette of more than 1.07 Billion colors with A-FRC (Advanced Frame Rate Control). It has been designed to apply eDP(HBR2, 5.4Gbps) interface. It is intended to support displays where high brightness, super wide viewing angle, high color saturation, and high color are important.

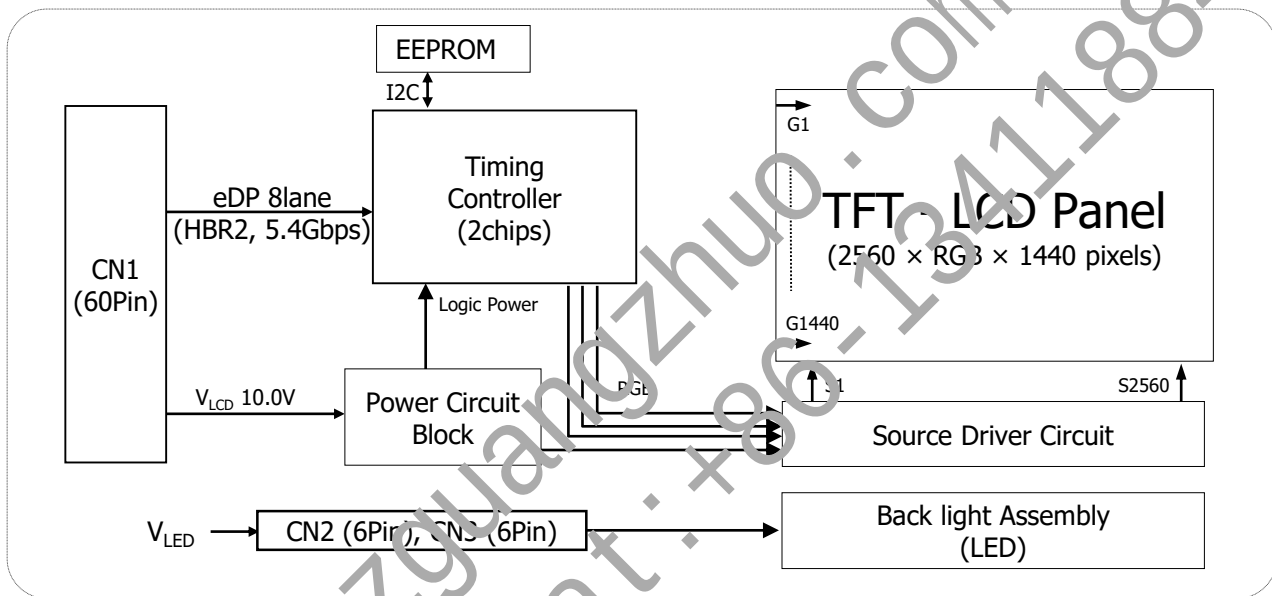


FIG.1 Block Diagram

General Features

Active Screen Size	27 inches(68.5 cm)(Aspect ratio 16:9)
Outline Dimension	608.8(H) x 355.1(V) x 15.2(D) mm(Typ.)
Pixel Pitch	0.2331(H) x 0.2331(V) mm
Pixel Format	2560(H) x 1440(V) Pixels. RGB stripes arrangement.
Color Depth	1.07 Billion colors, 10Bit (8Bit+A-FRC)
Luminance, White	400 cd/m ² (Center 1Point, Typ.)
Viewing Angle(CR>10)	R/L 178° (Typ.), U/D 178° (Typ.)
Power Consumption	Total 37.2Watt (Typ.)(5.9Watt@ Mosaic_V _{LCD} , 31.3Watt@ Is=85mA)
Weight	2,550g (Typ.)
Display Operating Mode	Transmissive mode, Normally black (IPS)
Panel type	Reverse type
BLU Type	Edge Type
Surface Treatment	Anti-Glare treatment of the front polarizer(Haze25%, 3H)

Product Specification

2. Absolute Maximum Ratings

The following are maximum values which, if exceeded, may cause faulty operation or damage to the unit.

Table 2-1. Absolute Maximum Ratings

Parameter	Symbol	Values		Units	Notes
		Min	Max		
Power Supply Input Voltage	V_{LCD}	-0.3	+12.0	V_{DC}	At 25°C
Operating Temperature	T_{OP}	0	50	°C	
Storage Temperature	T_{ST}	-20	60	°C	
Operating Ambient Humidity	H_{OP}	10	90	%RH	1,2,3
Storage Humidity	H_{ST}	10	90	%RH	
Glass Surface Temperature(Operation)	$T_{surface}$	0	48	°C	1,4

Notes:

- 1) Temperature and relative humidity range are shown in the figure below.
Wet bulb temperature should be 39°C Max, and no condensation of water.
- 2) Storage condition is guaranteed under packing condition.
- 3) Glass surface temperature should be measured under the condition of $V_{LCD} = \text{Typ}$, $f_V = 144\text{Hz}$, $T_a = 25^\circ\text{C}$, no humidity and typical LED string current.

* f_V = Frame frequency
* T_a = Ambient temperature

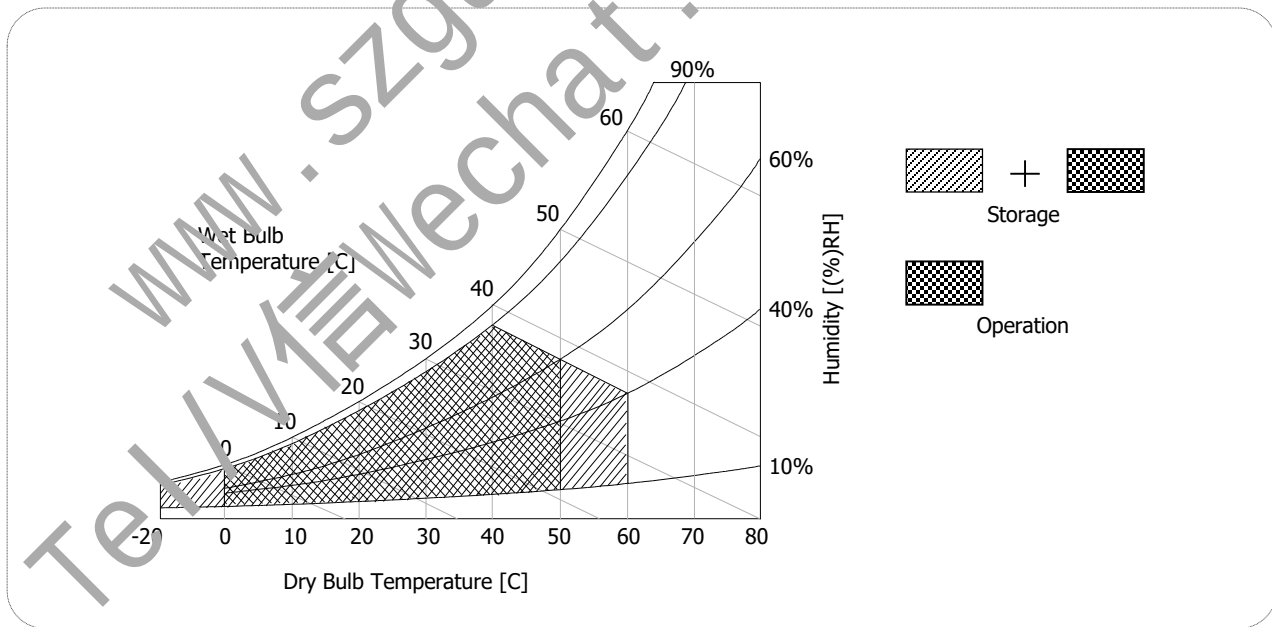


FIG.2 Temperature And Relative Humidity

Product Specification

3. Electrical Specifications

3-1. Electrical Characteristics

It requires two power inputs. One is employed to power the LCD electronics and to drive the TFT array and liquid crystal. The other input power for the LED/Backlight, is typically generated by a LED Driver. The LED Driver is an external unit to the LCDs.

Table 3-1. Electrical Characteristics

Parameter	Symbol	Values			Unit	Notes
		Min	Typ	Max		
Module:						
Power Supply Input voltage	V _{LCD}	9.5	10.0	10.5	V _{dc}	4
Permissive Power Input Ripple	V _{RIPPLE}	-		400	mVp-p	1
Power Supply Input Current	I _{LCD} Typ.	-	500	740	mA	2 (f _v =144Hz)
	I _{LCD} Max.	-	1170	1461	mA	
	I _{LCD} White.	-	600	750	mA	
Power Consumption	P _{LCD} Typ.	-	5.90	7.40	W	2 (f _v =144Hz)
	P _{LCD} Max.	-	11.70	14.65	W	
	P _{LCD} White.	-	6.00	7.50	W	
Power Supply Input Current	I _{LCD} Typ.	-	650	815	mA	2 (f _v =180Hz)
	I _{LCD} Max.	-	1365	1700	mA	
	I _{LCD} White.	-	660	825	mA	
Power Consumption	P _{LCD} Typ.	-	6.50	8.15	W	2 (f _v =180Hz)
	P _{LCD} Max.	-	13.65	17.00	W	
	P _{LCD} White.	-	6.60	8.25	W	
Rush Current	I _{RUSH}	-	-	4.0	A	3


Notes:

- 1) Permissive power ripple should be measured under the condition of $V_{LCD} = \text{Typ}$, $25 \pm 2^\circ\text{C}$, $f_V = \text{Max}$. Refer to page 7 for the pattern and more information.
- 2) The specified current and power consumption can be measured under the $V_{LCD} = \text{Typ}$, $25 \pm 2^\circ\text{C}$, and the pattern should be changed according to the typical or maximum power condition. The max. current can be measured only with the maximum power pattern. See the page 7 for details.
- 3) a) maximum condition of inrush current:
The duration of rush current is about 5ms and rising time of power input is $500\mu\text{s} \pm 20\%$.(Min).
b) V_{LCD} level must be measured between two points on PCB of LCM V_{LCD} (test point) ~ LCM Ground.
(Test condition: Maximum power pattern, 25°C , $f_V = 144Hz$)

- f_V = Frame frequency

Product Specification


- **Permissive Power Input Ripple**($V_{LCD} = \text{Typ}$, 25°C , $f_V(\text{frame frequency}) = \text{Max condition}$)

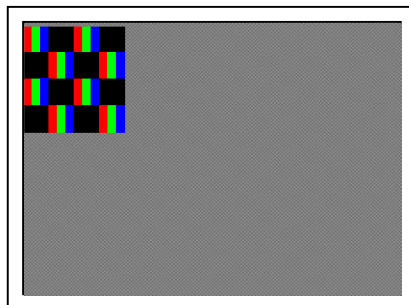


**Maximum power pattern
(1dot)**

For the exact ripple measurement, the condition of Max 20MHz is recommended in the bandwidth configuration of oscilloscope.


- **Power Consumption**($V_{LCD} = \text{Typ}$, 25°C , $f_V(\text{frame frequency}) = 144\text{Hz}$ and 180Hz condition)

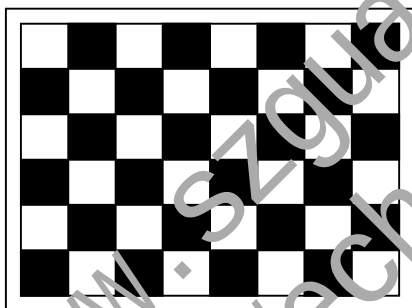

Typical Power Pattern

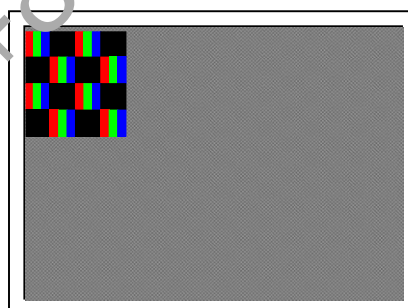

**Maximum power pattern
(1dot)**



White Power Pattern

FIG.3-1 Pattern For Power Consumption Measurement

Product Specification

Table 3-2. LED Bar Electrical Characteristics

Parameter	Symbol	Values			Unit	Notes
		Min	Typ	Max		
LED String Current	Is	-	85	90	mA	1,2
LED String Voltage	Vs	44.4	46.0	47.6	V	1,2
Power Consumption	PBar	-	31.3	32.4	Watt	2,3
LED Life Time	LED_LT	30,000	-	-	Hrs	4

Note: The LED consists of 64 LED packages, 8 strings(parallel) x 8 packages(serial) x 1 bar

Notes:

- 1) The specified values are for single LED bar.
- 2) The specified current is defined as the input current for single LED string with 100% duty cycle.
- 3) The specified voltage is the input LED string voltage at typical current 100% duty cycle.
- 4) The LED life time is defined as the when brightness of LED itself reach to the 50% of initial value under the conditions at $T_a = 25 \pm 2^\circ\text{C}$ and typical LED string current.
- 5) The power consumption shown above does not include the loss of external LED driver.
The typical power consumption is calculated as $P_{\text{bar}} = V_s(\text{Typ.}) \times I_s(\text{Typ.}) \times \text{No. of strings}$.
The maximum power consumption is calculated as $P_{\text{bar}} = V_s(\text{Max.}) \times I_s(\text{Typ.}) \times \text{No. of strings}$.

Table 3-2-1. Absolute Maximum Values of LED Bar and Peak Luminance

Parameter	Symbol	Values	Unit	Notes
Peak LED String Current	Is	110	mA	1,2
Peak Luminance	Lp	500	nit	1,2

Notes:

- 1) Peak LED string voltage at peak current with 100% duty cycle is $46.9 \pm 1.6 \text{ V}$ at $T_a = 25 \pm 2^\circ\text{C}$.
- 2) Peak luminance 500nit is achieved at (110mA), while the specifications for guarantee remains under the normal operating condition specified in Table 3-2. Specifications and condition for evaluation test and mass production shall be applied with conditions specified in Table 3-2.

Product Specification

3-2. Interface Connections

3-2-1. LCD Module



- LCD Connector(Receptacle): 20525-060E-01(Manufactured by I-PEX)
- Mating Connector(Plug): 20523-060T(Manufactured by I-PEX)

Table 3-3. Module Connector(CN1) Pin Configuration

No	Symbol	Description	No	Symbol	Description
1	GND	Ground	31	DP0_L1_N	Master Component Signal for Main Link 1
2	V _{LCD}	Power Supply +10.0V	32	GND	Ground
3	V _{LCD}	Power Supply +10.0V	33	DP0_L2_P	Master True Signal for Main Link 1
4	V _{LCD}	Power Supply +10.0V	34	DP0_L2_N	Master Component Signal for Main Link 2
5	V _{LCD}	Power Supply +10.0V	35	GND	Ground
6	V _{LCD}	Power Supply +10.0V	36	DP0_L3_P	Master True Signal for Main Link 3
7	V _{LCD}	Power Supply +10.0V	37	DP0_L3_N	Master Component Signal for Main Link 3
8	V _{LCD}	Power Supply +10.0V	38	GND	Ground
9	V _{LCD}	Power Supply +10.0V	39	DP1_L0_P	Slave True Signal for Main Link 0
10	GND	Ground	40	DP1_L0_N	Slave Component Signal for Main Link 0
11	GND	Ground	41	GND	Ground
12	GND	Ground	42	DP1_L1_P	Slave True Signal for Main Link 1
13	GND	Ground	43	DP1_L1_N	Slave Component Signal for Main Link 1
14	GND	Ground	44	GND	Ground
15	GND	Ground	45	DP1_L2_P	Slave True Signal for Main Link 2
16	GND	Ground	46	DP1_L2_N	Slave Component Signal for Main Link 2
17	GND	Ground	47	GND	Ground
18	GND	Ground	48	DP1_L3_P	Slave True Signal for Main Link 3
19	NC	No Connection(I2C serial interface for LCM)	49	DP1_L3_N	Slave Component Signal for Main Link 3
20	NC	No Connection(I2C serial interface for LCM)	50	GND	Ground
21	DP0_HPD	Master Hot Plug Detect Signal	51	DP1_AUX_P	Slave True Signal for Auxiliary Channel
22	DP1_HPD	Slave Hot Plug Detect Signal	52	DP1_AUX_N	Slave Component Signal for Auxiliary Channel
23	GND	Ground	53	GND	Ground
24	DP0_AUX_P	Master True Signal for Auxiliary Channel	54	NC	No Connection(I2C serial interface for LCM)
25	DP0_AUX_N	Master Component Signal for Auxiliary Channel	55	NC	No Connection(I2C serial interface for LCM)
26	GND	Ground	56	NC	No Connection
27	DP0_L0_P	Master True Signal for Main Link 0	57	GND	Ground
28	DP0_L0_N	Master Component Signal for Main Link 0	58	NC	No Connection
29	GND	Ground	59	GND	Ground
30	DP0_L1_P	Master True signal for Main Link 1	60	NC	No Connection

Notes:

- 1) All GND(ground) pins should be connected together to the LCD module's metal frame.
- 2) All V_{LCD}(power input) pins should be connected together.

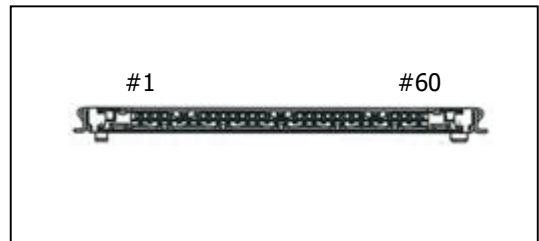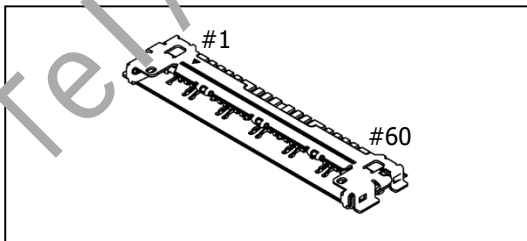


20525-060E-01(I-PEX)

Rear view of LCM

Product Specification

3-2-2. eDP Signal Specifications

1. eDP Main Link Signal

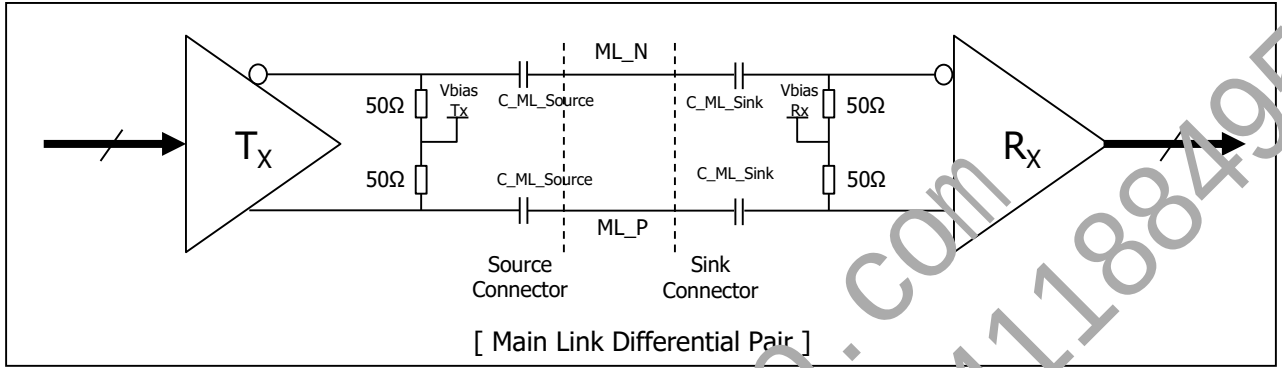


Parameter	Symbol	Min	Typ	Max	Unit	Notes
Unit Interval for High Bit Rate (5.4Gbps / Lane)	UI_HBR2	-	185	-	ps	
Link Clock Down Spreading	Amplitude	0	-	0.5	%	
	Frequency	30	-	35	kHz	
Maximum Output Voltage Level at Source Side Connector	$V_{TX-DIFF-p-p}$	-	-	1.38	V	6
Differential Peak to peak Voltage at Sink Side Connector	$V_{RX-DIFF-p-p}$	0.09	-	-	V	7
EYE width at Sink Side Connector	$T_{RX-EYE-OPEN}$	0.38	-	-	UI	6,7
Lane Intra-pair Skew	$L_{RX-SKEW-INTRA-PAIR}$	-	-	50	ps	
Master Tx to Slave Tx Skew	$T_{TX-to-TX_skew}$	-	-	± 0.25	DE	8
AC Coupling Capacitor	$C_{SOURCE-ML}$	75	-	200	nF	Source side

Notes:


- 1) In cabled embedded system, it is recommended the system designer ensure that EYE width and voltage are met at the sink side connector pins.
- 2) Mismatched common mode voltage will occur abnormal display.
- 3) All eDP electrical spec is measured at sink connector side.

Product Specification

Note 6) Definition of Differential Voltage

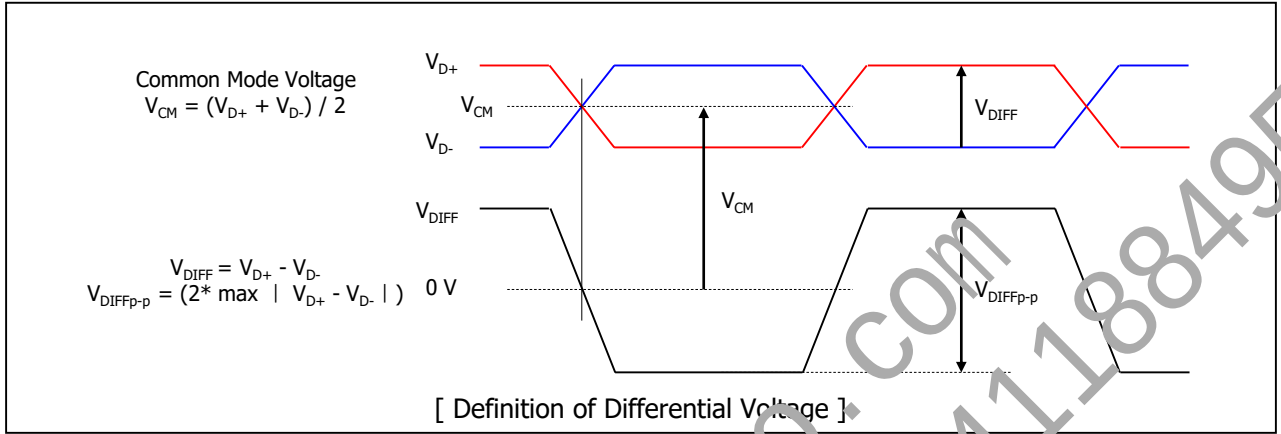

Note 7) Main Link EYE Diagram

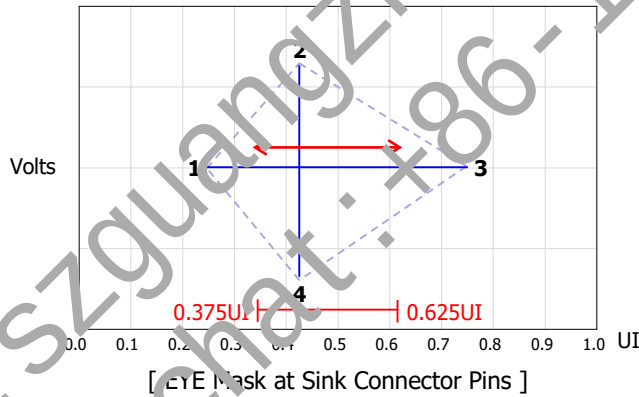


Point	High Bit Rate 2 @ TP3 EQ	
	Time(UI)	Voltage(V)
1	Any UI location (x) where the eye width is open from x to x + 0.38UI	0.000
2	Any passing UI location between 0.375UI - 0.625UI	0.045
3	Point 1 + 0.38UI	0.000
4	Same as Point 2	-0.045

[EYE Mask Vertices at embedded DP Sink Connector Pins]


Product Specification

Note 8) Master Tx to Slave Tx Skew Margin Case

(1) +0.25 DE Skew Case

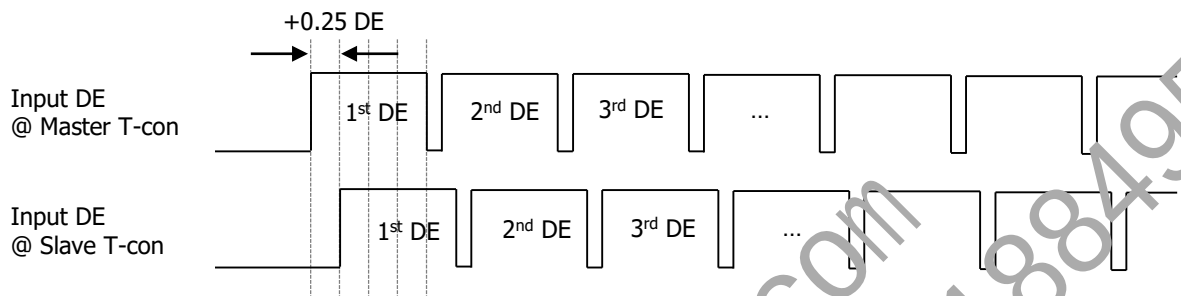


(2) -0.25 DE Skew Case

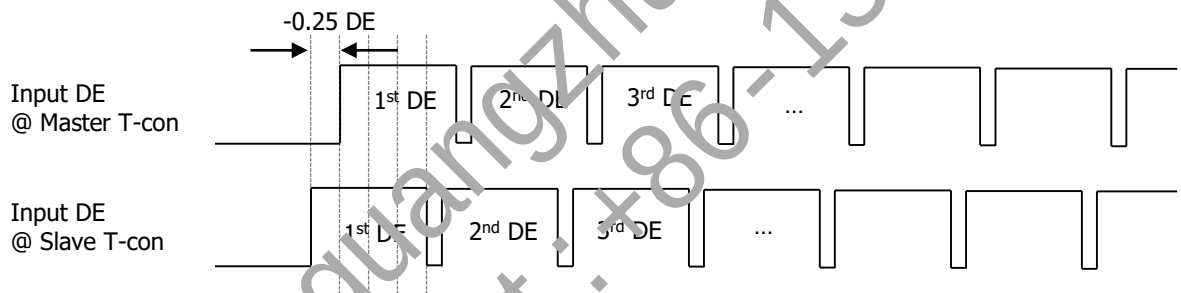

Product Specification

2. eDP AUX Channel Signal

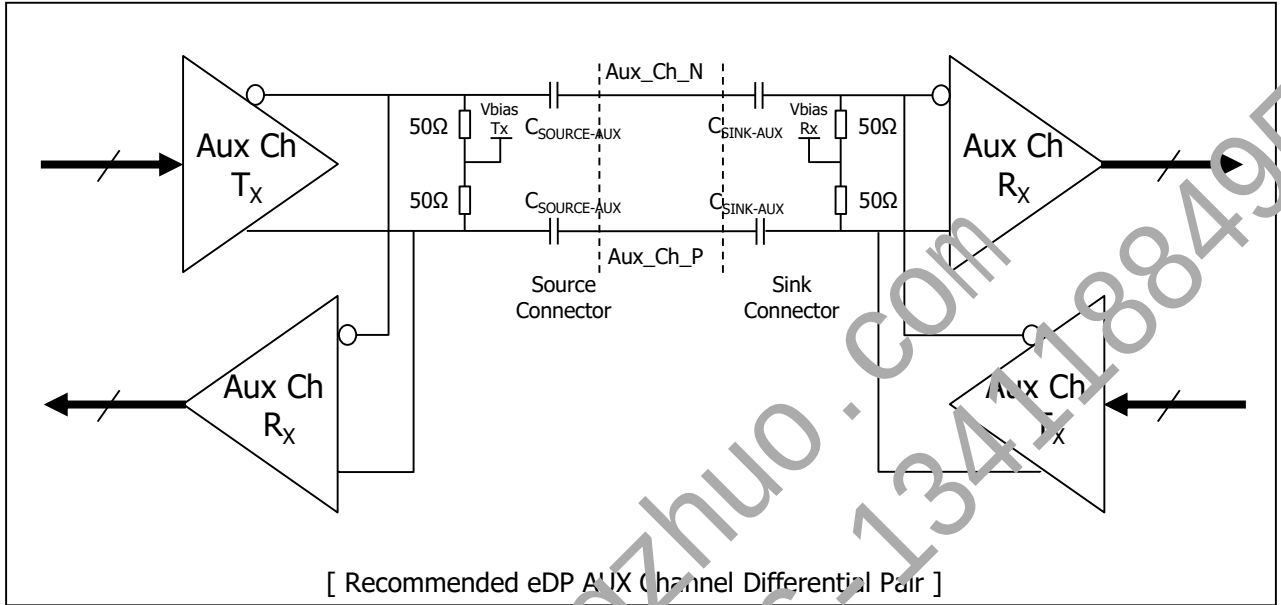


Parameter	Symbol	Min	Typ	Max	Unit	Notes
AUX Unit Interval	UI	0.4	-	0.6	us	
AUX Jitter at Rx IC Package Pins	jitter	-	-	0.05	UI	Equal to 30ns
AUX Peak-to-peak Voltage at Connector Pins of Receiving	$V_{AUX-DIFFp-p}$	0.32	-	1.36	V	
AUX Peak-to-peak Voltage at Connector Pins of Transmitting		0.39	-	1.38	V	
AUX EYE width at Connector Pins of Tx and Rx		0.98	-	-	UI	
AUX AC Coupling Capacitor	$C_{SOURCE-AUX}$	75	-	200	nF	Source side

Notes:

- $V_{AUX-DIFFp-p} = 2 * |V_{AUXN} - V_{AUXN}|$
- Termination resistor should be 50ohm $\pm$ 5% at source side to AUX level.
- Mismatched common mode voltage will occur abnormal display.

Product Specification

3. eDP HDP Signal

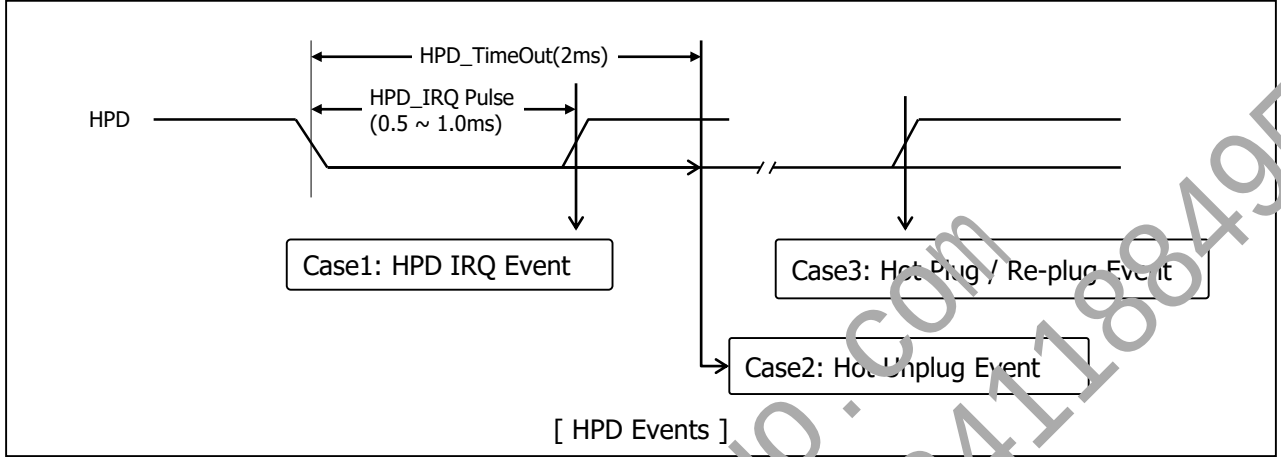

Parameter	Symbol	Min	Typ	Max	Unit	Notes
HPD Voltage	HPD	2.25	-	3.6	V	Sink side Driving
Hot Plug Detection Threshold		2.0	-	-	V	Source side Detecting
Hot Unplug Detection Threshold		-	-	0.8	V	
HPD_IRQ Pulse Width	HPD_IRQ	0.5	-	1.0	ms	
HPD_TimeOut		2.0	-	-	ms	HPD Unplug Event

Notes:

- 1) HPD IRQ: Sink device wants to notify the Source device that Sink's status has changed so it toggles HPD line, forcing the Source device to read its Link / Sink Receiver DPCD field via the AUX-CH.
- 2) HPD Unplug: The Sink device is no longer attached to the Source device and the Source device may then disable its Main Link as a power saving mode.
- 3) Plug / Re-plug: The Sink device is now attached to the Source device, forcing the Source device to read its Receiver capabilities and Link / Sink status Receiver DPCD fields via the AUX-CH.

Product Specification

3-2-3. Backlight Connector Pin Configuration

The LED interface connector is a 10035WS-H06D(HF)_wire-locking type manufactured by YEONHO.
The mating connector is a SHJP-06V-S(HF) or 10035HS-H06C(HF).
The pin configuration for the connector is shown in the table below.

Table 3-4. LED Connector Pin Configuration

Pin	Symbol	Pin-description (CN2)	Remark	Pin	Symbol	Pin-description (CN3)	Remark
#1	FB4	Channel 4 current feedback	Left side in front view	#1	FB4	Channel 4 current feedback	Right side in front view
#2	FB3	Channel 3 current feedback		#2	FB3	Channel 3 current feedback	
#3	V LED	LED power supply (common anode)		#3	V LED	LED power supply (common anode)	
#4	V LED	LED power supply (common anode)		#4	V LED	LED power supply (common anode)	
#5	FB2	Channel 2 current feedback		#5	FB2	Channel 2 current feedback	
#6	FB1	Channel 1 current feedback		#6	FB1	Channel 1 current feedback	

[Rear view of LCM]

[Front view of LCM]

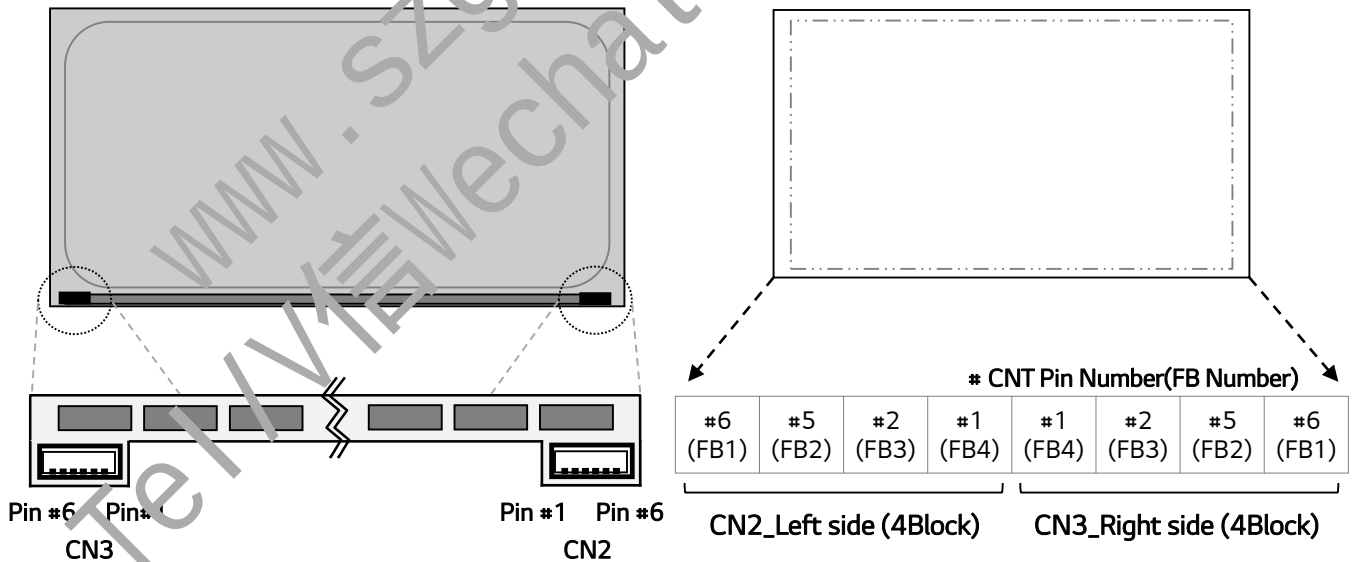


FIG.3-2 Backlight Connector View

Product Specification

3-3. Signal Timing Specifications

This is the signal timing requirement from the signal transmitter. All of the interface signal timing should be satisfied with the following specifications for its proper operation.

Table 3-5. Timing Table


Item	Symbol	Symbol	Min	Typ	Max	Unit	Notes
DCLK	Period	tCLK	2.50	3.28	9.85	ns	Pixel frequency (Typ. 610.28 MHz)
	Frequency	fCLK	101.56	305.14	400.37	MHz	
Hsync	Period	tHP	1,408	1,408	1,472	tCLK	1,3,4
	Horizontal Valid	tHV	1,280	1,280	1,280	tCLK	
	Horizontal Blank	tHB	128	128	192	tCLK	
	Frequency	fH	90.30	216.72	270.90	kHz	
	Width	tWH	32	32	32	tCLK	
	Horizontal Back Porch	tHBP	64	64	128	tCLK	
	Horizontal Front Porch	tHFP	32	32	32	tCLK	
Vsync	Period	tVP	1,475	1,505	6,051	tHP	2,4 *Adaptive sync: 47~181Hz
	Vertical Valid	tVV	1,440	1,440	1,440	tHP	
	Vertical Blank	tVB	35	65	4,611	tHP	
	Frequency	fV	47	144	181	Hz	
	Width	tWV	5	5	5	tHP	
	Vertical Back Porch	tVBP	27	57	4,603	tHP	
	Vertical Front Porch	tVFP	3	3	3	tHP	

Notes:

- 1) The value of Hsync Period, Hsync Width and Hsync valid should be even number times of tCLK. If the value is odd number times of tCLK, it can make asynchronous signal timing and cause abnormal display.
- 2) The performance of the electro-optical characteristics may be influenced by variance of the vertical refresh rates.
- 3) The value of Hsync Period, Hsync Width, and Horizontal Back Porch should be divided by 4 without a remainder.
- 4) The polarity of Hsync, Vsync is not restricted.
- 5) The optimal Vertical Frequency is 60~180Hz (normal mode frequency) for best picture quality.

Product Specification

3-4. Signal Timing Waveforms

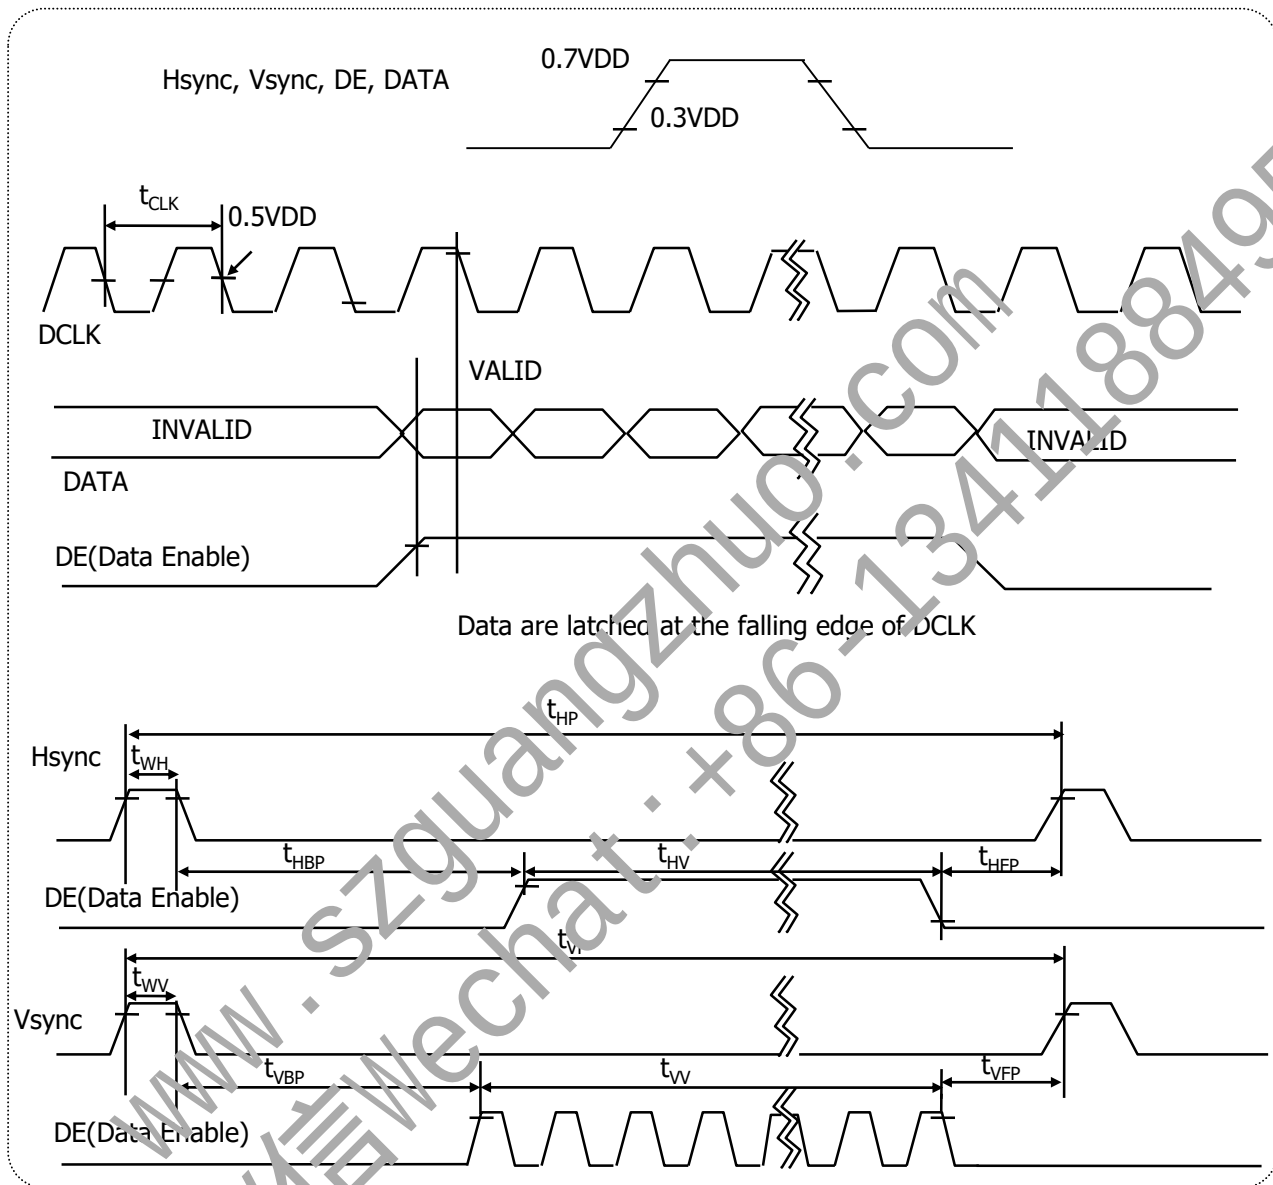

Product Specification

3-5. Color Data Reference

The Brightness of each primary color(Red,Green,Blue) is based on the 10-bit gray scale data input for the color; the higher the binary input, the brighter the color.
The table below provides a reference for color versus data input.

Table 3-6. Color Data Reference

Color		Input Color Data																																			
		RED										GREEN										BLUE															
		MSB					LSB					MSB					LSB					MSB						LSB									
		R9	R8	R7	R6	R5	R4	R3	R2	R1	R0	G9	G8	G7	G6	G5	G4	G3	G2	G1	G0	B9	B8	B7	B6	B5	B4	B3	B2	B1	B0						
Basic Color	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0				
	Red (1023)	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0				
	Green (1023)	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0				
	Blue (1023)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1				
	Cyan	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1				
	Magenta	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1				
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0				
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1				
RED	RED (0)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0				
	RED (1)	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0				
	...																																				
	RED (1022)	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0				
	RED (1023)	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0				
GREEN	GREEN (0)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0				
	GREEN (1)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0				
	...																																				
	GREEN (1022)	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0				
	GREEN (1023)	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0				
BLUE	BLUE (0)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0				
	BLUE (1)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1				
	...																																				
	BLUE (1022)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	0				
	BLUE (1023)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1				

Product Specification

3-6. Power Sequence

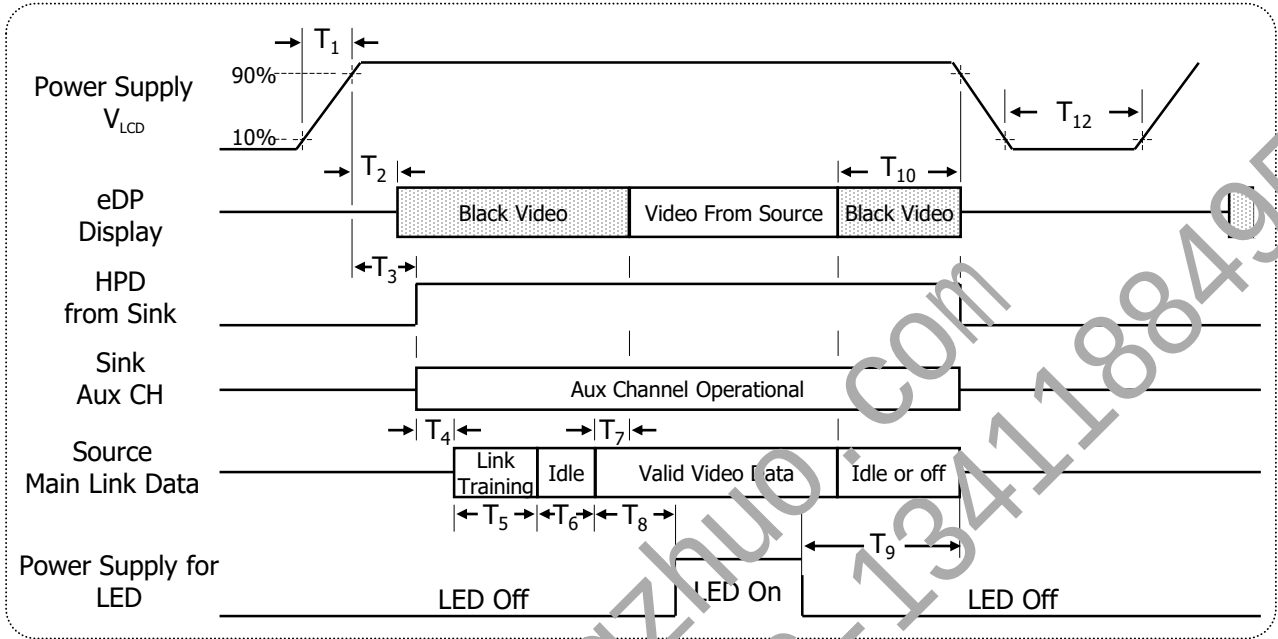


Table 3-7. Power Sequence

Timing	Required By	Limits		Units	Notes
		Min	Max		
T_1	Source	0.5	10	ms	
T_2	Sink	10	200	ms	
T_3	Sink	15	20	ms	
T_4	Source	-	-	ms	5
T_5	Source	-	-	ms	5
T_6	Source	-	100	ms	6
T_7	Source	350	-	ms	
T_8	Source	200	-	ms	4

Timing	Required By	Limits		Units	Notes
		Min	Max		
T_{10}	Source	0	500	ms	
T_{12}	Source	1000	-	ms	

Notes:

- Power sequence should be kept all the time including below cases for normal operation.
 - AC/DC Power On/Off
 - Mode change (resolution, frequency, timing, sleep mode, color depth change, etc.)
 The violation of power sequence can cause a significant trouble in display and reliability.
- Please avoid floating state of interface signal during signal invalid period.
- When the interface signal is invalid, be sure to pull down the V_{LCD} (0V).
- Please turn off the power supply for LED when the level of V_{LCD} changes to prevent noise issue.
- Link training duration is dependent on the customer's system.
- It includes Source Frame Synchronization time.
 - Source Frame Synchronization: Time to prepare before Tx(Source) sends valid data(Invalid period).

Product Specification

3-7. Power Dip Condition

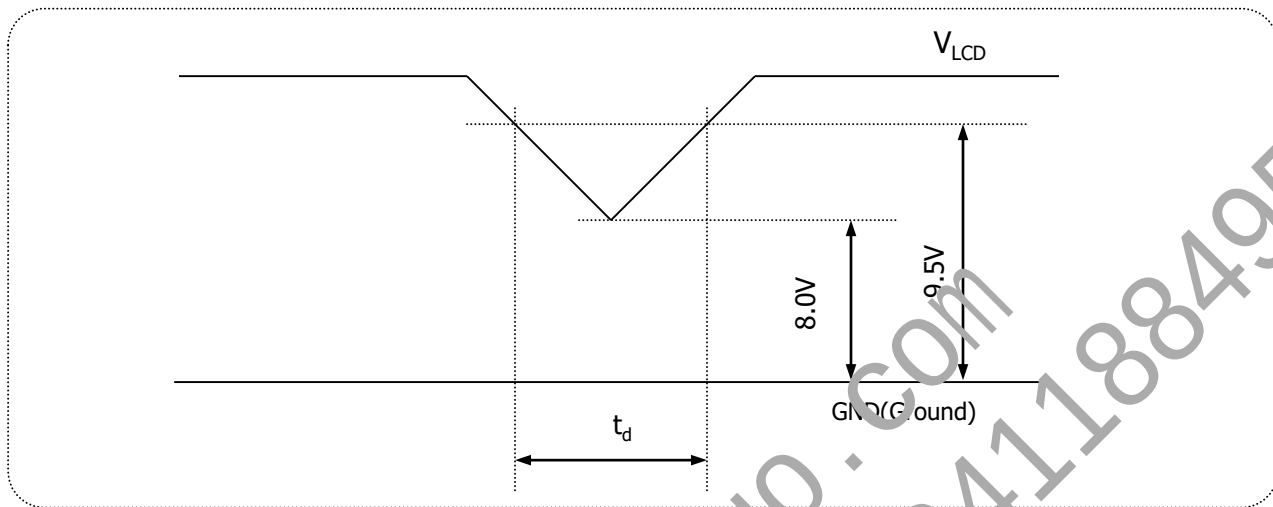


FIG.3-3 Power Dip Condition

For proper operation, stable power supply of V_{LCD} is necessary and power dip is allowed only in below condition. Except this condition, power on/off should follow power sequence specification exactly.

1) Dip Condition

$$8.0V \leq V_{LCD} < 9.5V, t_d \leq 20ms$$

Product Specification

4. Optical Specifications

Optical characteristics are determined after the unit has been 'ON' for approximately 30 minutes in a dark environment at $25 \pm 2^\circ\text{C}$. The values specified are at an approximate distance 50cm from the LCD surface at a viewing angle of Φ and θ equal to 0° and aperture 1 degree.

FIG.4-1 presents additional information concerning the measurement equipment and method.

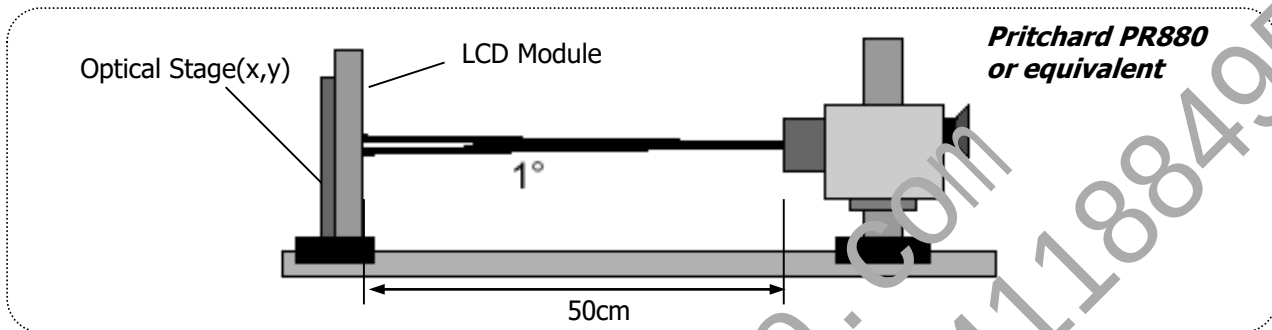


FIG.4-1 Optical Characteristic Measurement Equipment And Method

Table 4-1. Optical Characteristics

($T_a = 25^\circ\text{C}$, $V_{\text{LCD}} = \text{Typ}$, $f_v = 144\text{Hz}$, $\text{DCLK} = \text{Typ}$, $I_s = \text{Typ}$)

Parameter		Symbol	Values			Units	Notes
			Min.	Typ.	Max.		
Contrast Ratio		CR	700	1000	-		1
Surface Luminance, white		L _{WH}	320	400	-	cd/m²	2
Luminance Variation		δ _{WHITE}	75	-	-	%	3
Response Time	Gray to Gray	T _{GTS-VR}	-	4	8	ms	4
Color Gamut (CIE 1976)		DCI	90	98	-	%	
Color Coordinates [CIE 1931] (By PR650)	Red	R _x	Typ -0.03	0.686	Typ +0.03		
		R _y		0.309			
	Green	G _x		0.265			
		G _y		0.668			
	Blue	B _x		0.150			
		B _y		0.058			
	White	W _x		0.313			
		W _y		0.329			
Color Temperature		-	-	6500	-	K	
Viewing Angle (CR>10, General)	Horizontal	θ _H	170	178	-	Degree	5
	Vertical	θ _V	170	178	-		
Gray Scale		-		2.2			6

Product Specification

Notes:

- 1) **Contrast Ratio(CR)** is defined mathematically as: **(By PR880)**

It is measured at center point(1)

$$\text{Contrast ratio} = \frac{\text{Surface luminance with all white pixels}}{\text{Surface luminance with all black pixels}}$$


- 2) **Surface Luminance(L_{WH})** is the luminance value at center 1 point(1) across the LCD surface 50cm from the surface with all pixels displaying white. For more information see FIG.4-1. **(By PR880)**

- 3) The **Variation in Surface Luminance** , δ_{WHITE} is defined as: **(By PR880)**

$$\delta_{\text{WHITE}} = \frac{\text{Minimum}(LP_1, LP_2, \dots, LP_9)}{\text{Maximum}(LP_1, LP_2, \dots, LP_9)} \times 100(\%)$$

Where L1 to L9 are the luminance with all pixels displaying white at 9 locations.
For more information see FIG.4-2.

<Measuring Point For Luminance Variation>

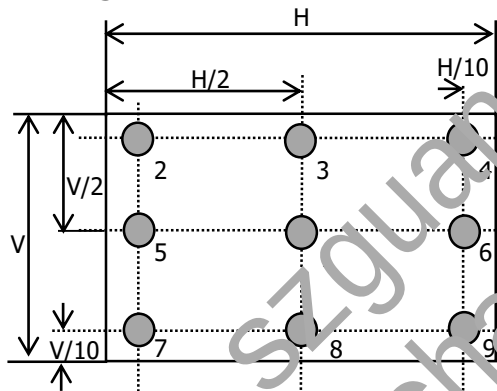

@ H.V. Active Area

<Measuring Point For Surface Luminance>

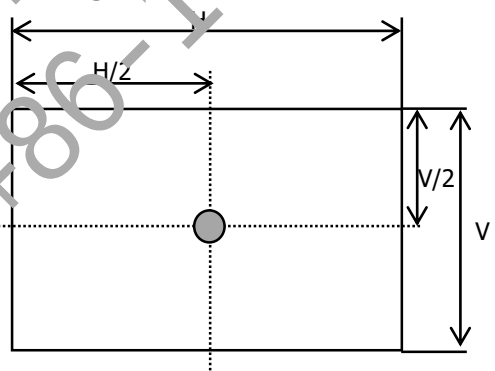


FIG.4-2 Measure Point for Luminance

Product Specification

Notes:

- 4) The **Gray To Gray Response Time** is defined as the following figure and shall be measured by switching the input signal for "Gray To Gray". (**By RD80S**)
 - Gray step: 5 Step
 - $T_{GTG\ AVR}$ is the total average time at rising time and falling time for "Gray To Gray".
 - For the GTG measurement, the sampling rate of oscilloscope is 500k/s.

Table 4-2. GTG Gray

Gray to Gray		Rising Time				
		G1023	G767	G511	G255	G0
Falling Time	G1023					
	G767					
	G511					
	G255					
	G0					

Response Time is defined as the following figure and shall be measured by switching the input signal for "Gray(N)" and "Gray(M)".

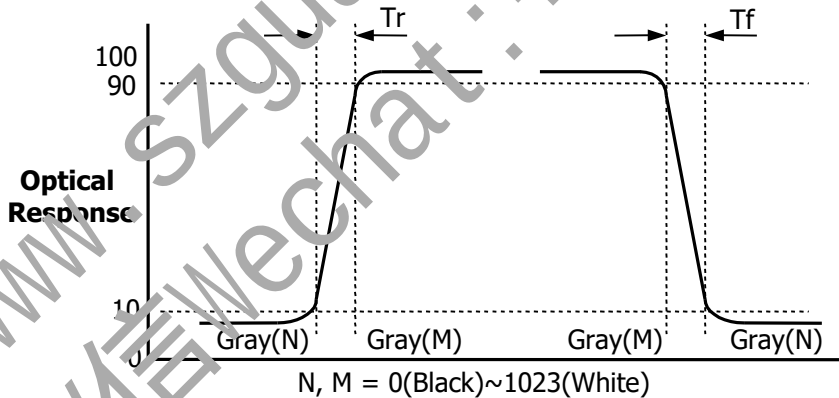


FIG.4-3 Response Time

Product Specification

Notes:

- 5) **Viewing Angle** is the angle at which the contrast ratio is greater than 10. The angles are determined for the horizontal or x axis and the vertical or y axis with respect to the z axis which is normal to the LCD surface. For more information see FIG.4-4. **(By PR880)**

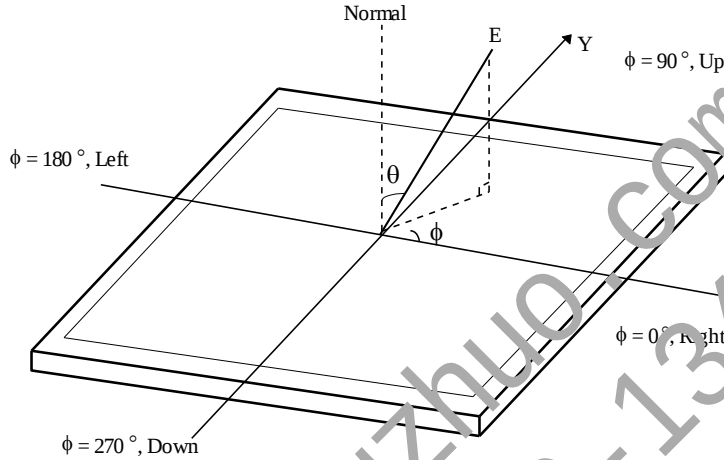


FIG 4-4 Viewing Angle

- 6) **Gamma Value** is approximately 2.2. For more information see below table.

Table 4-3. Gray Scale Specification

Gray Level	Relative Luminance [%](Typ)
0	0.10
63	0.30
127	1.08
191	2.50
255	4.72
319	7.70
383	11.49
447	16.20
511	21.66
575	28.20
639	35.45
703	43.80
767	53.00
831	63.30
895	74.48
959	86.80
1023	100

Product Specification

5. Mechanical Characteristics

The contents provide general mechanical characteristics. In addition the figures in the next page are detailed mechanical drawing of the LCD.


Outline Dimension	Horizontal	608.80 mm
	Vertical	355.10 mm
	Depth	15.20 mm
Bezel Area	Horizontal	-
	Vertical	-
Active Display Area	Horizontal	596.74 mm
	Vertical	335.66 mm
Weight	Typ. : 2,550g, Max. : 2,680g	
Surface Treatment	Anti-Glare treatment of the front polarizer(Haze25%, 3H)	

Note: Please refer to a mechanical drawing in terms of tolerance at the next page.

- Outline dimensions (horizontal, vertical and outside depth) are measured by using vernier calipers.
- The inside depth dimensions are measured by using height gauge, when LCM is put face down onto a flat surface.

Product Specification


<Front View>

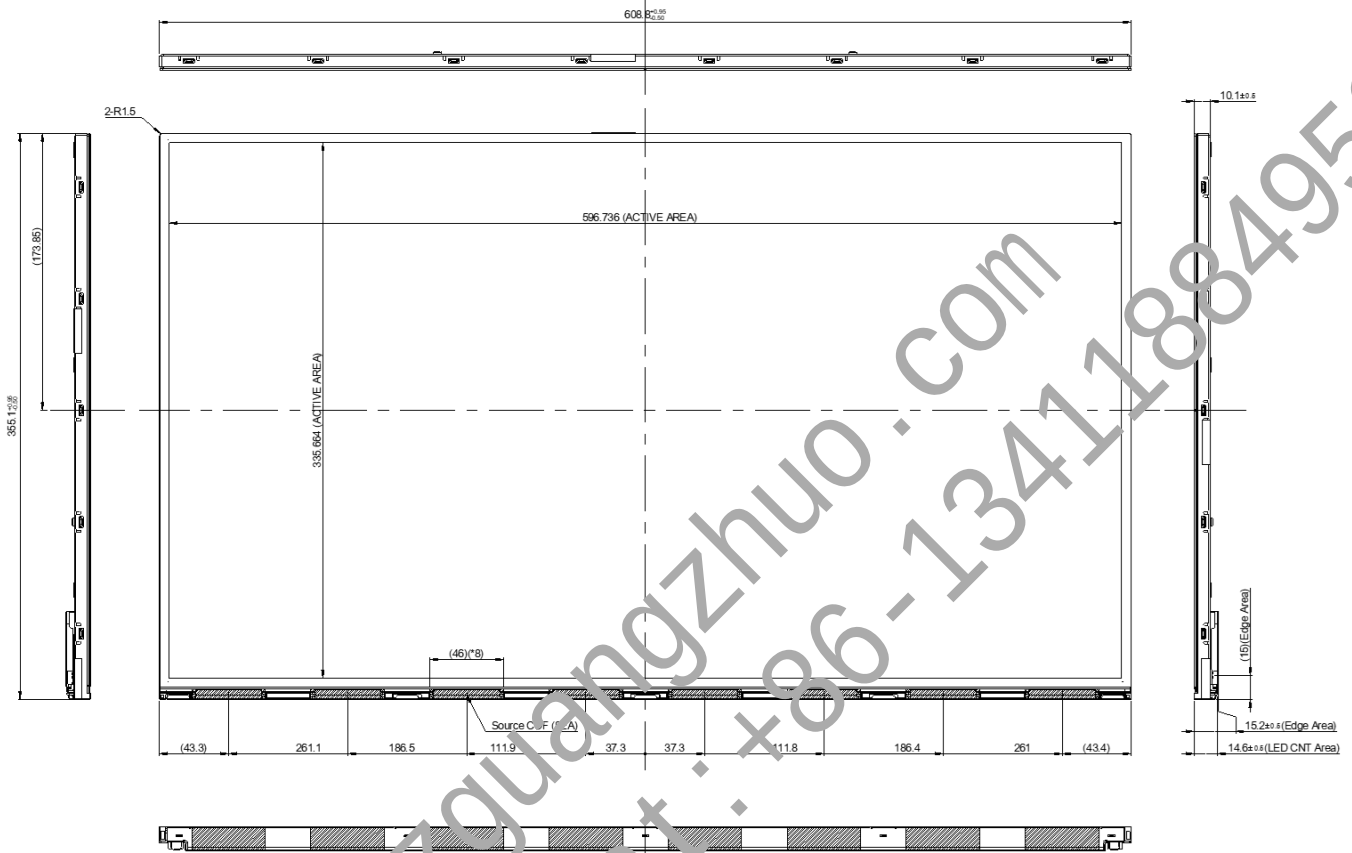

Notes

1. IF connector specification : 20525-060E-01(Manufactured by I-PEX) or Equivalent
2. LED connector specification : YEONHO, 10035WS-H06D or Equivalent
3. Torque of screw hole: 3.0~4.0kgf-cm.

1. Tilt Value definition




4-2. Tilt Specifications

~ [Case 1] Line ① (Based on B/L)

Position	Typ	Tolerance	Range
(2),(5)	-0.12	±0.45	-0.57~+0.33
(3),(4)	-0.13	±0.45	-0.58~+0.32
(1),(6)	-0.22	±0.45	-0.67~+0.23

~ [Case 2] Line ② (Based on S/A)

Position	Typ	Tolerance	Range
(2),(5)	0	±0.45	-0.45~+0.45
(3),(4)	0	±0.45	-0.45~+0.45
(1),(6)	0	±0.45	-0.45~+0.45



< Measurement Point: (1)~(6) >

5. Unspecified tolerances to be ± 0.5
6. The LCM warp(warpage) is less than 1.0 on the surface plate
7. The COF area is weak & sensitive, so please don't press the COF area
8. Undefined height should follow the 3D modeling data

Product Specification

<Rear View>



LGD Highly recommendation :

System chassis or frame should be designed to keep the IPS Panel flat as it is vulnerable to panel light-leakage caused by deformation.

Product Specification

6. Reliability

Environment test condition

No	Test Item	Condition	Notes
1	High temperature storage test	$T_a = 60^{\circ}\text{C}$, 240h	1
2	Low temperature storage test	$T_a = -20^{\circ}\text{C}$, 240h	1
3	High temperature operation test	$T_a = 50^{\circ}\text{C}$, 50%RH, 240h	1
4	Low temperature operation test	$T_a = 0^{\circ}\text{C}$, 240h	1
5	Vibration test (non-operating)	Waveform : Random Vibration level : 1-150rms Bandwidth : 10-1000Hz Duration : X,Y,Z, 10min One time each direction	
6	Shock test (non-operating)	Shock level : 100G Waveform : Half sine wave, 2ms Direction : $\pm X$, $\pm Y$, $\pm Z$ One time each direction	
7	Altitude Operating Storage / Shipment	0 - 10,000 feet (3,048m) 0 - 40,000 feet (12,192m)	

Note 1) Result Evaluation Criteria:

TFT-LCD panels test should take place after cooling enough at room temperature.

In the standard condition, there should be no particular problems that may affect the display function.

* T_a = Ambient Temperature

Product Specification

7. International Standards

7-1. Safety

- a) IEC 62368-1, The International Electro-technical Commission(IEC).
Audio/video, Information and Communication Technology Equipment - Safety - Safety Requirements.
- b) EN 62368-1, European Committee for Electro-technical Standardization (CENELEC)
Audio/video, Information and Communication Technology Equipment - Safety Requirements
- c) UL 62368-1, UL LLC.
Audio/video, Information and Communication Technology Equipment - Safety Requirements
- d) CAN/CSA C22.2 No.62368-1, Canadian Standards Association (CSA).
Audio/video, Information and Communication Technology Equipment - Safety Requirements
- e) IEC 60950-1, The International Electro technical Commission (IEC).
Information Technology Equipment - Safety - Part 1 : General Requirements

7-2. Environment

- a) RoHS, Commission Delegated Directive (EU) 2015/863 of 31 March 2015 amending Annex II to Directive 2011/65/EU of the European Parliament and of the Council

Product Specification

8. Packing

8-1. Designation of Lot Mark

a) Lot Mark

A	B	C	D	E	F	G	H	I	J	K	L	M
---	---	---	---	---	---	---	---	---	---	---	---	---

A,B,C: Size(Inch)

E: Month

D: Year

F ~ M: Serial No.

Notes:

1) Year

Year	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029
Mark	K	L	M	N	P	R	S	T	U	V

2) Month

Month	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Mark	1	2	3	4	5	6	7	8	9	A	B	C

b) Location of Lot Mark

Serial No. is printed on the label. The label is attached to the backside of the LCD module.


This is subject to change without prior notice.

Product Specification

8-2. Packing Form

- a) Package quantity in one box : 10ea
 Package quantity in one Pallet : 60ea
 b) Box Size : 365mm X 710mm X 448mm
 C) Pallet Ass'y Size: 1140mmX740mmX1069mm

* LCM Direction(Insert to Bottom Packing): COF Down

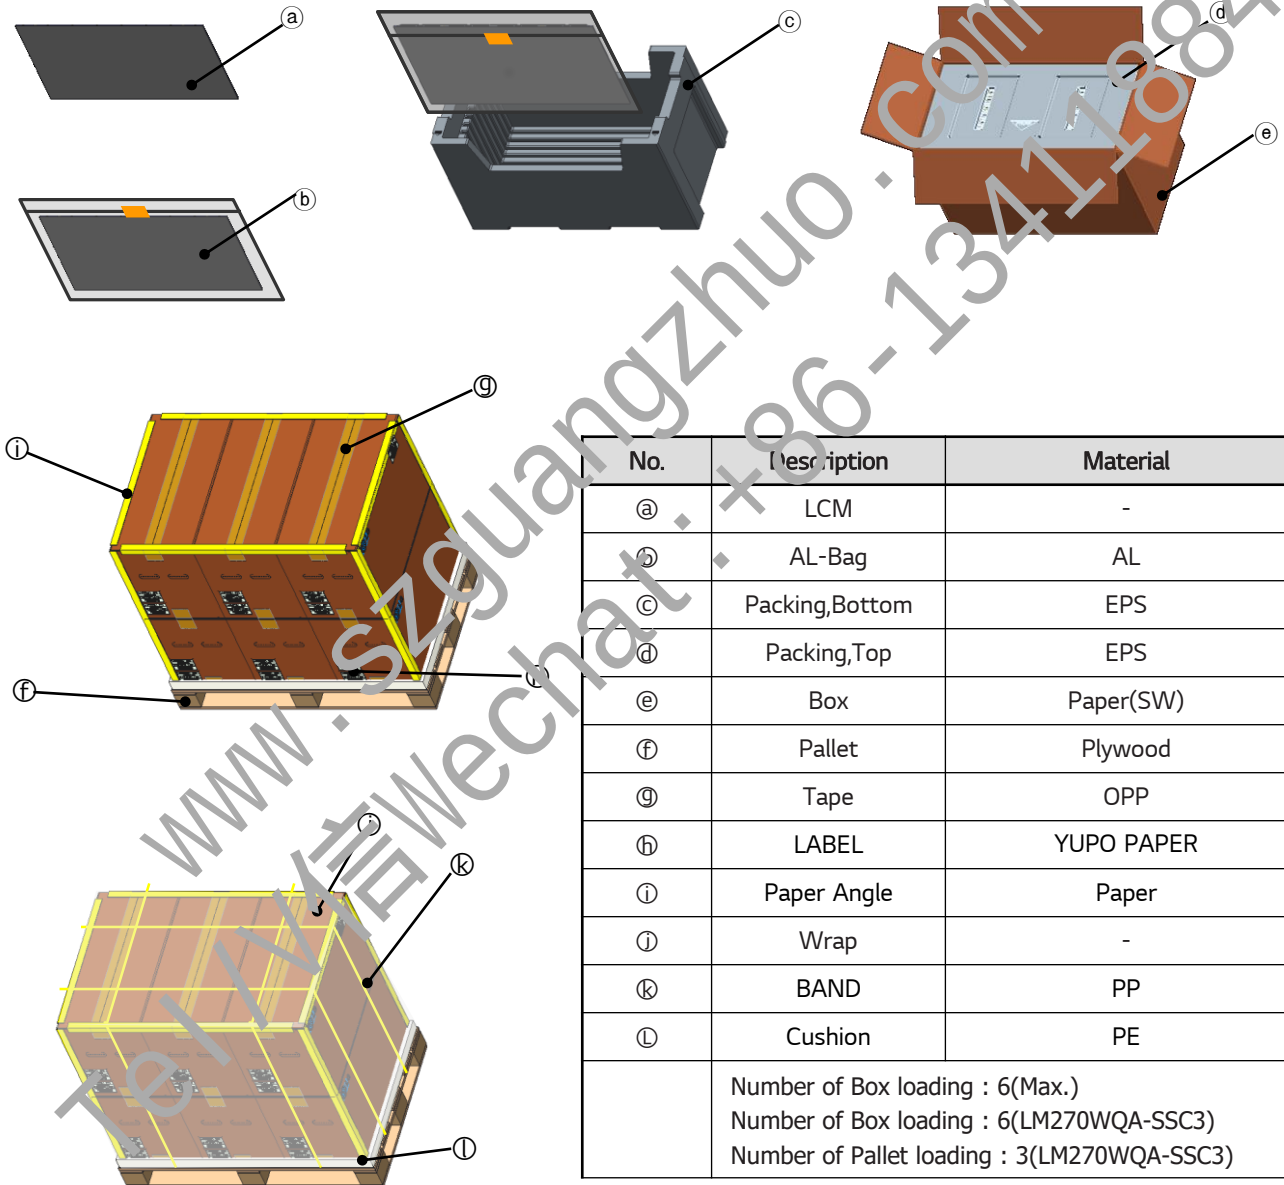

- 1) You must mount a module using holes arranged in rear side.
- 2) You should consider the mounting structure so that uneven force(ex. Twisted stress) is not applied to the module. And the case on which a module is mounted should have sufficient strength so that external force is not transmitted directly to the module.
- 3) Please attach the surface transparent protective plate to the surface in order to protect the polarizer. Transparent protective plate should have sufficient strength in order to resist external force.
- 4) You should adopt radiation structure to satisfy the temperature specification.
- 5) Acetic acid type and chlorine type materials for the cover case are not desirable because the former generates corrosive gas of attacking the polarizer at high temperature and the latter causes circuit break by electro-chemical reaction.
- 6) Do not touch, push or rub the exposed polarizers with glass, tweezers or anything harder than HB pencil lead. And please do not rub with dust clothes with chemical treatment. Do not touch the surface of polarizer for bare hand or greasy cloth.
(Some cosmetics are detrimental to the polarizer.)
- 7) When the surface becomes dusty, please wipe gently with absorbent cotton or other soft materials like chamois soaks with petroleum benzene. Normal-hexane is recommended for cleaning the adhesives used to attach front / rear polarizers. Do not use acetone, toluene and alcohol because they cause chemical damage to the polarizer.
- 8) Wipe off saliva or water drops as soon as possible. Their long time contact with polarizer causes deformations and color fading.
- 9) Do not open the case because inside circuits do not have sufficient strength.
- 10) System frame should not have an interference with panel which can cause LC Leakage/Panel Crack due to the contraction of system frame at low temperature condition or panel damage by any other circumstances.

9-2. Operating Precautions

- 1) Response time depends on the temperature.(In lower temperature, it becomes longer.)
- 2) Brightness depends on the temperature.(In higher temperature, it becomes lower.) And in lower temperature, response time(required time that brightness is stable after turned on) becomes longer.
- 3) Be careful for condensation at sudden temperature change. Condensation makes damage to polarizer or electrical contacted part. And after fading condensation, smear or spot will occur.
- 4) When fixed patterns are displayed for a long time, remnant image is likely to occur.
- 5) Module has high frequency circuits. Sufficient suppression to the electromagnetic interference shall be done by system manufacturers. Grounding and shielding methods may be important to minimize the interference.
- 6) Please do not give any mechanical and/or acoustical impact to LCM. Otherwise, LCM can't be operated its full characteristics perfectly.
- 7) A screw which is fastened up the steels should be a machine screw.(if not, it causes metallic foreign material and deal LCM a fatal blow)
- 8) Please do not set LCD on its edge.
- 9) When LCMs are used for public display, defects such as Yogan image sticking phenomenon can be happened. Therefore it is not allowable to use in Public display.
- 10) LCMs cannot support "Interlaced Scan Method"
- 11) When this reverse model is used as a forward-type model (PCB on top side) or a Portrait-type mode at storage and operation, LCD should not be damaged by defects of LCM.
- 12) Please conduct image sticking test after 1-hour aging with white pattern at normal temperature. (25~40°C)

Product Specification

9-3. Electrostatic Discharge Control

Since a module is composed of electronic circuits, it is not strong to electrostatic discharge. Make certain that treatment persons are connected to ground through wrist band etc. And don't touch interface pin directly.

9-4. Precautions For Strong Light and Hazardous Materials Exposure

Strong light exposure causes degradation of polarizer and color filter.

The LCM should be avoided direct contact with hazardous materials such as sulfur, acetic acid, chlorine, etc. These materials may cause chemical reaction such as sulfurization, corrosion, discoloration, etc.

9-5. Storage

When storing modules as spares for a long time, the following precautions are necessary:

- 1) Store them in a dark place. Do not expose the module to sunlight or fluorescent light.
Storage condition is guaranteed under packing condition.
- 2) The polarizer surface should not come in contact with any other object.
It is recommended that they be stored in the container in which they were shipped.


9-6. Handling Precautions For Protection Film

- 1) The protection film is attached to the bezel with a small masking tape. When the protection film is peeled off, static electricity is generated between the film and polarizer. This should be peeled off slowly and carefully by people who are electrically grounded and with well ion-blown equipment or in such a condition, etc.
- 2) When the module with protection film attached is stored for a long time, sometimes there remains a very small amount of glue still on the bezel after the protection film is peeled off.
- 3) You can remove the glue easily. When the glue remains on the bezel surface or its vestige is recognized, please wipe them off with absorbent cotton waste or other soft material like chamois soaked with normal hexane.


Product Specification

APPENDIX

Serial Label

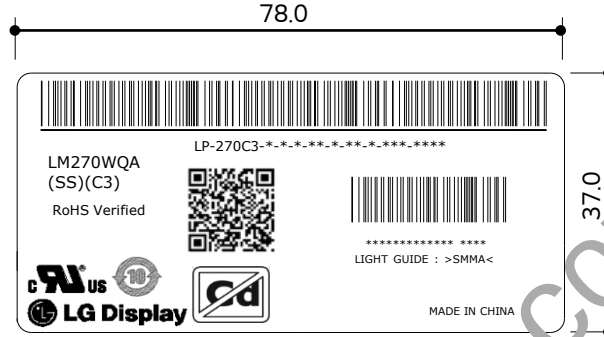

Box Label

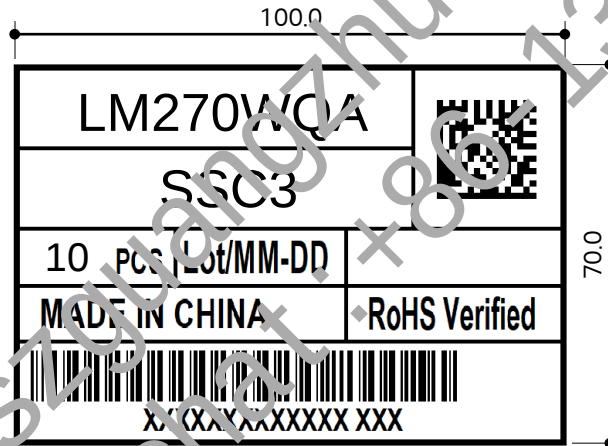

Pallet Label

