



Product Specification

SPECIFICATION FOR APPROVAL

- () Preliminary Specification
- (◆) Final Specification

Title		14.0" FHD TFT LCD	
Customer		SUPPLIER	LG Display Co., Ltd.
Dell P/N		*MODEL	LP140WF9
		Suffix	SPH2

*When you obtain standard approval, please use the above model name without suffix

APPROVED BY	SIGNATURE
_____	_____
_____	_____
_____	_____

Please return 1 copy for your confirmation with your signature and comments.

APPROVED BY	SIGNATURE
J. Y. Lee / G. Manager	_____
REVIEWED BY	
K. M. Lee / Manager [C]	_____
B. J. Kim / Manager [M]	_____
K. T. Park / Manager [P]	_____
PREPARED BY	
J. P. Lee / Engineer	_____

Products Engineering Dept.
LG Display Co., Ltd

Product Specification

Contents

No	ITEM	Page
	COVER	1
	CONTENTS	2
	RECORD OF REVISIONS	3
1	GENERAL DESCRIPTION	4
2	ABSOLUTE MAXIMUM RATINGS	5
3	ELECTRICAL SPECIFICATIONS	7
3-1	LCD ELECTRICAL CHARACTERISTICS	7
3-2	LED BACKLIGHT ELECTRICAL CHARACTERISTICS	8
3-3	INTERFACE CONNECTIONS	9
3-4	eDP SIGNAL TIMING SPECIFICATIONS	11
3-5	SIGNAL TIMING SPECIFICATIONS	15
3-6	SIGNAL TIMING WAVEFORMS	15
3-7	COLOR INPUT DATA REFERENCE	15
3-8	POWER SEQUENCE	17
4	OPTICAL SPECIFICATIONS	18
5	MECHANICAL CHARACTERISTICS	21
6	RELIABILITY	24
7	INTERNATIONAL STANDARDS	25
7-1	SAFETY	25
7-2	ENVIRONMENT	25
8	PACKING	26
8-1	DESIGNATION OF LOT MARK	26
8-2	PACKING FORM	27
9	PRECAUTIONS	32
	APPENDIX A. LGD PROPOSAL FOR SYSTEM COVER DESIGN	34
	APPENDIX B. LGD PROPOSAL FOR eDP INTERFACE DESIGN GUIDE	44
	APPENDIX C. LGD Proposal for Measurement Method (Thickness/Bracket Height/etc.)	52
	APPENDIX D. ENHANCED EXTENDED DISPLAY IDENTIFICATION DATA	53

Product Specification

Record of Revisions

Revision No	Revision Date	Page	Before	After	EDID version
0.0	Feb. 08. 2021	All	First Draft (Preliminary Specification)	-	-
0.1	May. 21. 2021	53-55	-	Update E-EDID Table (Checksum: 03)	-
1.0	Jun. 18. 2021	All	Final Draft	-	1.0
		26	-	Update Label drawing	-
		53-55	EDID Checksum: 0B (Dell rev. X20)	EDID Checksum: 9F (Dell rev. A00)	-
1.1	Oct. 07. 2021	26	-	Update Label information	1.1
		53-55	EDID Checksum: 9 (Dell rev. X00)	EDID Checksum: 9E (Dell rev. A01)	-


www.szguangzhuo.com +86-13411884959
Tel/Wechat: +86-13411884959

Product Specification

1. General Description

1-1. Introduction

The LP140WF9 is a Color Active Matrix Liquid Crystal Display with an integral LED backlight system. The matrix employs a-Si Thin Film Transistor as the active element. It is a transmissive type display operating in the normally black mode. This TFT-LCD has 14.0 inches diagonally measured active display area with FHD resolution (1920 horizontal by 1080 vertical pixel array). Each pixel is divided into Red, Green and Blue sub-pixels or dots which are arranged in vertical stripes. Gray scale or the brightness of the sub-pixel color is determined with a 8-bit gray scale signal for each dot, thus, presenting a palette of more than 16,777,216 colors. The LP140WF9 has been designed to apply the interface method that enables low power, high speed, low EMI. The LP140WF9 is intended to support applications where thin thickness, low power are critical factors and graphic displays are important. In combination with the vertical arrangement of the sub-pixels, the LP140WF9 characteristics provide an excellent flat display for office automation products such as Notebook PC.

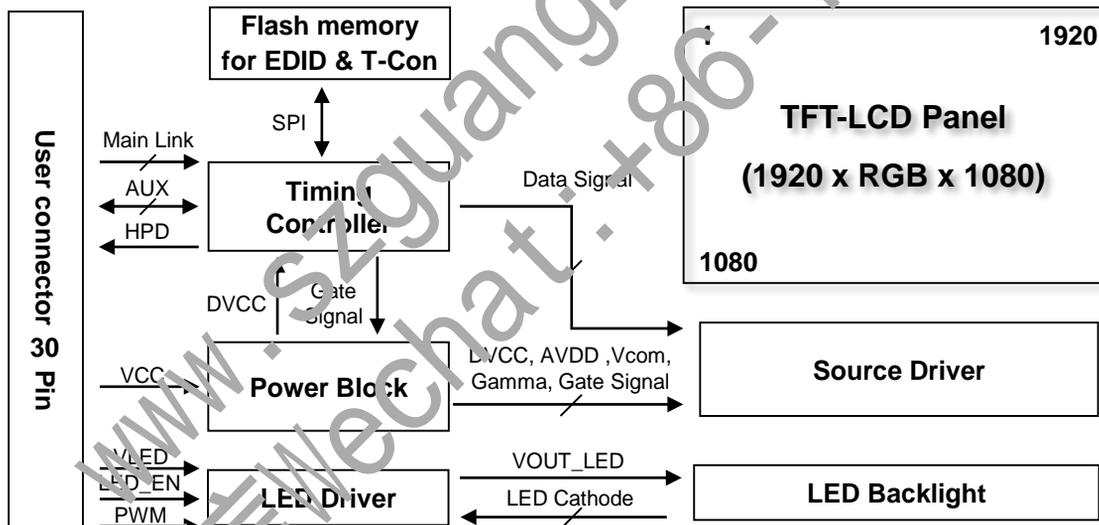

Product Specification

1-2. General Feature

Active Screen Size	14.0 inches diagonal	
Outline Dimension	315.81(H, Typ.) × 186.30(V, Typ.) × 2.40(D, Max.) [mm] without PCB	
Pixel Pitch	0.1611 mm X 0.1611 mm	
Pixel Format	1920 horiz. by 1080 vert. Pixels RGB strip arrangement	
Color Depth	8bit, 16,777,216 colors	
Luminance, White	400 cd/m ² (Typ.)	
Power Consumption	Total 2.49W (Max.) Logic: 0.4W (Max. @ Mosaic), B/L: 2.09W (Max.)	
Weight	230g (Max.)	
Display Operating Mode	Normally black	
Surface Treatment	Anti-Glare treatment (3H) of the front polarizer	
Color Gamut	sRGB min 95%	
LED Dimming Control mode	DC Dimming	
RoHS Compliance	Yes	
BFR / PVC / As Free	Yes for all	
eDP version(Tcon)	eDP1.4	
DPCD version	Ver1.4	
Function	PSR	PSR2
	sDRRS	sDRRS : 8Hz
	DMRRS	Support
	Adaptive sync	FreeSync
	NVSR	Not support
	SSC	Support

Product Specification


2. Absolute Maximum Ratings

The following are maximum values which, if exceeded, may cause faulty operation or damage to the unit.

Table 1. ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Values		Units	Notes
		Min	Max		
Power Input Voltage	VCC	-0.3	4.0	V _{CC}	at 25 ± 2°C
Operating Temperature	TOP	0	50	°C	1
Storage Temperature	TST	-20	60	°C	1,2
Operating Ambient Humidity	HOP	10	90	%RH	1
Storage Humidity	HST	10	90	%RH	1,2

Note : 1. Temperature and relative humidity range are shown in the figure below.
 Wet bulb temperature should be 39°C Max and no condensation of water.
 Note : 2. Storage Condition is guaranteed under packing condition

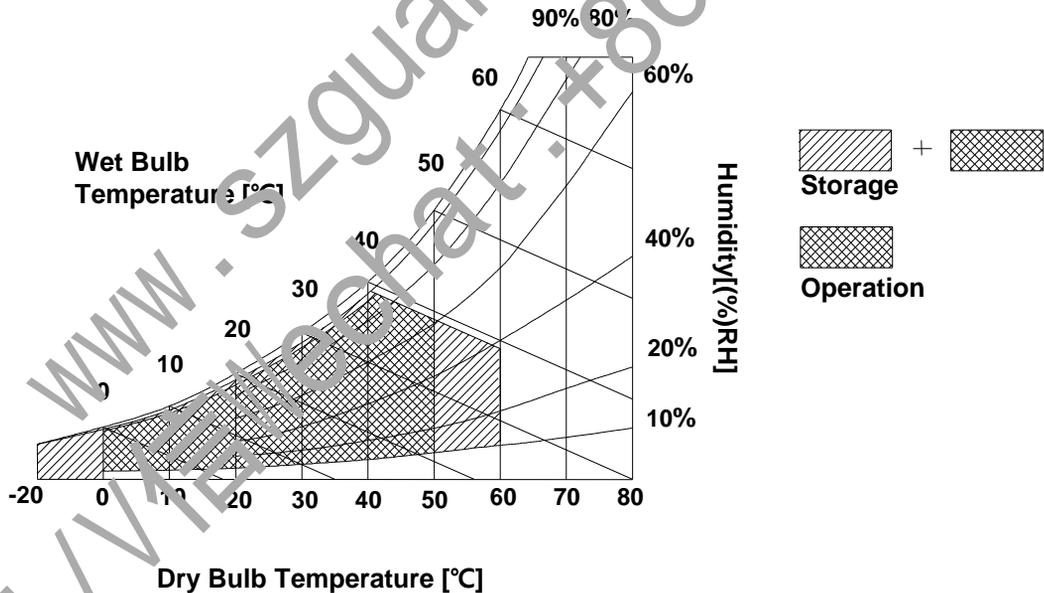

Product Specification

3. Electrical Specifications


3-1. LCD Electrical Characteristics

Table 2. LCD ELECTRICAL CHARACTERISTICS


Parameter	Symbol	Values			Unit	Notes	
		Min	Typ	Max			
Power Supply Input Voltage	V _{CC}	3.0	3.3	3.6	V	1	
Permissive Power Supply Input Ripple	V _{CCrp}	-	-	100	mV _{p-p}		
Power Supply Input Current	Mosaic	I _{CC}	-	110	122	nA	2
Power Consumption	Mosaic	P _{CC}	-	0.36	0.4	W	
Power Supply Inrush Current	I _{CC_P}	-	-	1.5	A	3	
Differential Impedance	Z _{LVDS}	90	100	110	Ω		

Note)

1. The measuring position is the connector of LCM and the test conditions are under 25°C, f_v = 60Hz
2. The specified I_{CC} current and power consumption are under the V_{CC} = 3.3V , 25°C, f_v = 60Hz condition and Mosaic pattern.

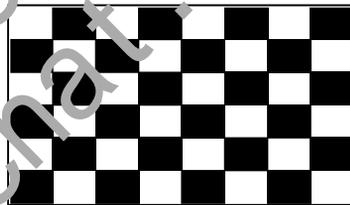

3. The V_{CC} rising time is same as the minimum of T1 at Power on sequence.

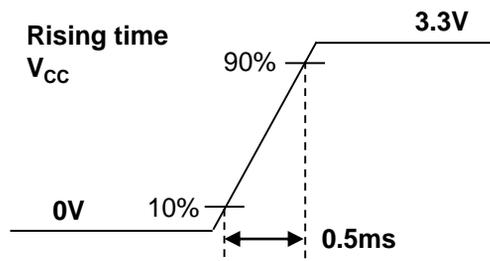

Product Specification


3-2. LED Backlight Electrical Characteristics

Table 3. LED B/L ELECTRICAL CHARACTERISTICS

Parameter	Symbol	Values			Unit	Notes	
		Min	Typ	Max			
LED Power Input Voltage	V_{LED}	5.0	12.0	21.0	V	1	
LED Power Input Current	I_{LED}	-	167	174	mA	2	
LED Power Consumption	P_{LED}	-	2.00	2.03	W	3	
LED Power Inrush Current	I_{LED_P}	-	-	1.5	A	4	
PWM Duty Ratio		5	-	100	%	4	
PWM Resolution			10		Bit	5	
PWM Jitter		0	-	0.05	%	6	
PWM Frequency	F_{PWM}	200	-	2000	Hz	7	
PWM	High Level Voltage	V_{PWM_H}	2.5	-	3.6	V	
	Low Level Voltage	V_{PWM_L}	0	-	0.3	V	
	Tr / Tf @ 200Hz		-	-	25/25	us	
	Tr / Tf @ 2Khz		-	-	2.5/2.5	us	
	P to P Jitter @ 200hz		-	-	1	us	8
	P to P Jitter @ 2Khz		-	-	0.1	us	
LED_EN	High Voltage	$V_{LED_EN_H}$	2.5	-	3.6	V	
	Low Voltage	$V_{LED_EN_L}$	0	-	0.3	V	
Life Time		15,000	-	-	Hrs	9	

Note)

1. The measuring position is the connector of LCM and the test conditions are under 25°C.
2. The current and power consumption with LED Driver are under the $V_{LED} = 12.0V$, 25°C, PWM Duty 100% and White pattern with the normal frame frequency operated(60Hz).
3. The V_{LED} rising time is same as the minimum of T13 at Power on sequence.

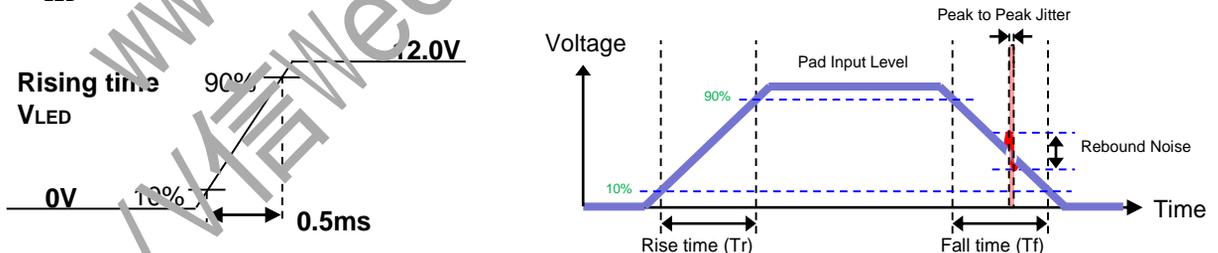


4. The operation of LED Driver below minimum dimming ratio may cause flickering or reliability issue.
5. 10bit resolution means it's possible to change PWM duty by 0.1% step. (8bit operated by 0.4% step)
6. If Jitter of PWM is bigger than maximum, it may induce flickering.
7. This Spec. is not effective at 100% dimming ratio as an exception because it has DC level equivalent to 0Hz. In spite of acceptable range as defined, the PWM Frequency should be fixed and stable for more consistent brightness control at any specific level desired.
8. PWM rebound spec $\leq 0.1V$
9. The life time is determined as the time at which brightness of LCD is 50% compare to that of minimum value specified in table 7. under general user condition.

Product Specification

3-3. Interface Connections

Table 4. MODULE CONNECTOR PIN CONFIGURATION (CN1)

Pin	Symbol	Description	Notes
1	DBC_EN	DBC Enable (Active high)	<p>[Connector] HILOSE, IKN38B-30S-0.5H (30pin, 0.5pitch) or equivalent</p> <p>[Connector pin arrangement]</p>  <p>[LGD P-Vcom using information] 1. Pin for P-Vcom : #24, #25 2. P-Vcom Address : 0101000x</p>
2	GND	High Speed Ground	
3	Lane1_N	Complement Signal Link Lane 1	
4	Lane1_P	True Signal Link Lane 1	
5	GND	High Speed Ground	
6	Lane0_N	Complement Signal Link Lane 0	
7	Lane0_P	True Signal Link Lane 0	
8	GND	High Speed Ground	
9	AUX_CH_P	True Signal Auxiliary Channel	
10	AUX_CH_N	Complement Signal Auxiliary Channel	
11	GND	High Speed Ground	
12	VCC	LCD logic and driver power	
13	VCC	LCD logic and driver power	
14	LCD Self Test or NC	LCD Panel Self Test Enable (Optional)	
15	GND	LCD logic and driver ground	
16	GND	LCD logic and driver ground	
17	HPD	HPD signal pin	
18	BL_GND	LED Backlight ground	
19	BL_GND	LED Backlight ground	
20	BL_GND	LED Backlight ground	
21	eSCL	SCL control	
22	BL ENABLE	LED Backlight control on/off control	
23	BL PWM	System PWM signal input for dimming	
24	NC Reserved	Reserved for LCD manufacture's use	
25	NC Reserved	Reserved for LCD manufacture's use	
26	VLED	LED Backlight power (12V Typical)	
27	VLED	LED Backlight power (12V Typical)	
28	VLED	LED Backlight power (12V Typical)	
29	VLED	LED Backlight power (12V Typical)	
30	NC Reserved	Reserved for LCD manufacture's use	

3-3-1. Input/output signal circuit

Figure1.HPD Output circuit is as below

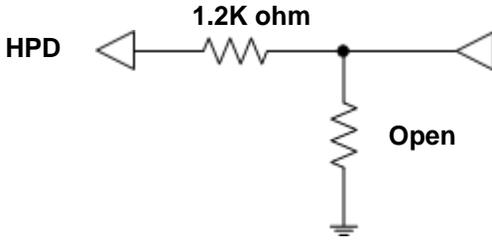


Figure2.BL PWM input circuit is as below

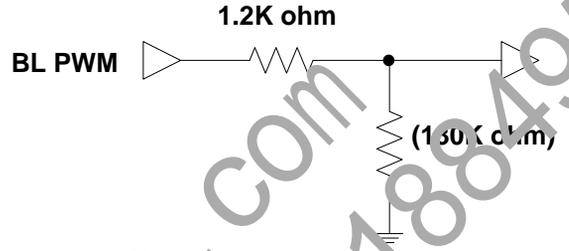


Figure3.BL Enable input circuit is as below

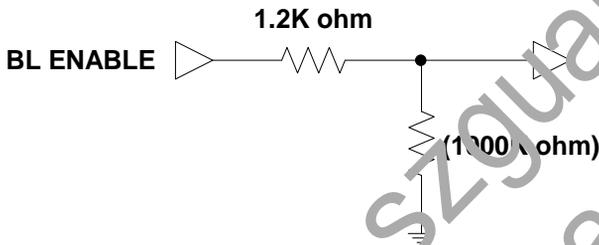


Figure4.BIST input circuit is as below

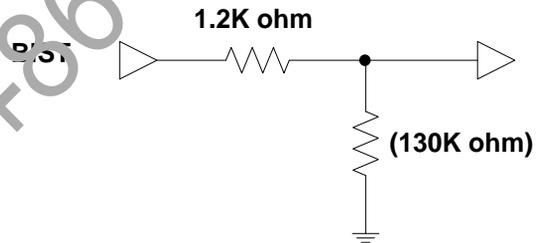


Figure5.DBC input circuit is as below


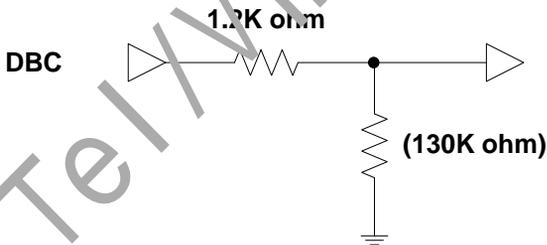



Figure6.SOLC input circuit is as below

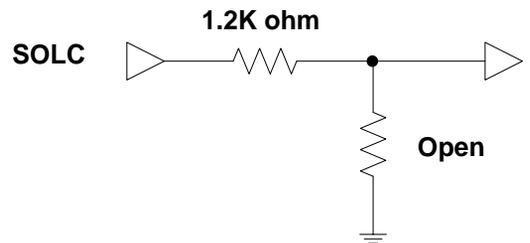


Product Specification

3-4. eDP Signal Timing Specifications

3-4-1. Definition of Differential Voltage

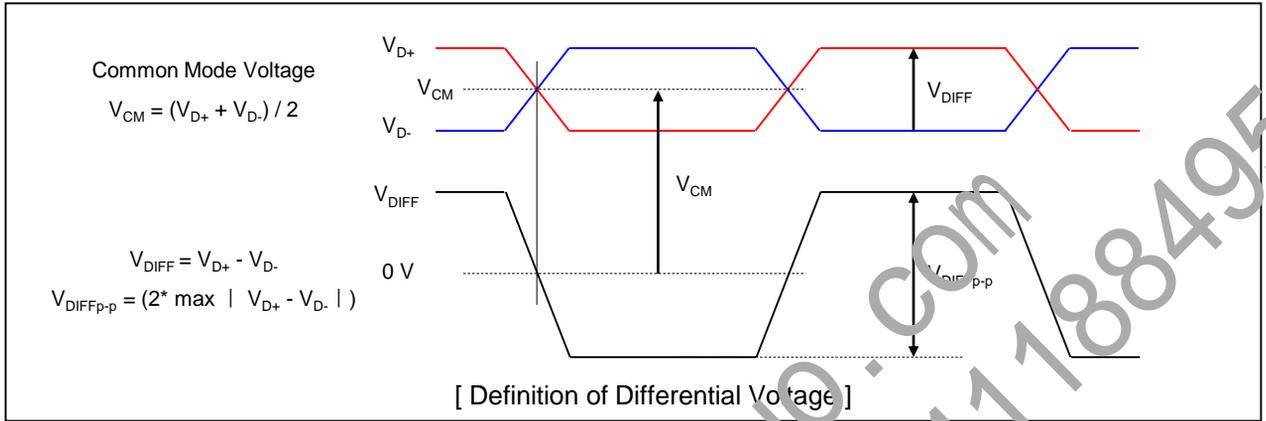

3-4-2. Main Link EYE Diagram

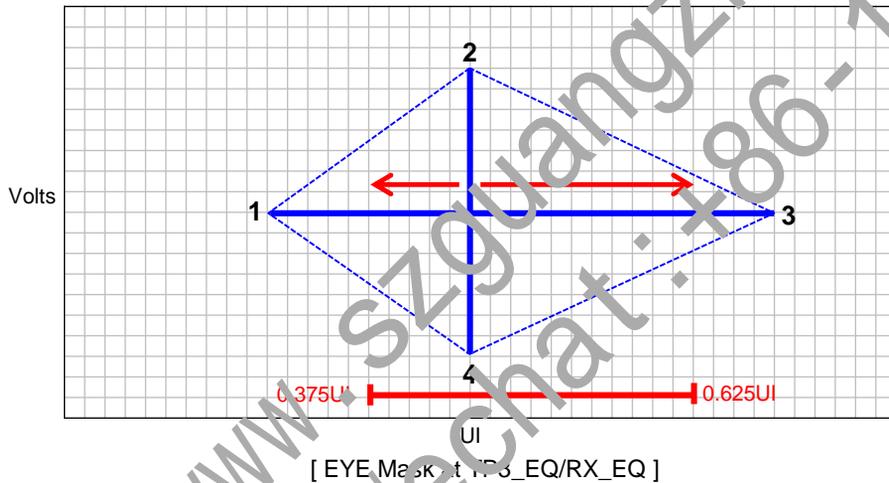

Point	Time(UI)	Voltage(V)
1	Any UI location (0mV)	0.000
2	0.375<point2<0.625	0.0375
3	Point1 + 0.5UI	0.000
4	0.375<point4<0.625	-0.0375


Point	Time(UI)	Voltage(V)
1	Any UI location (0mV)	0.000
2	0.375<point2<0.625	0.035
3	Point1 + 0.45UI	0.000
4	0.375<point2<0.625	-0.035

[eDP TP3_EQ EYE Mask Vertices]

[eDP RX_EQ EYE Mask Vertices]

Product Specification

3-4-3. eDP Main Link Signal

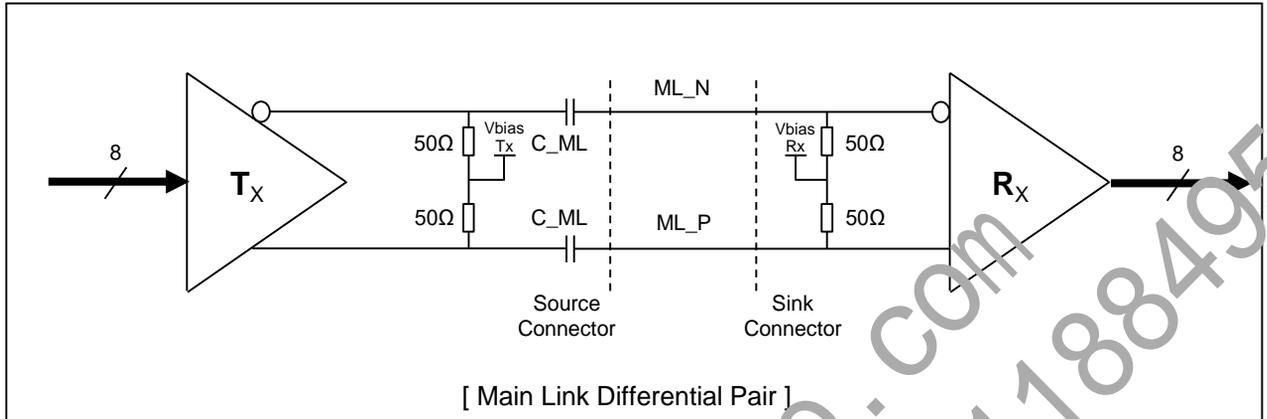


Parameter	Symbol	Min	Typ	Max	Unit	Notes
Unit Interval for high bit rate (2.7Gbps / lane)	UI_HBR	-	370	-	ps	
Unit Interval for reduced bit rate (2.43Gbps / lane)	UI_2.16	-	412	-	ps	
Unit Interval for reduced bit rate (2.16Gbps / lane)	UI_2.16	-	46	-	ps	
Unit Interval for reduced bit rate (1.62Gbps / lane)	UI_HBR	-	617	-	ps	
Link Clock Down Spreading	Amplitude	0	-	0.5	%	
	Frequency	30	-	33	kHz	
Differential peak-to-peak Voltage at Sink side connector	$V_{TX-DIFFp-p}$	75	-	-	mV	TP3_EQ
EYE width at Sink side connector	$T_{TX-EYE-CONN}$	0.5	-	-	UI	TP3_EQ
Differential peak-to-peak voltage at RX package pin	$V_{RX-DIFFp-p}$	70	-	-	mV	TP4_EQ
EYE width at RX package pin	$T_{RX-EYE-CONN}$	0.45	-	-	UI	TP4_EQ
Rx DC common mode voltage	$V_{RX CM}$	0	-	1.0	V	
AC Coupling Capacitor	$C_{SOURCE-ML}$	75	-	200	nF	Source side

Note)

1. Termination resistor is typically integrated into the transmitter and receiver implementations.
2. AC Coupling Capacitor is not placed at the sink side.
3. In cabled embedded system, it is recommended the system designer ensure that EYE width and voltage are met at the sink side connector pins.

Product Specification

3-4-4. eDP AUX Channel Signal

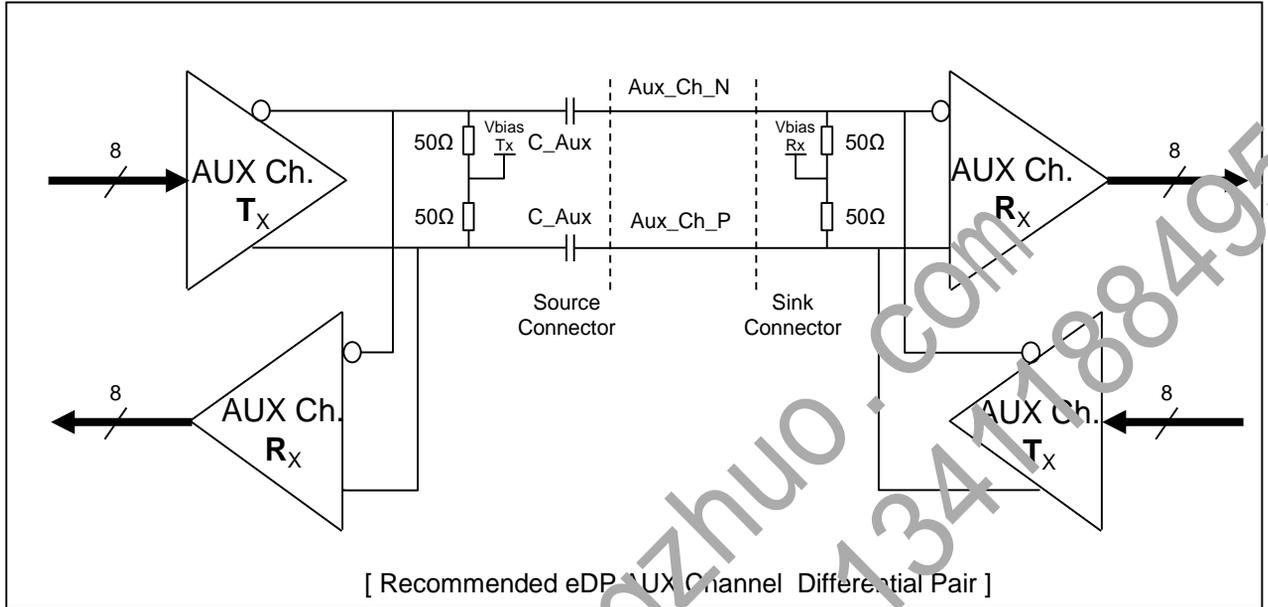


Parameter	Symbol	Min	Typ	Max	Unit	Notes
AUX Unit Interval	UI	0.4	-	0.6	us	
AUX Jitter at Tx IC Package Pins	Jitter	-	-	0.04	UI	Equal to 24ns
AUX Jitter at Rx IC Package Pins		-	-	0.05	UI	Equal to 30ns
AUX Peak-to-peak voltage at TX package pins (TP1)	$V_{AUX_DIFFp-p}$	0.18	0.20	1.38	V	
AUX Peak-to-peak voltage at TP3		0.14	-	1.36	V	
AUX EYE width at Connector Pins of Tx and Rx		0.98	-	-	UI	
AUX DC common mode voltage	V_{AUX-CM}	0	-	1.0	V	
AUX AC Coupling Capacitor	$C_{SOURCE-AUX}$	75		200	nF	Source side

Note)

1. Termination resistor is typically integrated into the transmitter and receiver implementations.
2. AC Coupling Capacitor is not placed at the sink side.
3. $V_{AUX_DIFFp-p} = 2 * |V_{AUXP} - V_{AUXN}|$

Product Specification

3-4-5. eDP HPD Signal

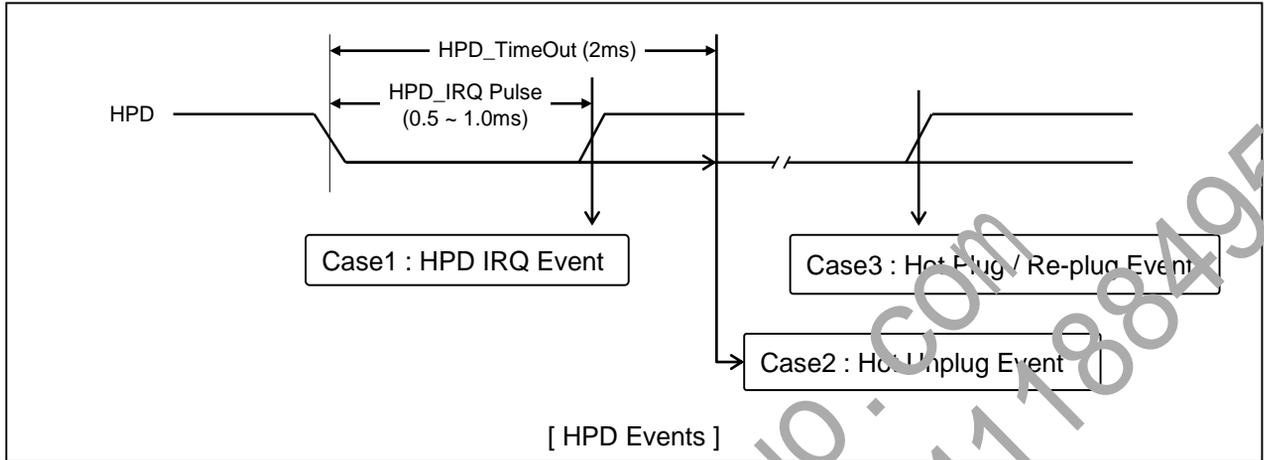

Parameter	Symbol	Min	Typ	Max	Unit	Notes
HPD Voltage	HPD	2.25	-	3.6	V	Sink side Driving
Hot Plug Detection Threshold		2.0	-	-	V	Source side Detecting
Hot Unplug Detection Threshold		-	-	0.8	V	
HPD_IRQ Pulse Width	HPD_IRQ	0.5	-	1.0	ms	
HPD_TimeOut		2.0	-	-	ms	HPD Unplug Event

Note)

1. HPD IRQ : Sink device wants to notify the Source device that Sink's status has changed so it toggles HPD line, forcing the Source device to read its Link / Sink Receiver DPCD field via the AUX-CH
2. HPD Unplug : The Sink device is no longer attached to the Source device and the Source device may then disable its Main Link as a power saving mode
3. Plug / Re-plug : The Sink device is now attached to the Source device, forcing the Source device to read its Receiver capabilities and Link / Sink status Receiver DPCD fields via the AUX-CH

Product Specification

3-5. Signal Timing Specifications


This is the signal timing required at the input of the User connector. All of the interface signal timing should be satisfied with the following specifications and specifications of eDP Tx/Rx for its proper operation.

Table 4. TIMING TABLE

ITEM	Symbol	Min	Typ	Max	Unit	Note
DCLK	Frequency	f_{CLK}	-	138.7	-	MHz
Hsync	Period	t_{HP}	2072	2080	2088	t_{CLK}
	Width	t_{WH}	32	32	32	
	Width-Active	t_{WHA}	1920			
Vsync	Period	t_{VP}	1108	1111	1114	t_{HP}
	Width	t_{WV}	5	5	5	
	Width-Active	t_{WVA}	1080			
Data Enable	Horizontal back porch	t_{HBP}	72	80	88	t_{CLK}
	Horizontal front porch	t_{HFP}	48	48	48	
	Vertical back porch	t_{VBP}	20	23	24	t_{HP}
	Vertical front porch	t_{VFP}	3	3	5	

Notice. all reliabilities are specified for timing specification based on refresh rate of 60Hz. However, LP140WF9 has a good actual performance even at lower refresh rate (e.g. 40Hz or 50Hz) for power saving Mode, whereas LP140WF9 is secured only for function under lower refresh rate. 60Hz at Normal mode, 50Hz, 40Hz at Power save mode. Don't raise Flicker level (Power save mode).

3-6. Signal Timing Waveforms

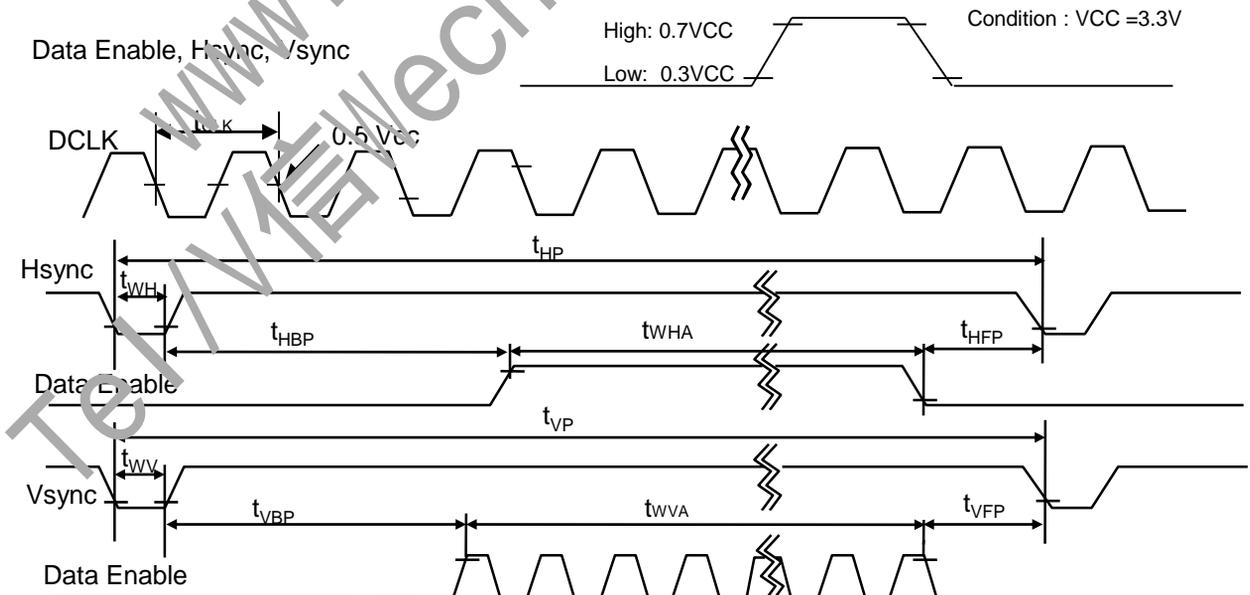

Product Specification

3-7. Color Input Data Reference

The brightness of each primary color (red, green and blue) is based on the 8-bit gray scale data input for the color ; the higher the binary input, the brighter the color. The table below provides a reference for color versus data input.

Table 5. COLOR DATA REFERENCE

Color		Input Color Data																							
		RED								GREEN								BLUE							
		MSB				LSB				MSB				LSB				MSB		LSB					
		R7	R6	R5	R4	R3	R2	R1	R0	G7	G6	G5	G4	G3	G2	G1	G0	B7	B6	B5	B4	B3	B2	B1	B0
Basic Color	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Green	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Cyan	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	Magenta	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
RED	RED (0)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	RED (1)	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
							
	RED (254)	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	RED (255)	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
GREEN	GREEN (0)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	GREEN (1)	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0
							
	GREEN (254)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0
	GREEN (255)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
BLUE	BLUE (0)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	BLUE (1)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
							
	BLUE (254)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0
	BLUE (255)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1

Product Specification

3-8. Power Sequence

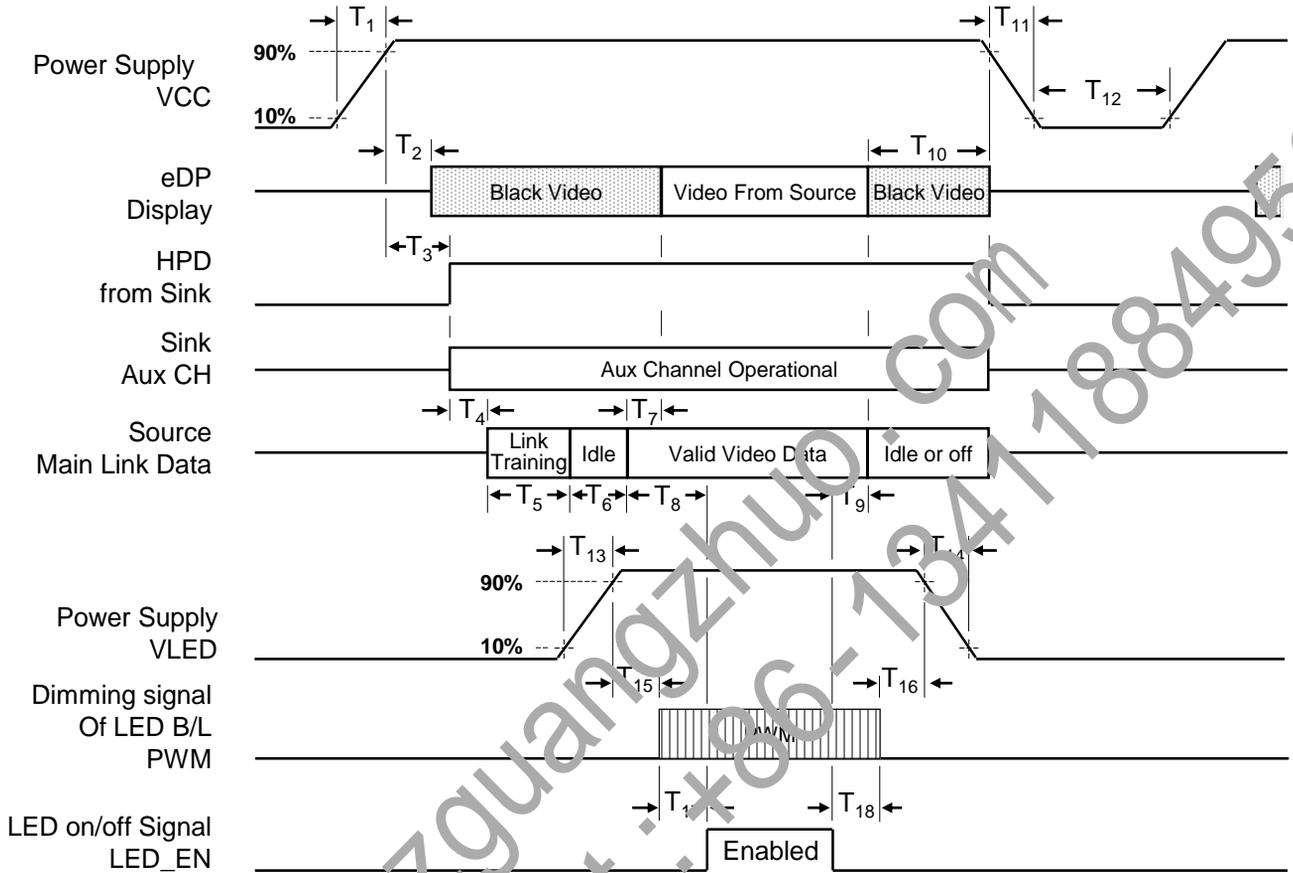


Table 6. POWER SEQUENCE TABLE

Symbol	Required By	Limits		Units	Notes	Symbol	Required By	Limits		Units	Notes
		Min	Max					Min	Max		
T ₁	Source	0.5	10	ms	-	T ₁₀	Source	0	500	ms	-
T ₂	Sink	-	200	ms	-	T ₁₁	Source	-	10	ms	-
T ₃	Sink	0	200	ms	-	T ₁₂	Source	500	-	ms	-
T ₄	Source	-	-	ms	-	T ₁₃	Source	0.5	10	ms	-
T ₅	Source	-	-	ms	-	T ₁₄	Source	0.5	10	ms	-
T ₆	Source	-	-	ms	-	T ₁₅	Source	10	-	ms	-
T ₇	Sink	0	50	ms	-	T ₁₆	Source	10	-	ms	-
T ₈	Source	-	-	ms	5	T ₁₇	Source	0	-	ms	-
T ₉	Source	-	-	ms	6	T ₁₈	Source	0	-	ms	-

- Note)
- Do not insert the mating cable when system turn on.
 - Valid Data have to meet "3-3. eDP Signal Timing Specifications"
 - Video Signal, LED_EN and PWM need to be on pull-down condition on invalid status.
 - LGD recommend the rising sequence of VLED after the Vcc and valid status of Video Signal turn on.
 - Driving signal of B/L must be "On" after normal video signal (Normal operating data from source) input.
 - B/L driving must be "Off" before normal signal (Normal operating data from source) finish.

Product Specification

4. Optical Specification

Optical characteristics are determined after the unit has been 'ON' and stable for approximately 20 minutes in a dark environment at 25°C. The values specified are at an approximate distance 50cm from the LCD surface at a viewing angle of Φ and Θ equal to 0°.

FIG. 1 presents additional information concerning the measurement equipment and method.

FIG. 1 Optical Characteristic Measurement Equipment and Method

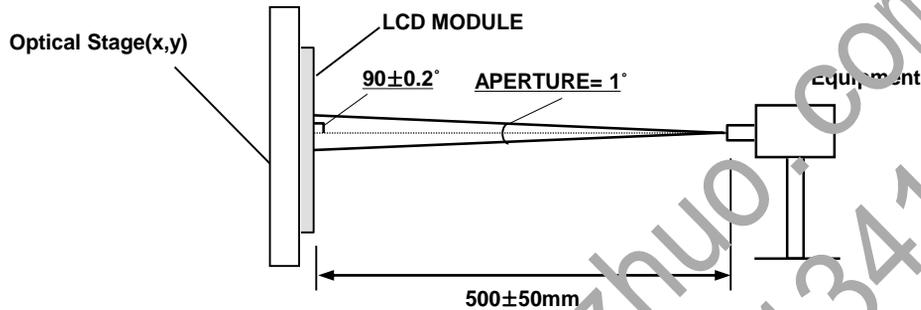


Table 7. OPTICAL CHARACTERISTICS

Ta=25°C, VCC=3.3V, fv=60Hz

Parameter	Symbol	Values			Units	Notes	
		Min	Typ	Max			
Contrast Ratio	CR	1000	1500	-		1	
Surface Luminance, white	L_w	340	400	-	cd/m ²	2	
Luminance Variation	$\delta_{\text{WHITE}(5P)}$	-	1.2	1.4	-	3	
	$\delta_{\text{WHITE}(13F)}$	-	1.4	1.6	-		
Response Time	T _{TR} / f	-	30	35	ms	4	
Color Coordinates	RED	R _x	Typical - 0.03	0.655	Typical + 0.03	5	
		R _y		0.330			
	GREEN	G _x		0.300			
		G _y		0.600			
	BLUE	B _x		0.145			
		B _y		0.055			
	WHITE	W _x		0.313			
		W _y		0.329			
Viewing angle	x axis, right ($\Phi=0^\circ$)	Θ_r	80	85	-	Degree	6
	x axis, left ($\Phi=180^\circ$)	Θ_l	80	85	-		
	y axis, up ($\Phi=90^\circ$)	Θ_u	80	85	-		
	y axis, down ($\Phi=270^\circ$)	Θ_d	80	85	-		
Gray Scale						7	
Color Gamut	sRGB	95%	100%	-	-		

Product Specification

- Note)
 1. It should be measured in the center of screen(1 Point). Contrast Ratio(CR) is defined mathematically as

$$\text{Contrast Ratio(1 Point)} = \frac{\text{Surface Luminance with all white pixels}}{\text{Surface Luminance with all black pixels}}$$

2. Surface luminance is the average of 5 point across the LCD surface 50cm from the surface with all pixels displaying white. For more information see FIG 2.

$$L_{WH} = \text{Average}(1,2, \dots 5 \text{ Point})$$

3. The variation in surface luminance , The panel total variation (δ WHITE) is determined by measuring N at each test position 1 through 13 and then defined as following numerical formula. For more information see FIG 2.

$$\delta \text{ WHITE (5P)} = \frac{\text{Maximum (1,2, \dots 5 Point)}}{\text{Minimum (1,2, \dots 5 Point)}} \quad \delta \text{ WHITE (13P)} = \frac{\text{Maximum (1,2, \dots 13 Point)}}{\text{Minimum (1,2, \dots 13 Point)}}$$

4. Response time is the time required for the display to transition from black to white (rise time, Tr) and from white to black (falling time, Tf). For additional information see FIG 3.
5. It should be measured in the center of screen (1 Point). Color coordination must be measured with the equipment which has optical wavelength resolution of under 2nm. (ex. PR670, PR680, CS2000. ...)
6. Viewing angle is the angle at which the contrast ratio is greater than 10. The angles are determined for the horizontal or x axis and the vertical or y axis with respect to the z axis which is normal to the LCD surface. For more information see FIG 4.
7. Gray scale specification:

Gray Level	Luminance [%] (Typ)
L0	0.04
L31	0.57
L63	3.90
L95	11.14
L127	23.36
L159	37.84
L191	54.33
L223	77.60
L255	100.00

Product Specification

FIG. 2 Luminance

<Measuring point for Average Luminance & measuring point for Luminance variation>

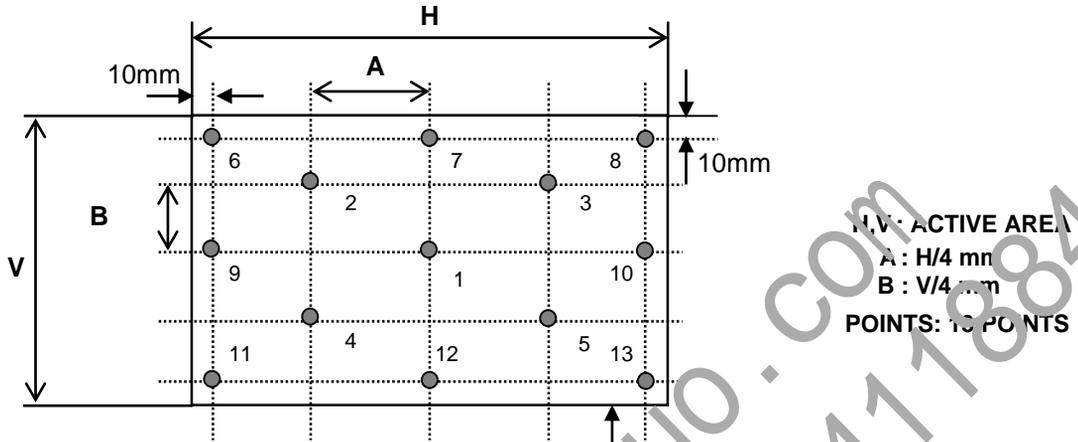


FIG. 3 Response Time

The response time is defined as the following figure and shall be measured by switching the input signal for "black" and "white".


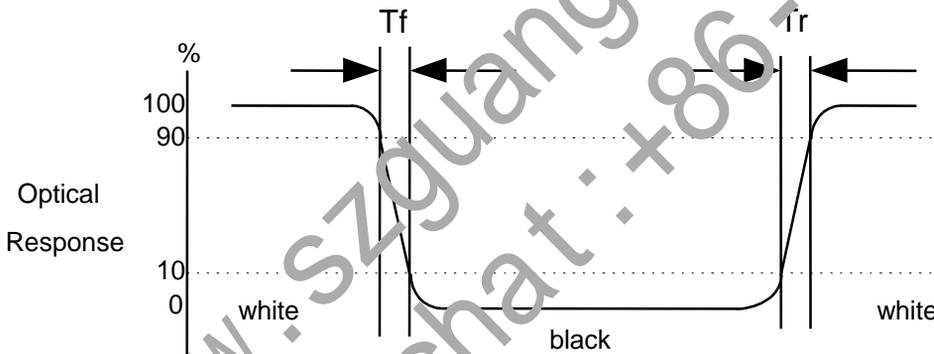


FIG. 4 Viewing angle

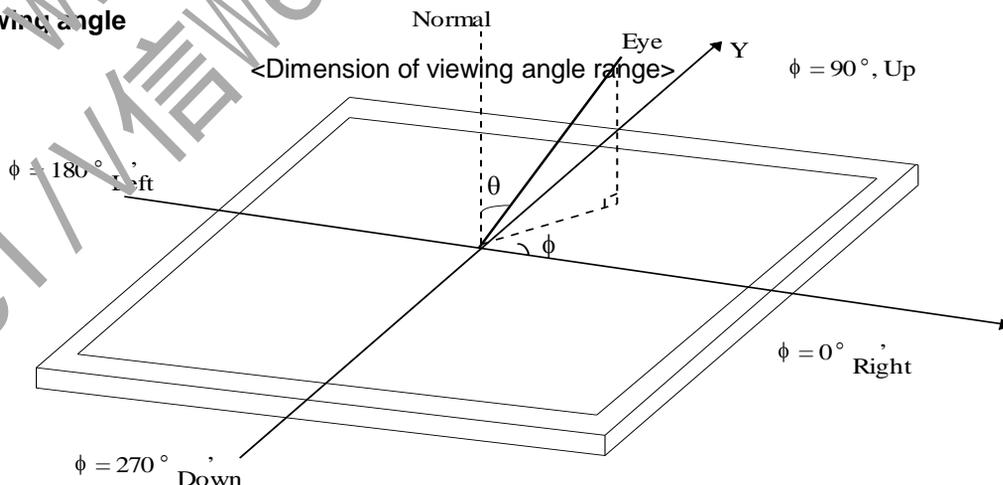

Product Specification

5. Mechanical Characteristics

The contents provide general mechanical characteristics for the model LP140WF9. In addition the figures in the next page are detailed mechanical drawing of the LCD.


Outline Dimension	Horizontal	315.81± 0.3 mm
	Vertical	186.30± 0.5 mm
	Thickness	2.40mm (max.)(Without PC 3A) 4.40mm (max.)(With PCBA)
Upper Polarizer Dimension	Horizontal	312.11 ± 0.3 mm
	Vertical	175.79 ± 0.2 mm
Active Display Area	Horizontal	305.31 ± 0.15 mm
	Vertical	173.99 ± 0.15 mm
Weight	230g (Max.)	
Surface Treatment	Anti-Glare treatment of the front polarizer	

Product Specification

<FRONT VIEW>

Notes (Measurement method refer to the Appendix D)

- 1) Unit[mm], General tolerance : $\pm 0.5\text{mm}$
- 2) All components except cover shield of LCM is under upper POL.

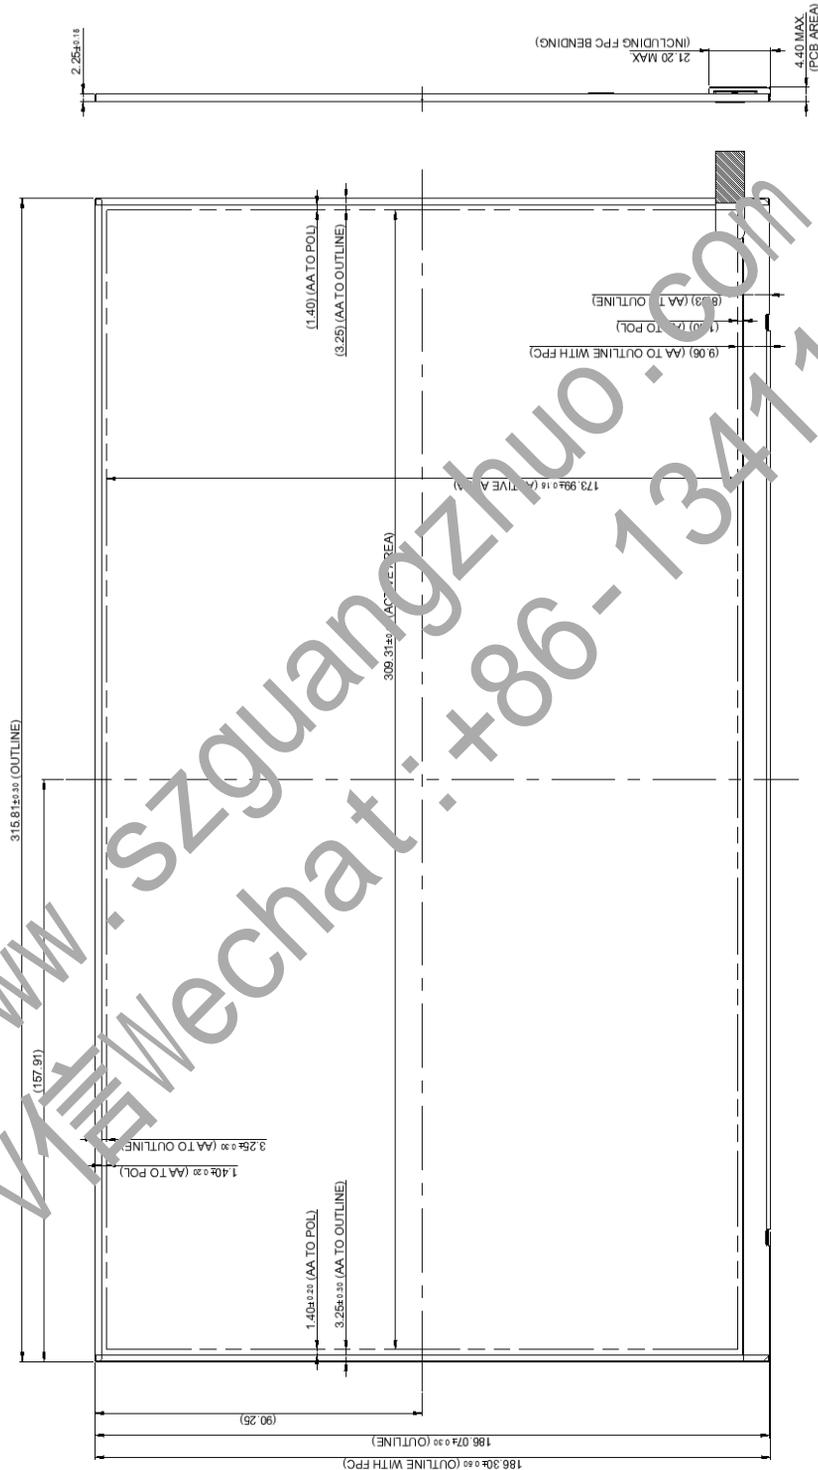


Product Specification

<REAR VIEW>

Notes

- 1) Unit[mm], General tolerance : $\pm 0.5\text{mm}$
- 2) LCM Label Information refer to the page 26.

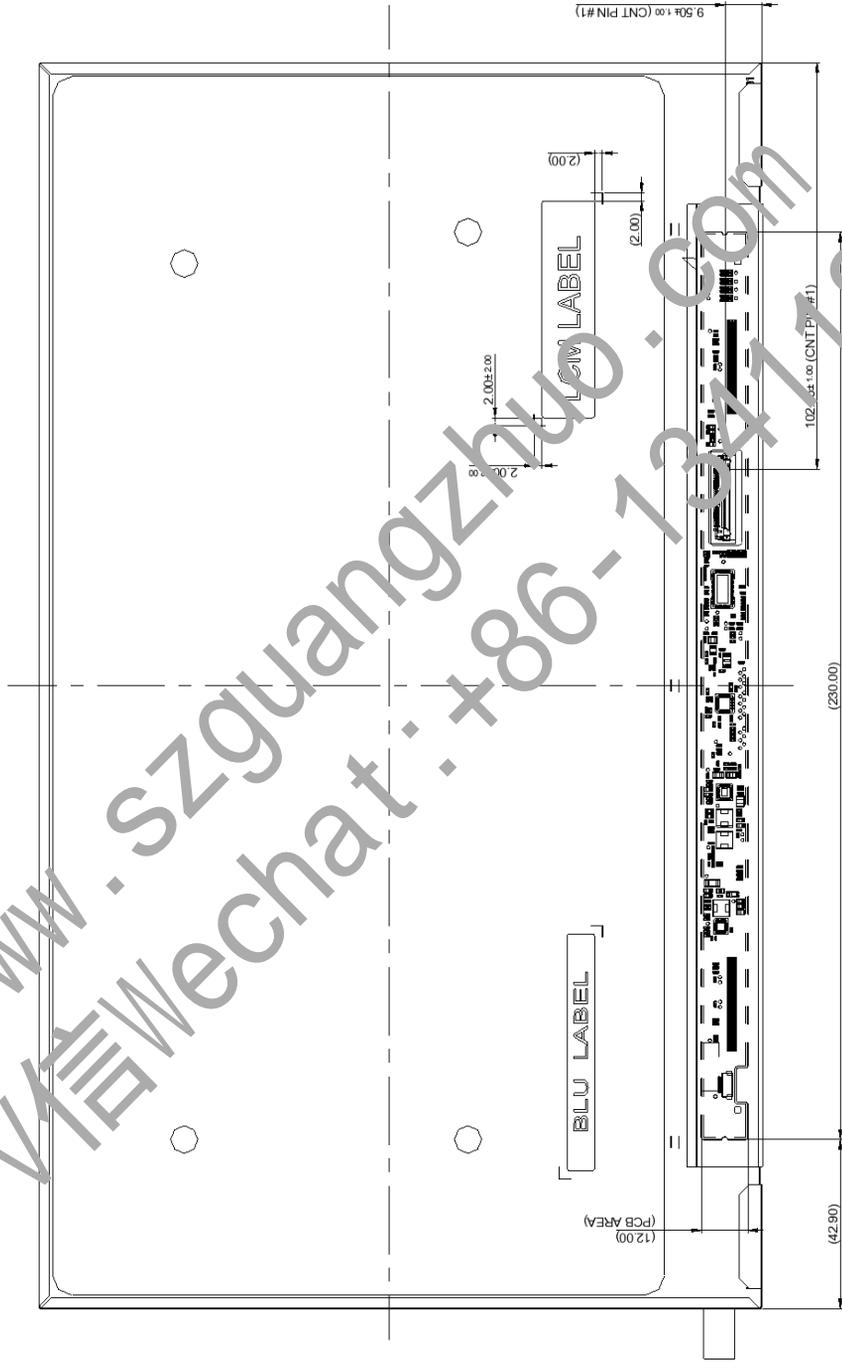

www.szguangzhuo.com
 Wechat: +86-13411884959
 Tel: +86-13411884959

Product Specification

6. Reliability

Environment test condition

No.	Test Item	Conditions
1	High temperature storage test	Ta= 60°C, 240h
2	Low temperature storage test	Ta= -20°C, 240h
3	High temperature operation test	Ta= 50°C, 50%RH, 240h
4	Low temperature operation test	Ta= 0°C, 240h
5	Vibration test (non-operating)	Random, 1.0Grms, 10 ~ 300Hz(PSD 0.0025) 3 axis, 30min/axis
6	Shock test (non-operating)	- No functional or cosmetic defects following a shock to all 6 sides delivering at least 180 G in a half sine pulse no longer than 2 ms to the display module - No functional defects following a shock delivering at least 200 g in a half sine pulse no longer than 2 ms to each of 6 sides. Each of the 6 sides will be shock tested with one each display, for a total of 6 displays
7	Altitude operating storage / shipment	0 ~ 10,000 feet (3,048m) 24Hr 0 ~ 40,000 feet (12,192m) 24Hr
8	ESD	± 8kV for contact discharge ± 15kV for air discharge

[Result Evaluation Criteria]

1. Comparing the initial functional FOS status, there should be no major change which might affect the practical display function when the display reliability test is conducted.
2. After conduct reliability test, LGD guarantees only functional FOS quality.
3. In the Reliability Test, Confirm performance after leaving in room temp.
4. In the standard condition, there shall be no practical problems that may affect the display function 24 hours later after reliability test. After the reliability test, we can guarantee the product only when the corrosion is causing its malfunction. The corrosion causing no functional defect can not be guaranteed.

※ Remark: MTBF (Excluding the LED) 50,000 hours with a confidence level 90%
(Based on 60°C, 1,000 hours Reliability Test with 10pcs LCM)



Product Specification

7. International Standards

7-1. Safety

- a) UL 60950-1, Underwriters Laboratories Inc.
Information Technology Equipment - Safety - Part 1 : General Requirements.
- b) CAN/CSA-C22.2 No. 60950-1-07, Canadian Standards Association.
Information Technology Equipment - Safety - Part 1 : General Requirements.
- c) EN 60950-1, European Committee for Electro technical Standardization (CENELEC).
Information Technology Equipment - Safety - Part 1 : General Requirements.
- d) IEC 60950-1, The International Electro technical Commission (IEC).
Information Technology Equipment - Safety - Part 1 : General Requirements.

7-2. Environment

- a) RoHS, Directive 2011/65/EU of the European Parliament and of the Council of 8 June 2011

Product Specification

8. Packing

8-1. Designation of Lot Mark

[DETAIL INFORMATION OF PPID LABEL AND REVISION CODE]



1) MFG ID :

It is subject to change with BLU assembly company.
 Please refer to the below table for detail.

BLU assembly company	MFG ID
NJ Heesung	HMNLG
NJ Starion	ZSNLG
King Display	KLBLG

2) PPID Label Revision :

It is subject to change with Dell event. Please refer to the below table for detail.

Classification	No Change	1st Revision	2nd Revision	...	9th Revision	...
SST(WS)	X00	X01	X02	...	X09	...
PT(ES)	X10	X11	X12	...	X19	...
ST(CS)	X20	X21	X22	...	X29	...
XB(MP)	A00	A01	A02	...	A09	...

Country of Origin	Factory ID
CN: China	LGDNJ
KR: Korea	-

Product Specification

a) Lot Mark

A	B	C	D	E	F	G	H	I	J	K	L	M
---	---	---	---	---	---	---	---	---	---	---	---	---

A,B,C : SIZE(INCH)

E : MONTH

D : YEAR

F ~ M : SERIAL NO.

Note

1. YEAR

Year	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029
Mark	K	L	M	N	P	R	S	T	U	V

2. MONTH

Month	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Mark	1	2	3	4	5	6	7	8	9	A	B	C

b) Location of Lot Mark

Serial No. is printed on the label. The label is attached to the backside of the LCD module.
This is subject to change without prior notice.


8-2. Packing Form

a) Package quantity in one box : 20ea


b) Box Size : 410 x 278 x 244[mm]

Product Specification

8-3. Packing Assembly

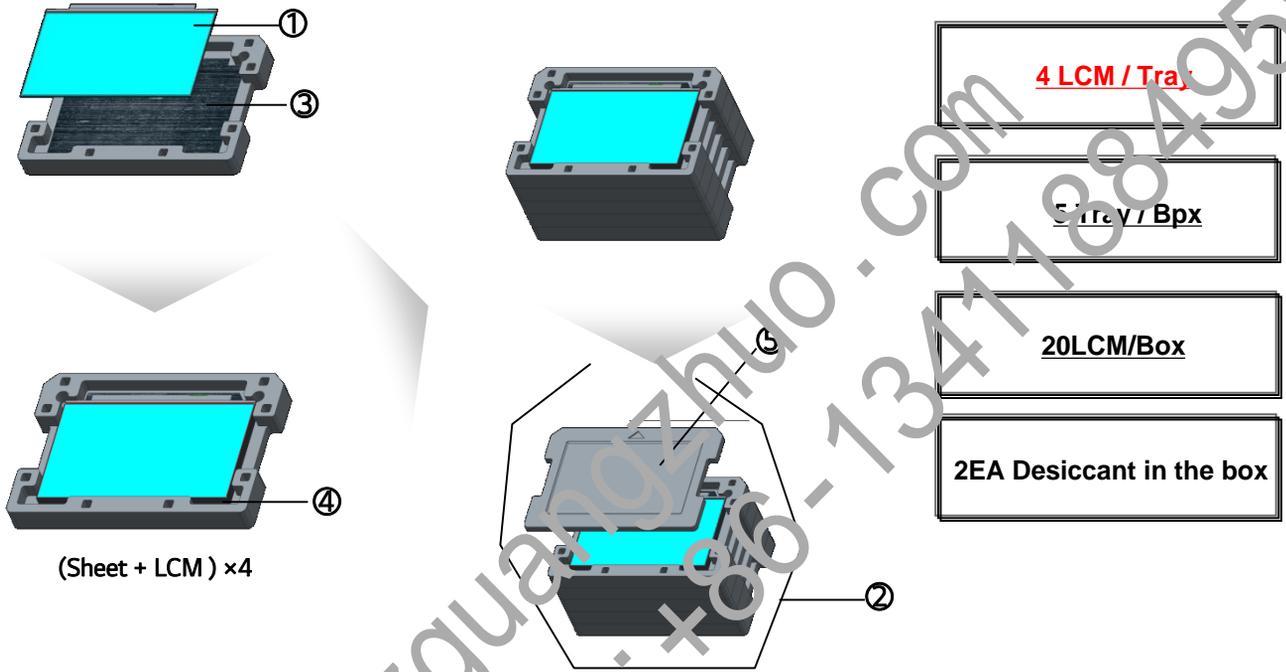


NO.	DESCRIPTION	MATERIAL
1	LCD Module	
2	BAG	AL
3	Sheet	PE
4	Bottom Tray	EPO
5	Top Tray	EPO
6	BOX	SWR4
7	TAPE	OPP 70MMX300M
8	LABEL	ART 100X70

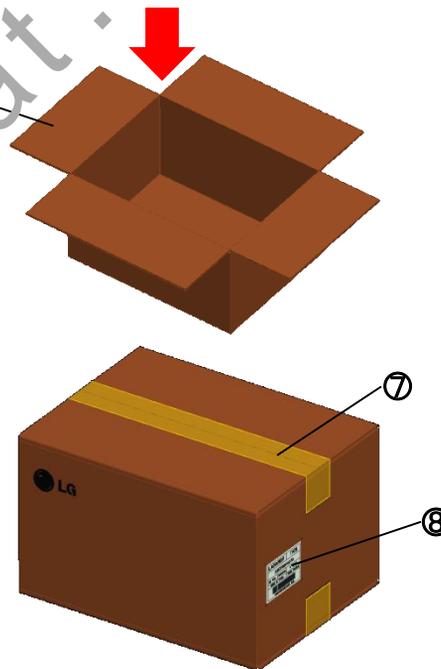


8-3. Packing Assembly (Pallet)


1. Pallet Ready

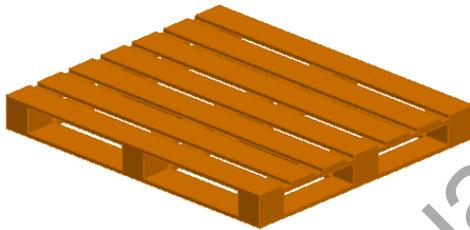

2. 4 x 2 x 4 Box Pattern

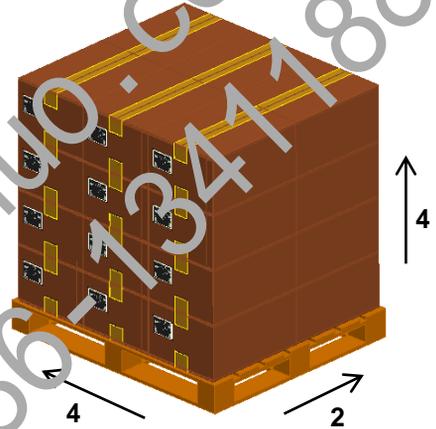

3. Angle Packing & Taping

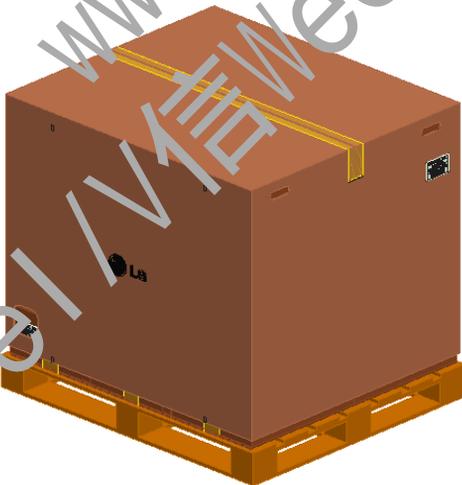

4. Banding







Product Specification

8-3. Precautions for unpacking the Box


a.) Don't throw or tilt the box and put it on a flat surface.

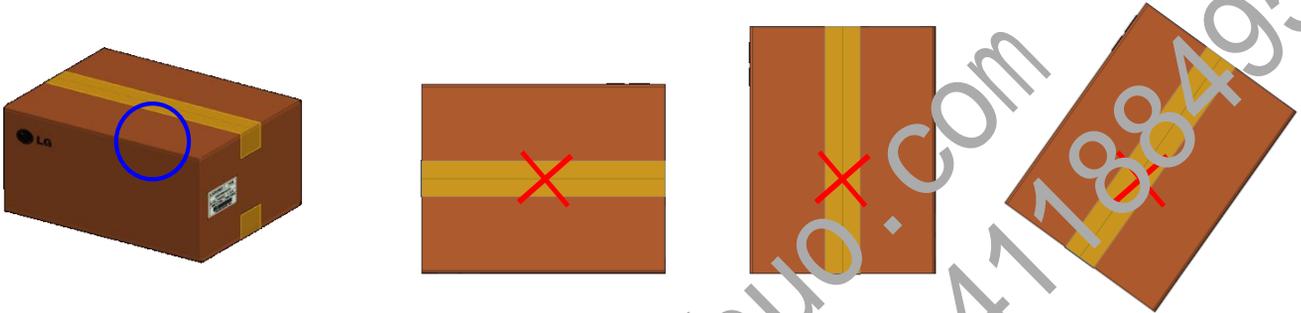

b.) Place the box on a flat floor and Take out the AL bag vertically.

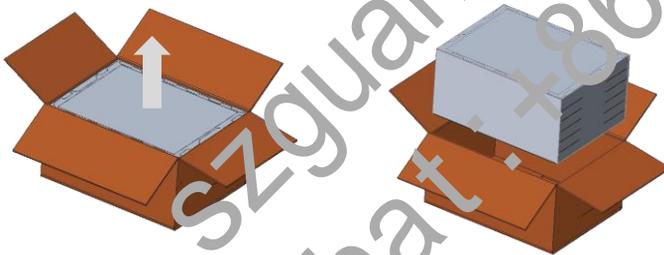



c.) Cut the tape on the side of the bag with a knife and Take out the tray horizontally.

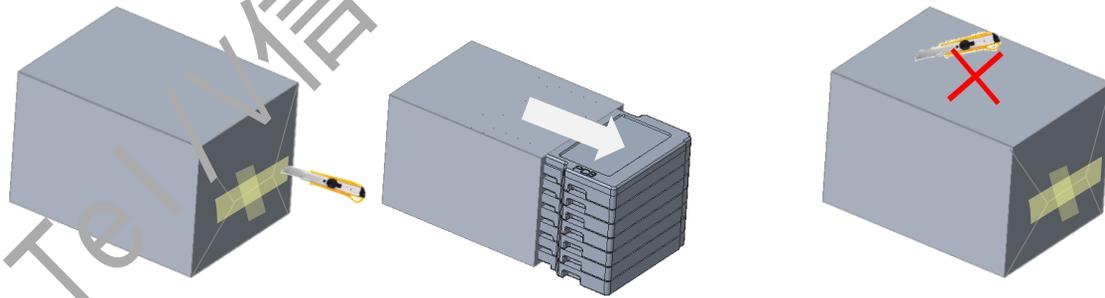

**Caution : Do not cut the top of the bag with a knife.
(The Knife can damage product)**



8-4. Precautions for Handling tray

a.) Hold center of short or long side of the tray with both hands when handling one or more trays.

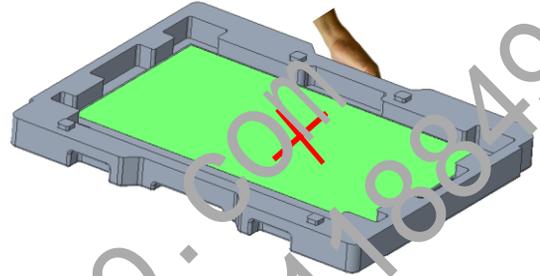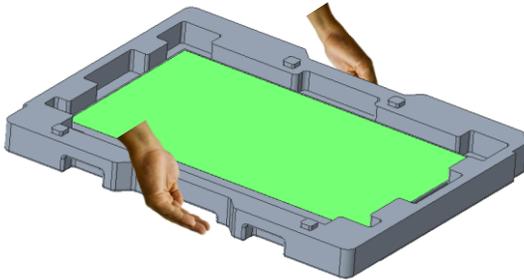


Caution . Do not handle with only one hand.

b.) Always place tray on flat surface and Don't tilt with one hand to take out.

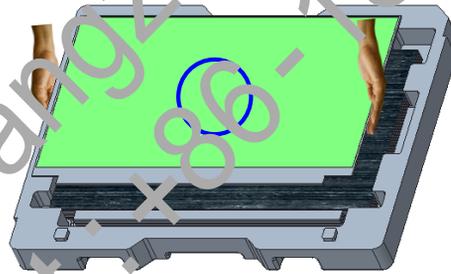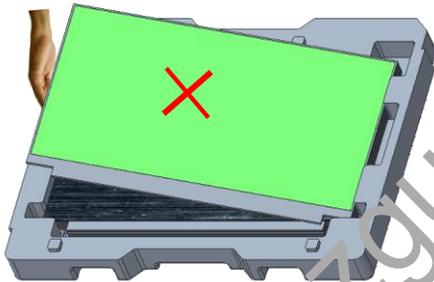

c.) When stacking trays, Please align same position of the protrusion of each tray.

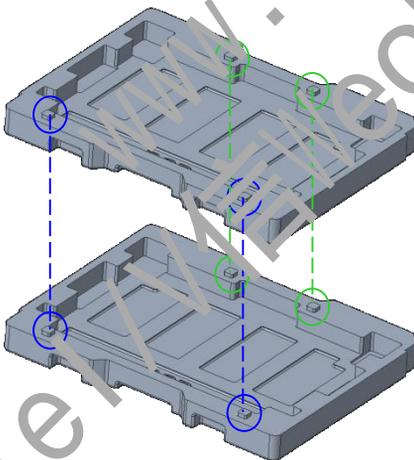

**If not Aligned,
 The tray may slip without being loaded.**

d.) The maximum stacking quantity is equal to the number of loads per box.
 - Recommended as above because heavier weight can cause muscular skeletal disease and operator handling errors.

Product Specification

9. PRECAUTIONS

Please pay attention to the followings when you use this TFT LCD module.

9-1. MOUNTING PRECAUTIONS

- (1) You must mount a module using holes arranged in four corners or four sides.
- (2) You should consider the mounting structure so that uneven force (ex. Twisted stress) is not applied to the module. And the case on which a module is mounted should have sufficient strength so that external force is not transmitted directly to the module.
- (3) Please attach the surface transparent protective plate to the surface in order to protect the polarizer. Transparent protective plate should have sufficient strength in order to resist external force.
- (4) You should adopt radiation structure to satisfy the temperature specification.
- (5) Acetic acid type and chlorine type materials for the cover case are not desirable because the former generates corrosive gas of attacking the polarizer at high temperature and the latter causes circuit break by electro-chemical reaction.
- (6) Do not touch, push or rub the exposed polarizers with glass, tweezers or anything harder than HB pencil lead. And please do not rub with dust clothes with chemical treatment. Do not touch the surface of polarizer for bare hand or greasy cloth. (Some cosmetics are detrimental to the polarizer.)
- (7) When the surface becomes dusty, please wipe gently with absorbent cotton or other soft materials like chamois soaks with petroleum benzene. Normal-hexane is recommended for cleaning the adhesives used to attach front / rear polarizers. Do not use acetone, toluene and alcohol because they cause chemical damage to the polarizer.
- (8) Wipe off saliva or water drops as soon as possible. Their long time contact with polarizer causes deformations and color fading.
- (9) Do not open the case because inside circuits do not have sufficient strength.
- (10) When handling the LCD module, it needs to handle with care not to give mechanical stress to the PCB and Mounting Hole area.

9-2. OPERATING PRECAUTIONS

- (1) The spike noise causes the misoperation of circuits. It should be lower than following voltage :
 $V = \pm 200mV$ (Over and under shoot voltage)
- (2) Response time depends on the temperature. (In lower temperature, it becomes longer.)
- (3) Brightness depends on the temperature. (In lower temperature, it becomes lower.)
And in lower temperature, response time (required time that brightness is stable after turned on) becomes longer.
- (4) Be careful for condensation at sudden temperature change. Condensation makes damage to polarizer or electrical contacted parts. And after fading condensation, smear or spot will occur.
- (5) When fixed patterns are displayed for a long time, remnant image is likely to occur.
- (6) Module has high frequency circuits. Sufficient suppression to the electromagnetic interference shall be done by system manufacturers. Grounding and shielding methods may be important to minimized the interference.

Product Specification**9-3. ELECTROSTATIC DISCHARGE CONTROL**

Since a module is composed of electronic circuits, it is not strong to electrostatic discharge. Make certain that treatment persons are connected to ground through wrist band etc. And don't touch interface pin directly.

9-4. PRECAUTIONS FOR STRONG LIGHT EXPOSURE

Strong light exposure causes degradation of polarizer and color filter.

9-5. STORAGE

When storing modules as spares for a long time, the following precautions are necessary:

- (1) Store them in a dark place. Do not expose the module to sunlight or fluorescent light. Keep the temperature between 5°C and 35°C at normal humidity.
- (2) The polarizer surface should not come in contact with any other object.
It is recommended that they be stored in the container in which they were shipped.


9-6. HANDLING PRECAUTIONS FOR PROTECTION FILM

- (1) When the protection film is peeled off, static electricity is generated between the film and polarizer. This should be peeled off slowly and carefully by people who are electrically grounded and with well ion-blown equipment or in such a condition, etc.
- (2) The protection film is attached to the polarizer with a small amount of glue. If some stress is applied to rub the protection film against the polarizer during the time you peel off the film, the glue is apt to remain on the polarizer.
Please carefully peel off the protection film without rubbing it against the polarizer.
- (3) When the module with protection film attached is stored for a long time, sometimes there remains a very small amount of glue still on the polarizer after the protection film is peeled off.
- (4) You can remove the glue easily. When the glue remains on the polarizer surface or its vestige is recognized, please wipe them off with absorbent cotton waste or other soft material like chamois soaked with normal-hexane.

9-7. THE LGD QA RESPONSIBILITY WILL BE AVOIDED IN CASE OF BELOW



- (1) When the customer attaches TSM(Touch Sensor Module) on LCM without Supplier's approval.
- (2) When the customer attaches cover glass on LCM without Supplier's approval.
- (3) When the LCMs were repaired by 3rd party without Supplier's approval.
- (4) When the LCMs were treated like Disassemble and Rework by the Customer and/or Customer's representative without supplier's approval.

APPENDIX A. LGD Proposal for system cover design

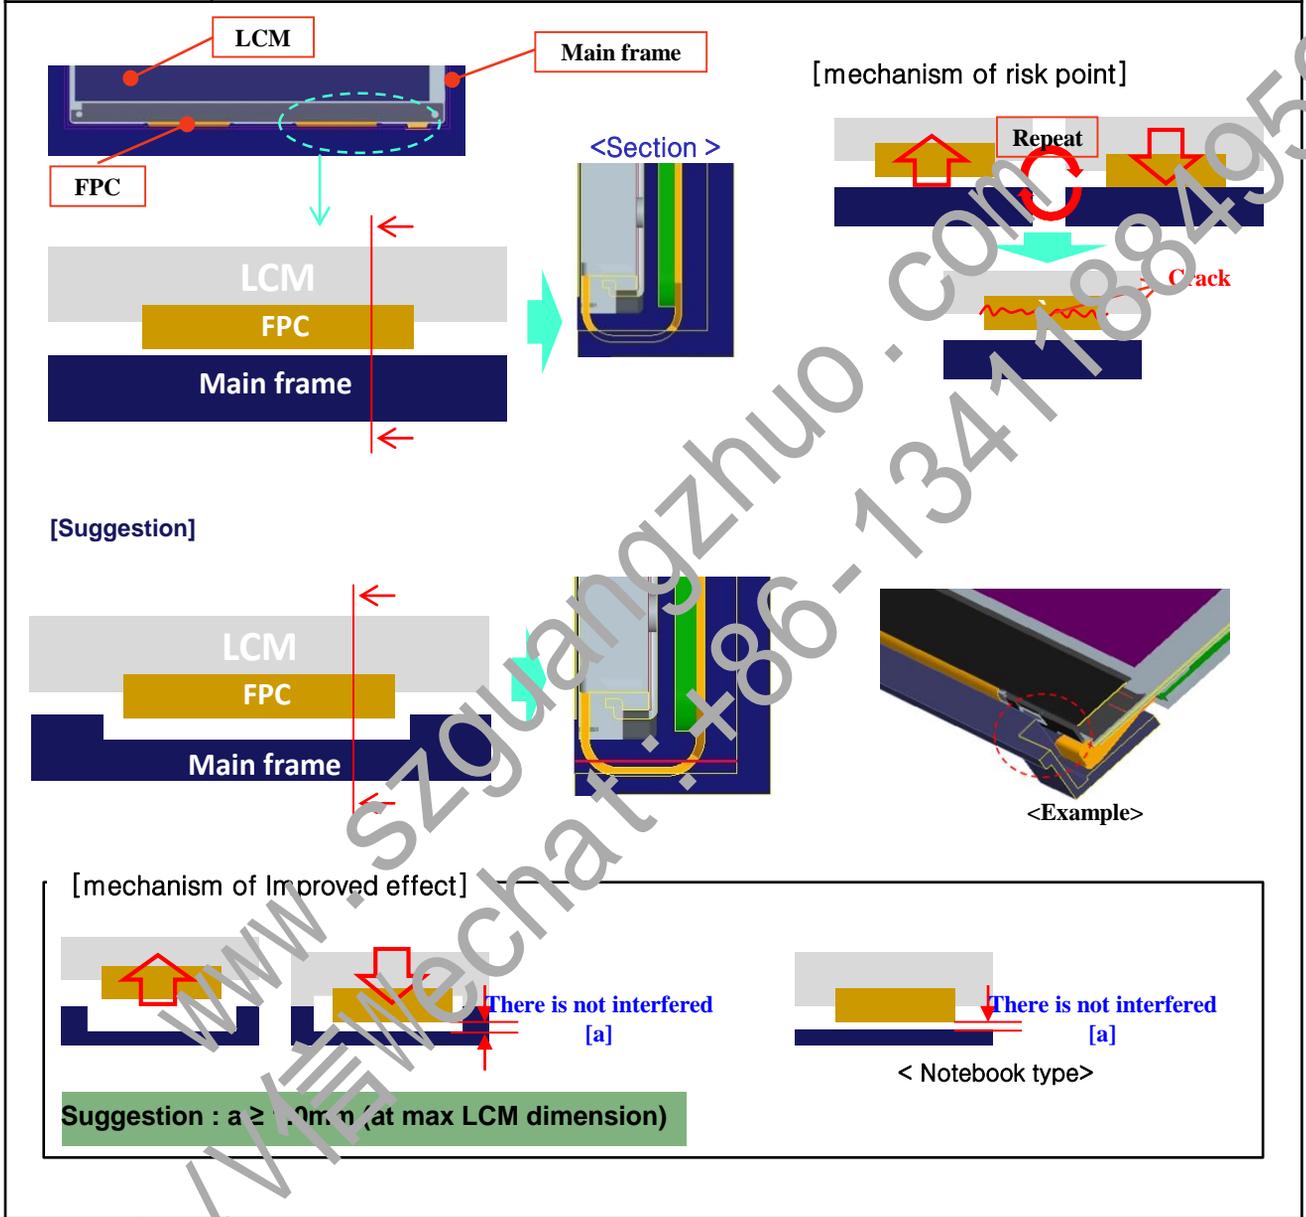1	FPC escape figure
 <p>[mechanism of risk point]</p> <p>[Suggestion]</p> <p>[mechanism of Improved effect]</p> <p>Suggestion : $a \geq 1.0\text{mm}$ (at max LCM dimension)</p>	
Risk point	<p>FPC is easily cracked by interference between FPC and frame during repetitive external shock or vibration.</p> <p>It is also happened when gap between is exist.</p>
Suggestion	<p>FPC crack can be improved by add escape figure at middle frame</p> <p>The gap is recommended to keep more than 1.0mm</p>

Product Specification

APPENDIX A. LGD Proposal for system cover design
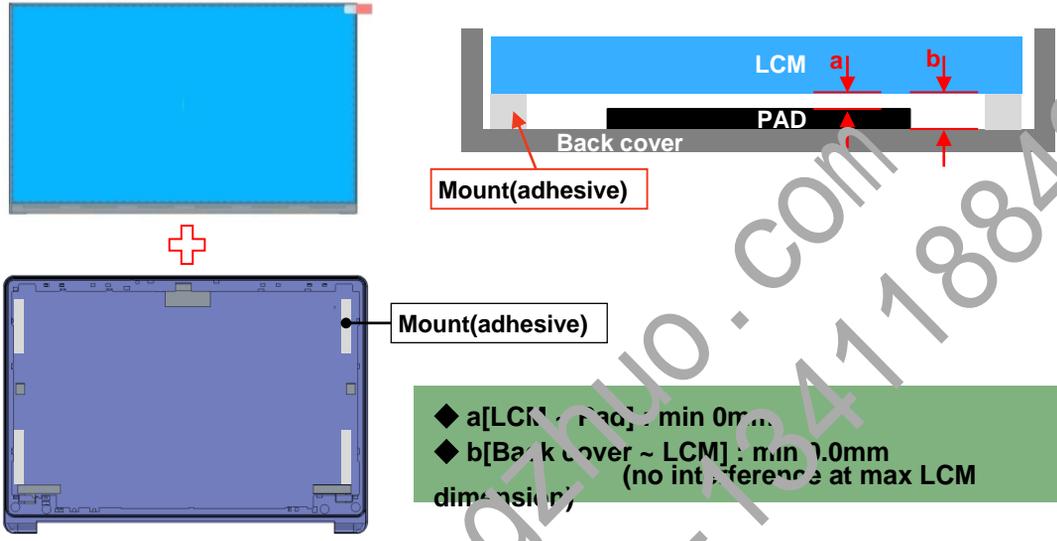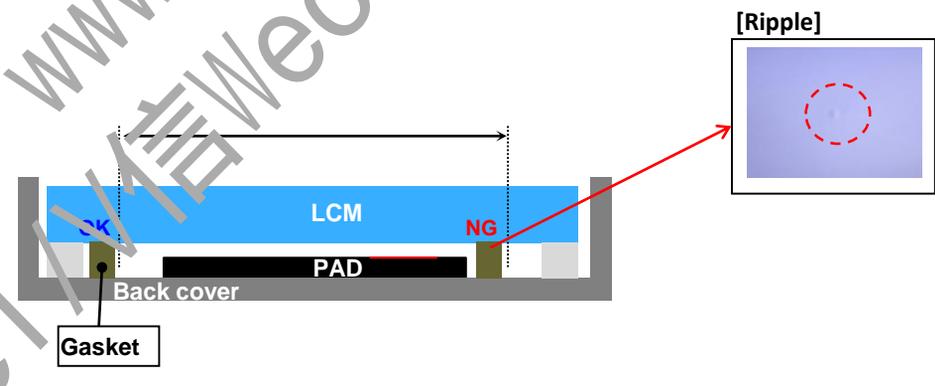
<p>2</p>	<p>Gap check for securing the enough gap between LCM and System back cover.</p>
 <p>◆ a[LCM ~ Pad] : min 0mm ◆ b[Back cover ~ LCM] : min 0.0mm (no interference at max LCM dimension)</p>	
<p>Risk point</p>	<p>Rear side of LCM is sensitive against external stress, and previous check about interference is highly needed.</p>
<p>Suggestion</p>	<p>In case there is something from system cover comes into the boundary above, mechanical interference may cause the FOS defects. (ex: Ripple, White spot..)</p>
<p>3</p>	<p>Gasket position</p>
	
<p>Risk point</p>	<p>Ripple or white spot can be happened by interference between pad and LCM when gap is not enough.</p>
<p>Suggestion</p>	<p>It is recommended that gasket is posited out of active area .</p>

APPENDIX A. LGD Proposal for system cover design

<p>4</p>	<p>Checking the path of the System cables</p>
<p>The diagrams illustrate the problem of camera cable placement on the back cover. The top left shows a camera cable protruding from the back cover. The top right shows a panel with a crack at 'a', a white spot at 'b', and light leakage at 'c'. Below these are three images: a cracked panel, a white spot, and an IPS model showing light leakage at a black pattern. A cross-section shows the back cover and LCM with concentrated stress at the cable contact point. The bottom section provides suggestions: [Cable path] showing the cable outside the LCM, [Add pad] showing pads on both sides of the cable, and [Add cut] showing an escape cut on the back cover with a section B-B' and the requirement that the escape cut depth equals the cable thickness.</p>	
<p>Risk point</p>	<p>LCM is easily damage by camera cable when cable is protruded from back cover.</p> <p>It is caused panel crack or white spot by concentrated stress and light leakage by panel bending at IPS model.</p> <p>It is recommended that camera cable path put outside of LCM.</p> <p>It is recommended that pad is added at both side of cable.</p> <p>Suggestion</p> <p>If cable path must be cross middle area of system, @slim & narrow bezel</p> <ol style="list-style-type: none"> 1) Cable type is recommended to use flexible (Use FPC type). 2) Add escape cut on back cover and add round at the edge of cut <p>Depth of escape cut recommended to set the same as FPC thickness.</p>

Product Specification

APPENDIX A. LGD Proposal for system cover design

5	Check the wire position(path)
<p>The diagrams illustrate the correct and incorrect wire placement on a back cover. The top diagram shows a wire (purple) positioned away from a hook (black circle), labeled 'OK'. The bottom diagram shows a wire positioned near a hook, labeled 'NG'.</p>	
Risk point	It is necessary that wire is posited out of hook, not posited near hook,.
Suggestion	If wire is posited near hook, it can be happened assemble error and panel crack during assemble front cover

www.szguangzhuo.com
 Tel/Wechat: +86-13411884959


Product Specification

APPENDIX A. LGD Proposal for system cover design

6	System rib (on A cover)
Risk point	Gap is too small and rib is too short, panel is easily cracked by external stress.
Suggestion	Gap is must be kept more than 0.5mm(max dim.) and 1.0mm(typ dim.) . The figure of rib is continuous or fully long. "a" is not enough as narrow bezel type, add damper between LCM and system rib/wall


Product Specification

APPENDIX A. LGD Proposal for system cover design

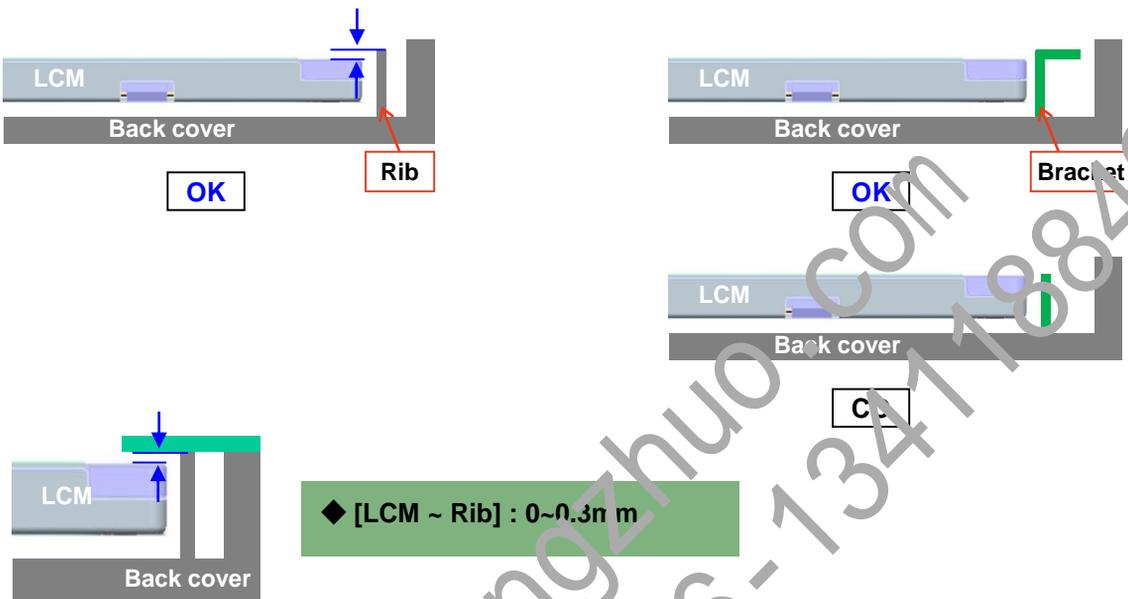7	Check the rib or Bracket on back cover
 <p>The diagrams illustrate the correct and incorrect ways to attach the LCM to the back cover. The top-left diagram shows a 'Rib' on the back cover that is taller than the LCM, labeled 'OK'. The top-right diagram shows a 'Bracket' on the back cover that is taller than the LCM, also labeled 'OK'. The bottom-left diagram shows a 'Bracket' on the back cover that is shorter than the LCM, labeled 'NG'. A green box contains the text: ◆ [LCM ~ Rib] : 0~0.3mm</p>	
Risk point	It is necessary that the height of back cover rib or bracket is higher than LCM height. It can prevent direct compression of panel at LCM edge.
Suggestion	<p>”┌” shape bracket is stronger than ”I” shape one.</p> <p>It is recommended that rib height is same or more with LCM height.</p> <p>In this case it must be considered light leakage at front cover, too.</p>

Product Specification

APPENDIX A. LGD Proposal for system cover design

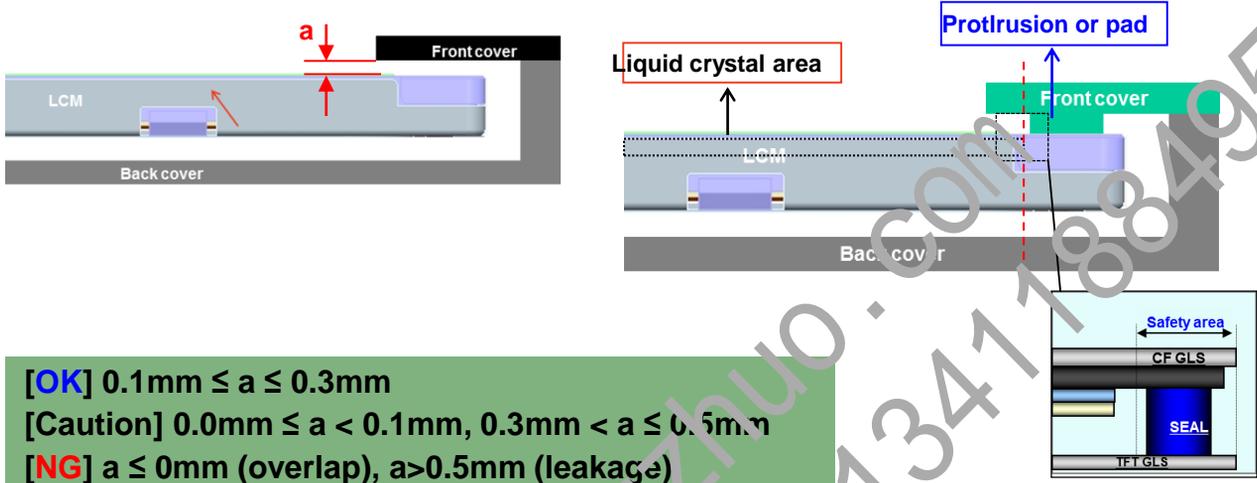8	Check the gap between front cover and LCM(glass)
 <p data-bbox="107 724 921 859"> [OK] $0.1\text{mm} \leq a \leq 0.3\text{mm}$ [Caution] $0.0\text{mm} \leq a < 0.1\text{mm}$, $0.3\text{mm} < a \leq 0.5\text{mm}$ [NG] $a \leq 0\text{mm}$ (overlap), $a > 0.5\text{mm}$ (leakage) </p>	
Risk point	Ripple can be happened by little gap between glass and front cover.
Suggestion	Keep the gap between front cover and LCM from 0.1 to 0.3mm Ripple is prevented by add protrusion shape at the back side of front cover. In this case, protrusion must be created outside of liquid crystal area

Product Specification

APPENDIX A. LGD Proposal for system cover design

9	Check mouse pad (touch pad) depth and shape of edge
<p>Mouse pad</p> <p>[OK] $a \leq 0.3\text{mm}$ [Caution] $0.5\text{mm} \geq a \geq 0.3\text{mm}$ [NG] $a \geq 0.5\text{mm}$</p>	
Risk point	Mouse pad step is deep, it is caused panel crack by external load.
Suggestion	The edge shape must be smooth.




10	Check the step of keyboard area
<p>Keyboard</p> <p>push</p> <p>crack</p> <p>[OK] [NG]</p>	
Risk point	The step of keyboard at the side edge of main body, it is caused panel crack
Suggestion	Keep to flat out side of keyboard.

APPENDIX A. LGD Proposal for system cover design

<p>11</p>	<p>The position and shape of keyboard step</p>
<p>[Suggestion]</p>	
<p>Risk point</p>	<p>Keyboard edge is sharp (a right angle), panel is get concentrated stress, by external force at this edge.</p> <p>Especially, keyboard edge is aligned with panel edge (single-TFT area), crack risk is seriously increase.</p> <p>Suggestion</p> <p>It is recommended that keyboard edge is posited to avoid single-TFT area.</p> <p>It is recommended that edge shape of touch pad is rounded.</p>

Product Specification

APPENDIX A. LGD Proposal for system cover design

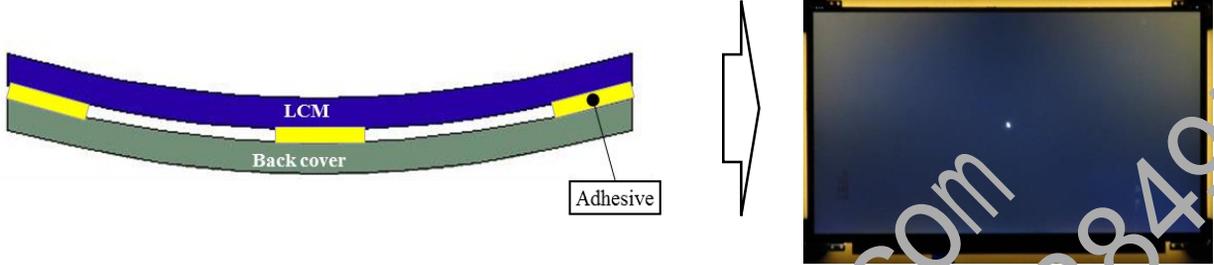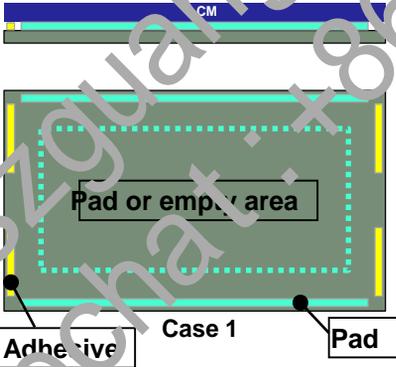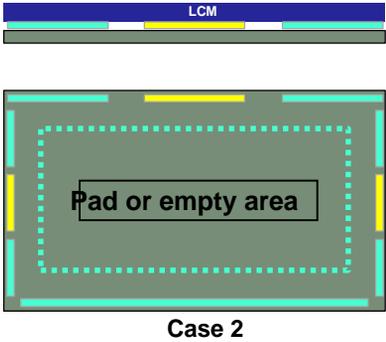12	. LCM fixing (no flange model)
 <p>[Suggestion]</p> <p>Flat </p> <p>Adhesive width </p> <p>Position of pad & adhesive</p> <div style="display: flex; justify-content: space-around;"> <div data-bbox="472 929 868 1296">  <p>Case 1</p> </div> <div data-bbox="919 929 1305 1271">  <p>Case 2</p> </div> </div> <p>[Mapping on back cover]</p>	
Risk point	<p>In IPS model, bended LCM, light leakage of IPS (mura) is happened. LCM is bended by below condition.</p> <ol style="list-style-type: none"> 1. Back cover is not flat or distorted. 2. LCM is fixed by adhesive at center area. 3. Adhesive width is too large.
Suggestion	<p>It is recommended that back cover is flat type.</p> <p>Adhesive width need to be minimized if adhesive strength is enough.</p> <p>It is recommended that adhesive is posited at outside on back-cover. Pad is recommended to apply at other area.</p>


APPENDIX B. LGD Proposal for eDP Interface Design Guide

<p>1</p>	<p>HPD Signal recognition</p>
<div style="display: flex; justify-content: space-around;"> <div data-bbox="107 382 721 782"> <p>Abnormal AUX communication by system HPD glitch recognition</p> </div> <div data-bbox="735 382 1349 782"> <p>Normal AUX communication by system HPD recognition</p> </div> </div> <div style="display: flex; justify-content: space-around; margin-top: 10px;"> <p>[Abnormal Communication By HPD Glitch]</p> <p>[Normal Communication By HPD Signal]</p> </div>	
<p>Define</p>	<ol style="list-style-type: none"> Hot Plug Detection (HPD) Threshold level of Source Device is minimum 2.0V HPD Unplug : HPD pulse stay low longer than 2ms. DP Tx shall wait for HPD signal to go high again. “HPD High” is confirmed only after HPD has been asserted continuously for 100msec.
<p>2</p>	<p>IRQ (Interrupt Request) HPD Pulse Definition</p>
<div style="display: flex; align-items: center;"> <div data-bbox="107 1226 321 1661" style="writing-mode: vertical-rl; transform: rotate(180deg);"> <p>Ex) HPD Pulse</p> </div> <div data-bbox="328 1226 1306 1661"> </div> </div>	
<p>Define</p>	<p>Upon detection this “HPD IRQ Event”(0.5ms ~ 1ms) ,the source device must read the link / sink status field of the DPCD and take corrective action.</p>


Product Specification

APPENDIX B. LGD Proposal for eDP Interface Design Guide

3 Main Link EYE Diagram

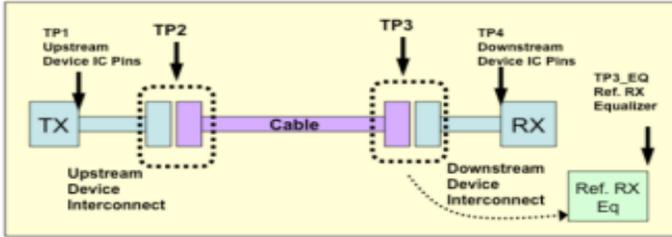


[EYE Diagram]

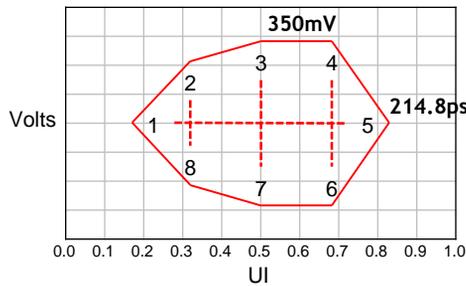

Point	UI	Voltage (Volts)
1	0.210	0.000
2	0.355	0.140
3	0.500	0.175
4	0.645	0.175
5	0.790	0.000
6	0.645	-0.175
7	0.500	-0.175
8	0.355	-0.140

[EYE Vertices for TP2 at HBR]

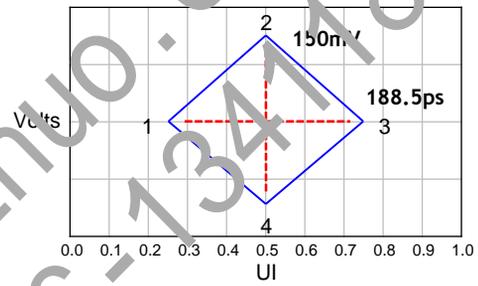

Point	UI	Voltage (Volts)
1	0.246	0.000
2	0.500	0.075
3	0.755	0.000
4	0.500	-0.075

[EYE Vertices for TP3 at HBR]

Define Main Link EYE Diagram should meet TP2 and TP3 point

4 Cable Impedance management




Segment	Differential Impedance	Maximum Tolerance
Fixture	100 Ω	+/- 10%
Connector	100 Ω	
Wire management	100 Ω	
Cable	100 Ω	+/- 5%

Define Cable Impedance 100 Ω +/- 5% (95Ω ~ 105Ω)

Product Specification

APPENDIX B. LGD Proposal for eDP Interface Design Guide

5 Main Link Off vs. LCD Power Off at Non-PSR

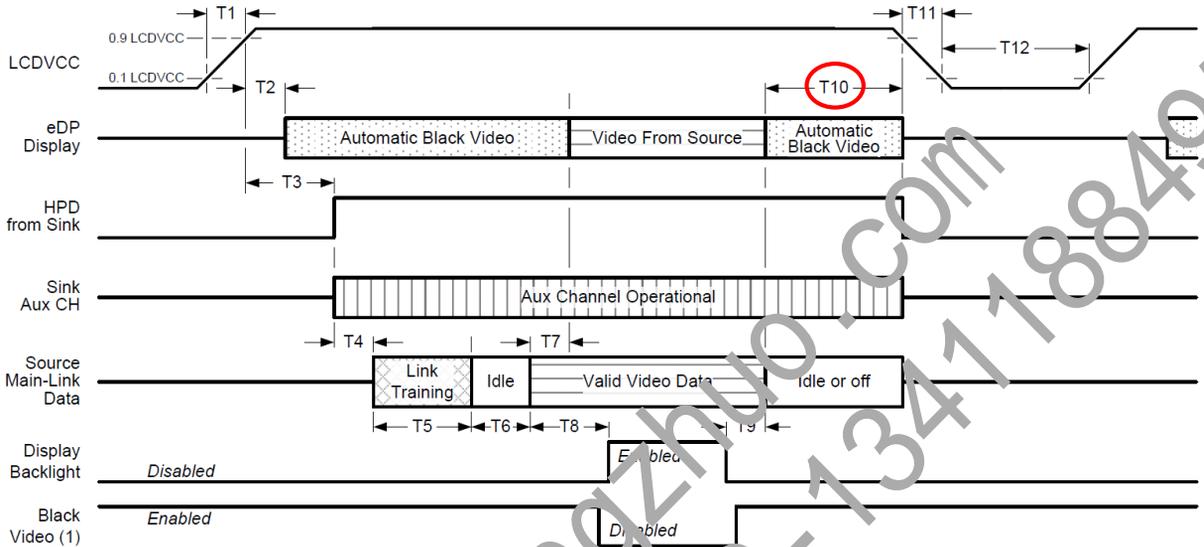

Timing Parameter	Description	Required By	Min	Max
T10	Delay from end of valid video from Source to Power Off	Source	0ms	500ms

* LGD recommend that Source must power off the LCDVCC if Main Link off like below.



[Case1. Resolution Change]



[Case2. Close the Lid]

Define If Main Link off signal from Source, then LCDVCC must be Power Off within T10 period at Non-PSR mode

APPENDIX B. LGD Proposal for eDP Interface Design Guide

6	Main Link M & N value of MSA data
<p>The diagram shows the timing relationship between LCDVCC, HPD, AUX, and Main link. LCDVCC rises first. HPD then rises. On the AUX line, a 'Read the EDID' pulse occurs, followed by 'Link Training' which includes 'Training Pattern 1'. The 'Main link' signal then carries 'VIDEO Data' consisting of five frames. A 'Main Stream Attribute (MSA) Data' block is positioned below the frames, with arrows indicating its data is sent before each frame. A red dashed box highlights the 'Link Training' period. A note at the bottom of the diagram specifies: '- Video Timing information: Vtotal, Vtotal, Hwidth, Hstart, Vstart, Hsync width, Hsync polarity, etc.' and '- Pixel Frequency information: M & N Value'.</p>	
Define	It need to fix M& N value of MSA data output to prevent the initial abnormal M& N Value from incoming after power on.

www.szguangzhuo.com
 Wechat: +86-18849591847


Product Specification

APPENDIX B. LGD Proposal for eDP Interface Design Guide


7 PSR Exit

If link training is not required, the Source must begin transmitting data on the Main Link prior to the wake AUX command which occurs through writing 01h to the SET_POWER & SET_DP_PWR_VOLTAGE register (DPCD Address 00600h; see DP v1.2a), as illustrated in the upper portion of Figure 6-9. This transmitted data must be a repetition of D10.2 symbols (which is the same as Link Training Pattern 1). Note the requirement above to transmit five repeats of the Idle Pattern after receiving ACK from the Sink.

PSR Exit Link Management with No Link Training

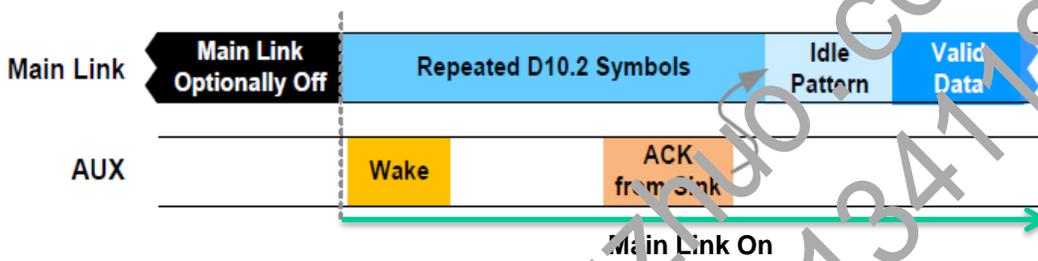

- The below waveform is the issued case

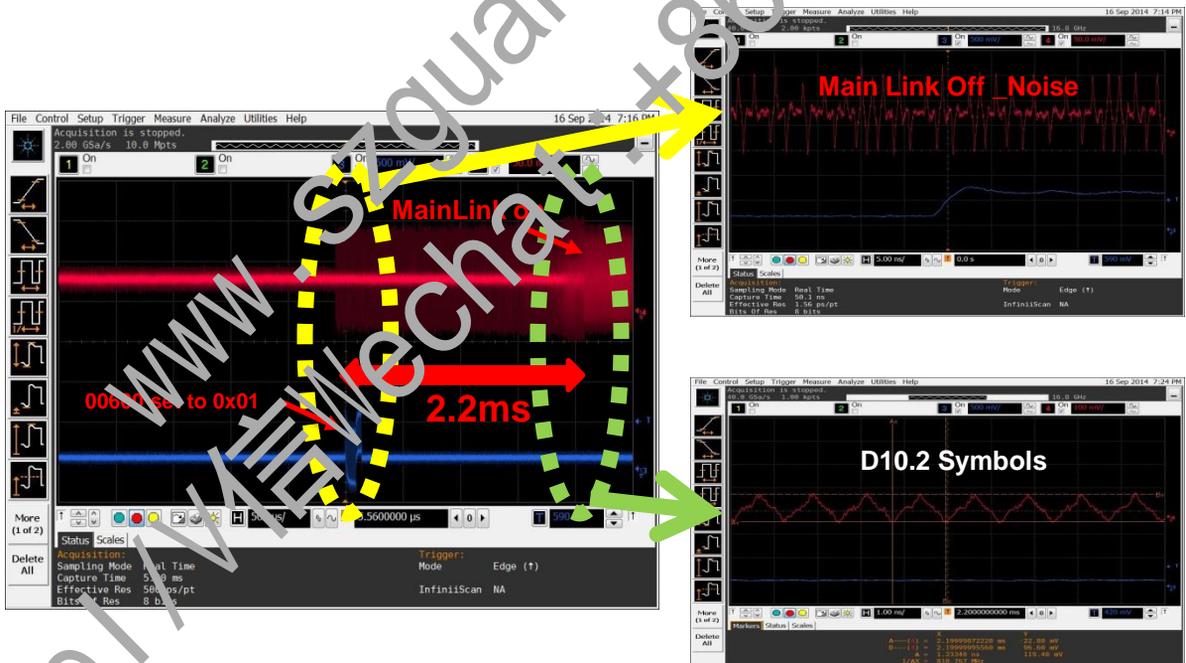

Define

If link training is not required, the source must begin transmitting data on the ML prior to the wake AUX wake-up command.

Product Specification


APPENDIX B. LGD Proposal for eDP Interface Design Guide

8	1st time PSR Entry after Power on
<p>< Issue waveform > < solution waveform ></p>	
<p>1. It is found that with solution , the TCON enter the PSR timing is 1.2s delay from VCC on which avoid TCON capture the wrong data from DP link (poor link quality) and enter the BIST mode + PSR mode(black screen).</p> <p>2. According to test, link is stable 800ms after VCC on.</p>	
Define	After power(Vcc) on, the DP link is not stable, so the source try to PSR entry at 800ms after Power(Vcc) on..

Product Specification

APPENDIX B. LGD Proposal for eDP Interface Design Guide

9 PSR Period Issue


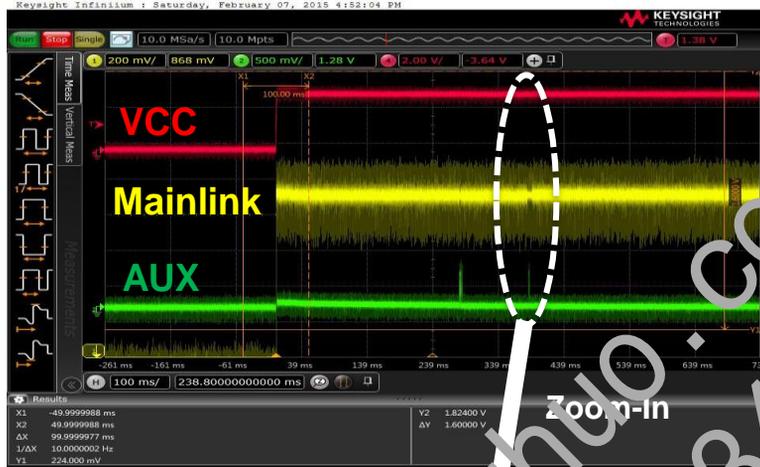


1. When issue is happened, system go to PSR mode for very short time.
2. If PSR active period is shorter than 1frame(16.67ms), T-Con can not go to the standby mode for PSR exit.

Define	When GPU go to the PSR mode, the source must hold the main link off over than 1frame.
--------	---

Product Specification


APPENDIX B. LGD Proposal for eDP Interface Design Guide

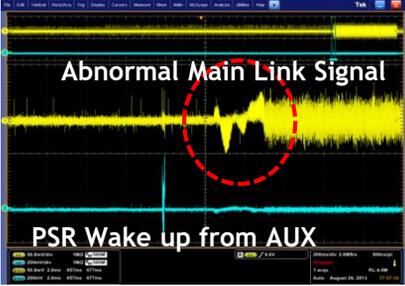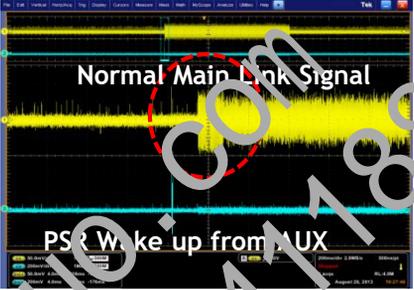10	Main Link Noise at PSR Exit
<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">  <p>[Abnormal Main Link Noise]</p> </div> <div style="text-align: center;">  <p>[Normal Main Link Signal]</p> </div> </div>	
Define	Main Link Noise at PSR Exit mode can be a cause abnormal display.

www.szguangzhuo.com
 Wechat: +86-13411884959

Product Specification

APPENDIX C. LGD Proposal for Measurement Method

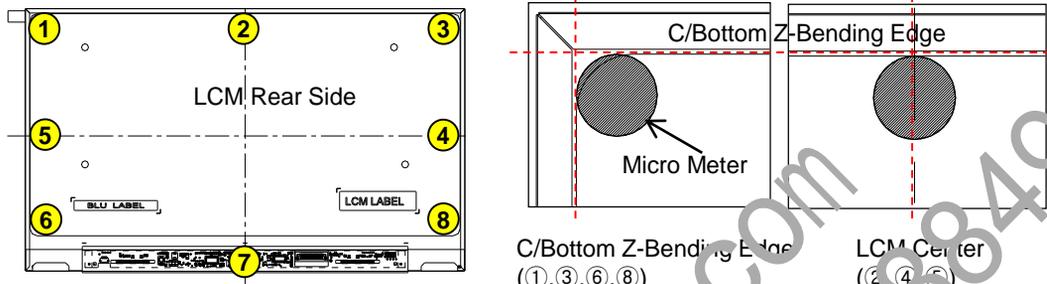1	LCM Thickness
Point	 <p>The diagram shows the rear side of the LCM with eight measurement points marked with yellow circles: 1 (top-left), 2 (top-center), 3 (top-right), 4 (right-center), 5 (left-center), 6 (bottom-left), 7 (bottom-center), and 8 (bottom-right). A dashed line indicates the center. Labels 'BLU LABEL' and 'LCM LABEL' are shown. Two detail views on the right show the 'C/Bottom Z-Bending Edge' and 'LCM Center' with a 'Micro Meter' being used for measurement.</p>
Measure Tool	<p>Micro Meter</p>  
Guide	<ul style="list-style-type: none"> ✓ Measure the thickness between Polarizer surface and M-Chassis on the rear of LCM ✓ Subtract Pol. protect film thickness from LCM thickness

Product Specification

APPENDIX D. Enhanced Extended Display Identification Data (EEDID™) 1/3

	Byte (Dec)	Byte (Hex)	Field Name and Comments	Value (Hex)	Value (Bin)
Header	0	00	Header	00	00000000
	1	01	Header	FF	11111111
	2	02	Header	FF	11111111
	3	03	Header	FF	11111111
	4	04	Header	FF	11111111
	5	05	Header	FF	11111111
	6	06	Header	FF	11111111
Vendor / Product EDID Version	7	07	Header	00	00000000
	8	08	ID Manufacture Name LGD	30	00110000
	9	09	ID Manufacture Name	11	00110000
	10	0A	ID Product Code 06D6h	D6	11010110
	11	0B	Feature Support [Display Power Management(DPM) : Standby Mode is not supported, Suspend Mode is not supported, Active Off = Very Low Power is not supported, Supported Color Encoding Formats : RGB 4:4:4, Other	06	00000110
	12	0C	ID Serial No. - Optional ("00h" If not used, Number Only and LSB First)	00	00000000
	13	0D	ID Serial No. - Optional ("00h" If not used, Number Only and LSB First)	00	00000000
	14	0E	ID Serial No. - Optional ("00h" If not used, Number Only and LSB First)	00	00000000
	15	0F	ID Serial No. - Optional ("00h" If not used, Number Only and LSB First)	00	00000000
	16	10	Week of Manufacture - Optinal 00 weeks	00	00000000
	17	11	Year of Manufacture 2021 years	1F	00011111
Display Parameters	18	12	EDID structure version # = 1	01	00000001
	19	13	EDID revision # = 4	04	00000100
	20	14	Video input Definition = Input is a Digital Video signal Interface, Color Bit Depth : 8 Bits per Primary Color, Digital Video Interface Standard Supported: DisplayPort is supported	A5	10100101
Panel Color Coordinates	21	15	Horizontal Screen Size (Rounded cm) = 31 cm	1F	00011111
	22	16	Vertical Screen Size (Rounded cm) = 17 cm	11	00010001
	23	17	Display Transfer Characteristic (Gamma) = (gamma_100, 2.2) = Example (2.2*100) / 100=120	78	01111000
	24	18	Feature Support [Display Power Management (DPM) : Standby Mode is not supported, Suspend Mode is not supported, Active Off = Very Low Power is not supported, Supported Color Encoding Formats : RGB 4:4:4, Other Feature Support Flags : sRGB, Preferred Timing Mode, Display in continuous frequency (Display Range Limits Descriptor is required).]	07	00000111
Established Timings	25	19	Red/Green Low Bits (Rx/Ry/Gx/Gy)	EE	11101110
	26	1A	Blue/White Low Bits (BxBy/Wx/Wy)	05	00000101
	27	1B	Red X Rx = 0.655	A7	10100111
	28	1C	Red Y Ry = 0.330	54	01010100
	29	1D	Green X Gx = 0.700	4C	01001100
	30	1E	Green Y Gy = 0.299	99	10011001
	31	1F	Blue X Bx = 0.145	25	00100101
	32	20	Blue Y By = 0.055	0E	00001110
Standard Timing ID	33	21	White X Wx = 0.313	50	01010000
	34	22	White Y Wy = 0.329	54	01010100
	35	23	Established timing 1 (Optional_00h if not used)	00	00000000
	36	24	Established timing 2 (Optional_00h if not used)	00	00000000
	37	25	Manufacturer's timings (Optional_00h if not used)	00	00000000
Standard Timing ID	38	26	Standard timing ID0 (Optional_01h if not used)	01	00000001
	39	27	Standard timing ID1 (Optional_01h if not used)	01	00000001
	40	28	Standard timing ID2 (Optional_01h if not used)	01	00000001
	41	29	Standard timing ID2 (Optional_01h if not used)	01	00000001
	42	2A	Standard timing ID3 (Optional_01h if not used)	01	00000001
	43	2B	Standard timing ID3 (Optional_01h if not used)	01	00000001
	44	2C	Standard timing ID4 (Optional_01h if not used)	01	00000001
	45	2D	Standard timing ID4 (Optional_01h if not used)	01	00000001
	46	2E	Standard timing ID5 (Optional_01h if not used)	01	00000001
	47	2F	Standard timing ID5 (Optional_01h if not used)	01	00000001
	48	30	Standard timing ID6 (Optional_01h if not used)	01	00000001
	49	31	Standard timing ID6 (Optional_01h if not used)	01	00000001
	50	32	Standard timing ID7 (Optional_01h if not used)	01	00000001
	51	33	Standard timing ID7 (Optional_01h if not used)	01	00000001
	52	34	Standard timing ID8 (Optional_01h if not used)	01	00000001
	53	35	Standard timing ID8 (Optional_01h if not used)	01	00000001

Product Specification

APPENDIX D. Enhanced Extended Display Identification Data (EEDID™) 2/3

	Byte (Dec)	Byte (Hex)	Field Name and Comments	Value (Hex)	Value (Bin)
Timing Descriptor #1	54	36	Pixel Clock/10,000 (LSB) 138.7 MHz @ 60 Hz	2E	00101110
	55	37	Pixel Clock/10,000 (MSB)	36	00110110
	56	38	Horizontal Active (HA) (lower 8 bits) 1920 pixels	80	10000000
	57	39	Horizontal Blanking (HB) (lower 8 bits) 160 pixels	A0	10100000
	58	3A	Horizontal Active (HA) / Horizontal Blanking (HB) (upper 4:4bits)	70	01110000
	59	3B	Vertical Active (VA) 1080 lines	38	01110000
	60	3C	Vertical Blanking (VB) (DE Blanking typ.for DE only panels) 31 line	1F	00011111
	61	3D	Vertical Active (VA) / Vertical Blanking (VB) (upper 4:4bits)	40	01000000
	62	3E	Horizontal Front Porch in pixels (HF) (lower 8 bits) 48 pixels	30	01100000
	63	3F	Horizontal Sync Pulse Width in pixels (HS) (lower 8 bits) 32 pixels	20	00100000
	64	40	Vertical Front Porch in lines (VF) : Vertical Sync Pulse Width in lines (VS) (lower 4 bits) : 3 lines : 5 lines	35	00110101
	65	41	Horizontal Front Porch/ Sync Pulse Width/ Vertical Front Porch/ Sync Pulse Width (upper 2bits)	00	00000000
	66	42	Horizontal Video Image Size (mm) (lower 8 bits) 309 mm	35	00110101
	67	43	Vertical Video Image Size (mm) (lower 8 bits) 174 mm	AE	10101110
	68	44	Horizontal Image Size / Vertical Image Size (upper 4 bits)	10	00010000
	69	45	Horizontal Border = 0 (Zero for Notebook LCD)	00	00000000
	70	46	Vertical Border = 0 (Zero for Notebook LCD)	00	00000000
71	47	Non-Interface, Normal display, no stereo, Digital Separate [Vsync_NEG, Hsync_POS (outside of V-sync)]	1A	00011010	
Timing Descriptor #2	72	48	Pixel Clock/10,000 (LSB) 111 MHz @ 48 Hz	58	01011000
	73	49	Pixel Clock/10,000 (MSB)	2B	00101011
	74	4A	Horizontal Active (HA) (lower 8 bits) 1920 pixels	80	10000000
	75	4B	Horizontal Blanking (HB) (lower 8 bits) 160 pixels	A0	10100000
	76	4C	Horizontal Active (HA) / Horizontal Blanking (HB) (upper 4:4bits)	70	01110000
	77	4D	Vertical Active (VA) 1080 lines	38	00111000
	78	4E	Vertical Blanking (VB) (DE Blanking typ.for DE only panels) 31 lines	1F	00011111
	79	4F	Vertical Active (VA) / Vertical Blanking (VB) (upper 4:4bits)	40	01000000
	80	50	Horizontal Front Porch in pixels (HF) (lower 8 bits) 48 pixels	30	00110000
	81	51	Horizontal Sync Pulse Width in pixels (HS) (lower 8 bits) 32 pixels	20	00100000
	82	52	Vertical Front Porch in lines (VF) : Vertical Sync Pulse Width in lines (VS) (lower 4 bits) : 3 lines : 5 lines	35	00110101
	83	53	Horizontal Front Porch/ Sync Pulse Width/ Vertical Front Porch/ Sync Pulse Width (upper 2bits)	00	00000000
	84	54	Horizontal Video Image Size (mm) (lower 8 bits) 309 mm	35	00110101
	85	55	Vertical Video Image Size (mm) (lower 8 bits) 174 mm	AE	10101110
	86	56	Horizontal Image Size / Vertical Image Size (upper 4 bits)	10	00010000
	87	57	Horizontal Border = 0 (Zero for Notebook LCD)	00	00000000
	88	58	Vertical Border = 0 (Zero for Notebook LCD)	00	00000000
89	59	Non-Interface, Normal display, no stereo, Digital Separate [Vsync_NEG, Hsync_POS (outside of V-sync)]	1A	00011010	
Timing Descriptor #3	90	5A	Flag	00	00000000
	91	5B	Flag	00	00000000
	92	5C	Flag	00	00000000
	93	5D	Data Type 1: Alphnumeric Data String (ASCII String)	FE	11111110
	94	5E	Flag	00	00000000
	95	5F	Dell P/N 1st Character = H	48	01001000
	96	60	Dell P/N 2nd Character = J	4A	01001010
	97	61	Dell P/N 3rd Character = J	4A	01001010
	98	62	Dell P/N 4th Character = H	48	01001000
	99	63	Dell P/N 5th Character = T	54	01010100
	100	64	EDID Revision Build Name = MP(X-Build) , Revision # = A01	81	10000001
	101	65	Manufacturer P/N = 1	31	00110001
	102	66	Manufacturer P/N = 4	34	00110100
	103	67	Manufacturer P/N = 0	30	00110000
104	68	Manufacturer P/N = W	57	01010111	
105	69	Manufacturer P/N = F	46	01000110	
106	6A	Manufacturer P/N = 9	39	00111001	
107	6B	Manufacturer P/N (If < 13 char, then terminate with ASC II code 0Ah,set remaining char = 20h)	0A	00001010	

Product Specification

APPENDIX D. Enhanced Extended Display Identification Data (EEDID™) 3/3

	Byte (Dec)	Byte (Hex)	Field Name and Comments	Value (Hex)	Value (Bin)
Timing Descriptor #4	108	6C	Flag	00	00000000
	109	6D	Flag	00	00000000
	110	6E	Flag	00	00000000
	111	6F	Data Type Tag : Descriptor Defined by manufacturer	00	00000000
	112	70	Flag	00	00000000
	113	71	Color Management [No +2 FRC Support, True Color Depth : 8 bit]	02	00000000
	114	72	Panel Type [WLED], Configuration [Single light bar], Number Lamp or LED Light Bar [one]	41	01000001
	115	73	Frame Rate Details [Minimum Frame Rate : 40Hz, Maximum Frame Rate : 65Hz , Tcon provides active Intel DRRS / sDRRS support]	30	00110001
	116	74	Controller Interface and Maximum Luminance [PWM type, 400 nit]	78	10101000
	117	75	Front Surface / Polarizer [Anti-Glare, No Transflective], Pixel Structure [RGB v-stripe]	00	00000000
	118	76	Multi-Media Features [Color Management : NTSC, Dynamic Backlight Control : Type 1]	00	00010000
	119	77	Multi-Media Features [Motion Blur : No support , Active Gamma Control : No support]	00	00000000
	120	78	Special Features [Wireless Enhancement Hardware : No support , In-Cell Scanner : No support]	00	00000000
	121	79	Special Features [Number of LVDS channels or eDP lanes : two , Overdrive : No , Interface : eDP , In-Cell Touch Support : No]	0A	00001010
	122	7A	Special Features [BIST Support : yes , Electronic Privacy : No , Electronic privacy hardware support : 3-2 , Support : No]	01	00000001
123	7B	(If<13 char-> 0Ah, then terminate with ASC II code 0Ah, set remaining char = 20h)	0A	00001010	
124	7C	(If<13 char-> 0Ah, then terminate with ASC II code 0Ah, set remaining char = 20h)	20	00100000	
125	7D	(If<13 char-> 0Ah, then terminate with ASC II code 0Ah, set remaining char = 20h)	20	00100000	
Checksum	126	7E	Extension flag (# of optional 128 panel ID extension block to follow, Type = 0)	00	00000000
	127	7F	Check Sum (The 1-byte sum of all 128 bytes in this panel ID block shall =)	9E	10011110