

Product Specification

SPECIFICATION FOR APPROVAL

() Preliminary Specification

(◆) Final Specification

Title	14.0" WUXGA TFT LCD
-------	---------------------

BUYER		SUPPLIER	LG Display Co., Ltd.
MODEL		*MODEL	LP140WU1
		Suffix	SPF1

*When you obtain standard approval,
please use the above model name without suffix

APPROVED BY	SIGNATURE
_____	_____
_____	_____
_____	_____

Please return 1 copy for your confirmation with your signature and comments.

APPROVED BY	SIGNATURE
P. A. Choi / G. Manager	_____
REVIEWED BY	
Y. S. Ha / Manager [C]	_____
S. W. KIM / Manager [M]	_____
K. T. Park / Manager [P]	_____
PREPARED BY	
H. S. Suh/ Engineer	_____

Products Engineering Dept.
LG Display Co., Ltd

Product Specification

Contents

No	ITEM	Page
	COVER	1
	CONTENTS	2
	RECORD OF REVISIONS	3
1	GENERAL DESCRIPTION	4
2	ABSOLUTE MAXIMUM RATINGS	5
3	ELECTRICAL SPECIFICATIONS	6
3-1	LCD ELECTRICAL CHARACTERISTICS	7
3-2	LED BACKLIGHT ELECTRICAL CHARACTERISTICS	8
3-3	INTERFACE CONNECTIONS	9
3-4	eDP SIGNAL TIMING SPECIFICATIONS	11
3-5	SIGNAL TIMING SPECIFICATIONS	15
3-6	SIGNAL TIMING WAVEFORMS	15
3-7	COLOR INPUT DATA REFERENCE	16
3-8	POWER SEQUENCE	17
4	OPTICAL SPECIFICATIONS	18
5	MECHANICAL CHARACTERISTICS	21
6	RELIABILITY	24
7	INTERNATIONAL STANDARDS	25
7-1	SAFETY	25
7-2	ENVIRONMENT	25
8	PACKING	26
8-1	DESIGNATION OF LOT MARK	26
8-2	PACKING FORM	27
8-3	PACKING ASSEMBLY	28
8-4	PRECAUTIONS FOR UNPACKING THE BOX	29
8-5	PRECAUTIONS FOR HANDLING TRAY	30
9	PRECAUTIONS	31
	APPENDIX A. LGD PROPOSAL FOR SYSTEM COVER DESIGN	33
	APPENDIX B. LGD PROPOSAL FOR eDP INTERFACE DESIGN GUIDE	46
	APPENDIX C. LGD Proposal for Measurement Method (Thickness/Bracket Height/etc.)	54
	APPENDIX D. ENHANCED EXTENDED DISPLAY IDENTIFICATION DATA	55

Product Specification

Record of Revisions

Revision No	Revision Date	Page	Before	After	EDID version
0.0	Jun. 24, 2021	All	First Draft (Preliminary Specification)	-	-
0.1	Aug. 26, 2021	21	-	Mechanical Characteristics update	-
		23		Rear view drawing update	
0.2	Sep. 10, 2021	5, 21	Surface treatment : Glare	Surface treatment : Anti-Glare	
		17	-	Add power sequence "F19"	
		18	Color tolerance : 0.25	Color tolerance : 0.25	
0.3	Nov. 18, 2021	21	Outline Dimension: 198.15 Max Weight:178g (Max.)	Outline Dimension: 197.55 ±0.3mm Weight:170g (Typ.)/178g (Max.)	
1.0	Mar. 7, 2022	-	Final specifications		
		55~60	-	Update EDID	




Product Specification

1. General Description

1-1. Introduction

The LP140WU1 is a Color Active Matrix Liquid Crystal Display with an integral LED backlight system. The matrix employs oxide Thin Film Transistor as the active element. It is a transmissive type display operating in the normally black mode. This TFT-LCD has 14.0 inches diagonally measured active display area with WUXGA resolution (1920 horizontal by 1200 vertical pixel array). Each pixel is divided into Red, Green and Blue sub-pixels or dots which are arranged in vertical stripes. Gray scale or the brightness of the sub-pixel color is determined with a 8-bit gray scale signal for each dot, thus, presenting a palette of more than 16,777,216 colors. The LP140WU1 has been designed to apply the interface method that enables low power, high speed, low EMI. The LP140WU1 is intended to support applications where thin thickness, low power are critical factors and graphic displays are important. In combination with the vertical arrangement of the sub-pixels, the LP140WU1 characteristics provide an excellent flat display for office automation products such as Notebook PC.

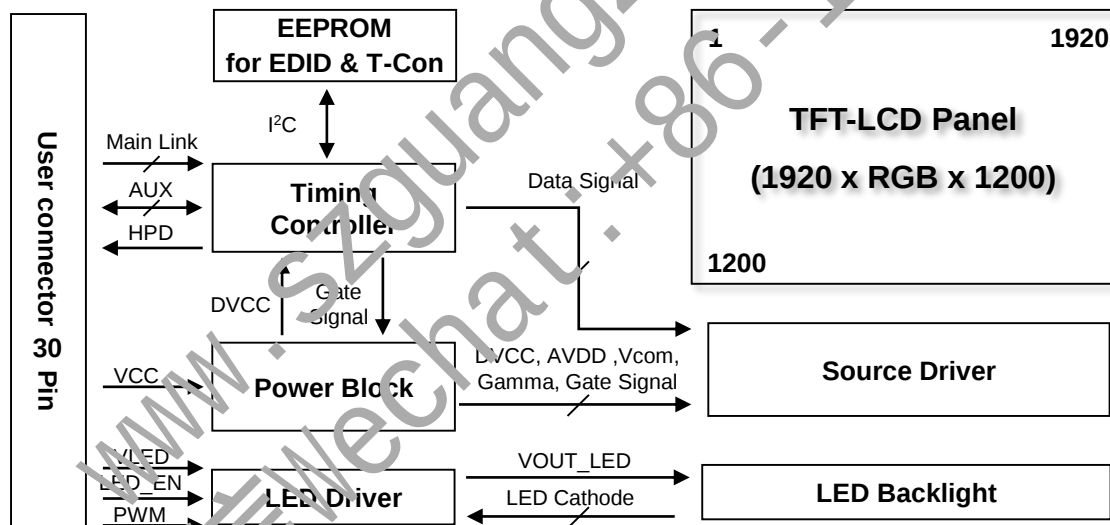



Product Specification

1-2. General Feature

Active Screen Size	14.0 inches diagonal	
Outline Dimension	306.59 (H, Typ.) × 197.85 (V, Typ.) X 2.10 (D, Max.) [mm] (w/o PCB) X 3.80 (D, Max.) [mm] (W/ PCB)	
Pixel Pitch	0.15708mm x 0.15708mm	
Pixel Format	1920 horiz. by 1200 vert. Pixels RGB strip arrangement	
Color Depth	8 bit, 16,777,216 colors	
Luminance, White	350cd/m ² (Typ.)	
Power Consumption	Total 2.78W (Typ.) Logic : 0.32W (Typ. @ Mosaic), B/L : 2.46W (Typ.) 2.90W (Max.) Logic : 0.35W (Max. @ Mosaic) B/L : 2.55W (Max.)	
Weight	170g (Typ.) / 178g (Max.)	
Display Operating Mode	Normally black	
Surface Treatment	Anti-Glare treatment (3H) of the front Polarizer	
Color Gamut(Based on CE 1931)	Supporting DCI Typ. 99%, Min. 95% (Cover Ratio)	
LED Dimming Control mode	DC Dimming (Mixed Dimming)	
RoHS Compliance	Yes	
BFR / PVC / As Free	Yes for all	
eDP version(Tcon)	eDP1.4	
DPCD version	Ver1.4	
Function	PSR	PSR2
	sDRRS	Not support
	DMRRS	Not support
	Adaptive sync	Not support
	NVCR	Not support
	SSC	Down spread 0.5%

2. Absolute Maximum Ratings

The following are maximum values which, if exceeded, may cause faulty operation or damage to the unit.


Table 1. ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Values		Units	Notes
		Min	Max		
Power Input Voltage	VCC	-0.3	4.0	V _{CC}	at 25 °C, 2°C
Operating Temperature	TOP	0	50	°C	1
Storage Temperature	TST	-20	60	°C	1,2
Operating Ambient Humidity	HOP	10	90	%RH	1
Storage Humidity	HST	10	90	%RH	1,2

Note : 1. Temperature and relative humidity range are shown in the figure below.

Wet bulb temperature should be 39°C Max. and no condensation of water.

Note : 2. Storage Condition is guaranteed under packing condition.

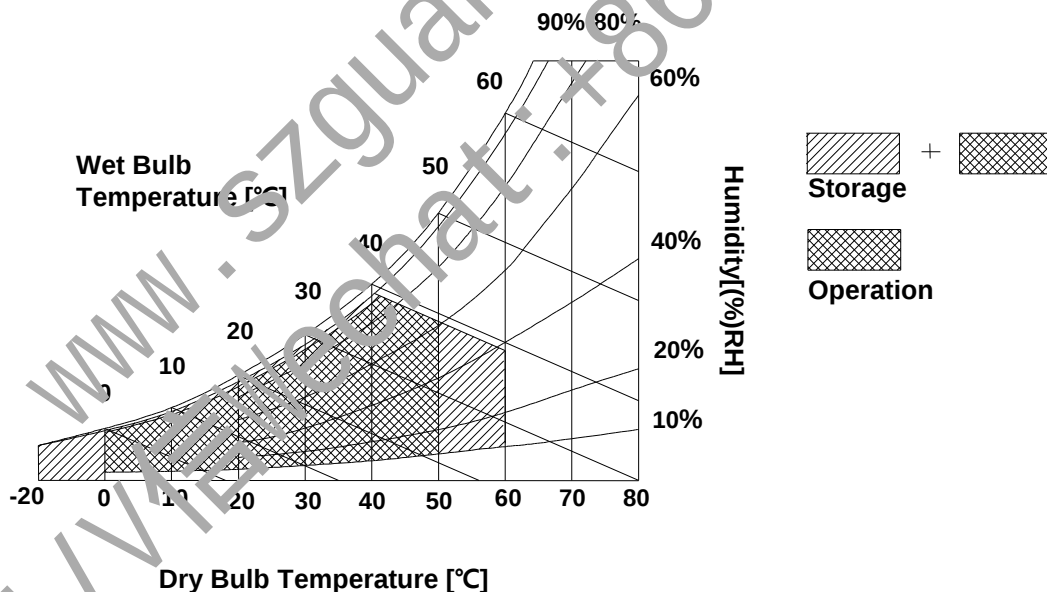



Product Specification

3. Electrical Specifications


3-1. LCD Electrical Characteristics

Table 2. LCD ELECTRICAL CHARACTERISTICS


Parameter		Symbol	Values			Unit	Notes
			Min	Typ	Max		
Power Supply Input Voltage		V _{CC}	3.0	3.3	3.6	V	1
Permissive Power Supply Input Ripple		V _{CCrp}	-	-	100	mV _{p-p}	
Power Supply Input Current	Mosaic	I _{CC}	-	97	107	nA	2
Power Consumption	Mosaic	P _{CC}	-	0.32	0.35	W	
Power Supply Inrush Current		I _{CC_P}	-	-	1.5	A	3
Differential Impedance		Z _{eDP}	72.5	85	97.8	Ω	

Note)

1. The measuring position is the connector of LCM and the test conditions are under 25°C, f_v = 60Hz
2. The specified I_{CC} current and power consumption are under the V_{CC} = 3.3V , 25°C, f_v = 60Hz condition and Mosaic & Red pattern.

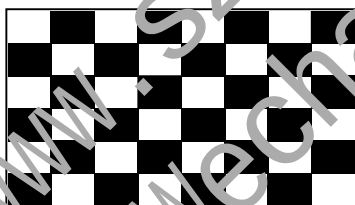

3. The V_{CC} rising time is same as the minimum of T1 at Power on sequence.

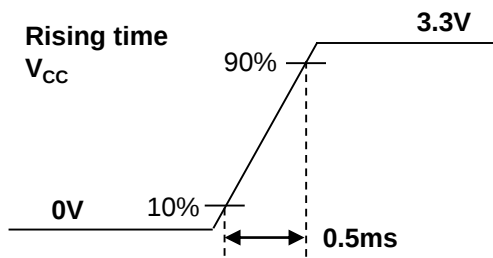

Product Specification


3-2. LED Backlight Electrical Characteristics

Table 3. LED B/L ELECTRICAL CHARACTERISTICS

Parameter		Symbol	Values			Unit	Notes
			Min	Typ	Max		
LED Power Input Voltage		V _{LED}	5.0	12.0	20.0	V	1
LED Power Input Current		I _{LED}	-	205	212.5	mA	2
LED Power Consumption		P _{LED}	-	2.46	2.55	W	3
LED Power Inrush Current		I _{LED_P}	-	-	1.5	A	3
PWM Duty Ratio			5	-	100	%	4
PWM Resolution			10			Bit	5
PWM Jitter			0	-	0.05	%	6
PWM Frequency		F _{PWM}	200	-	2000	Hz	7
PWM	High Level Voltage	V _{PWM_H}	2.5	-	3.6	V	
	Low Level Voltage	V _{PWM_L}	0	-	0.3	V	
	Rising Time	T _{r_PWM}	-	-	500	ns	
	Falling Time	T _{f_PWM}	-	-	500	ns	
LED_EN	High Voltage	V _{LED_EN_H}	2.5	-	3.6	V	
	Low Voltage	V _{LED_EN_L}	0	-	0.3	V	
Life Time			15,000	-	-	Hrs	8

Note)

1. The measuring position is the connector of LCM and the test conditions are under 25°C.
2. The current and power consumption with LED Driver are under the V_{LED} = 12.0V , 25°C, PWM Duty 100% and White pattern with the normal frame frequency operated(60Hz).
3. The V_{LED} rising time is same as the minimum of T13 at Power on sequence.

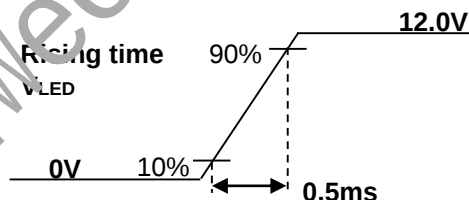


4. The operation of LED Driver below minimum dimming ratio may cause flickering or reliability issue.
5. 10bit resolution means it's possible to change PWM duty by 0.1% step. (8bit operated by 0.4% step)
6. If Jitter of PWM is bigger than maximum, it may induce flickering.
7. This Spec is not effective at 100% dimming ratio as an exception because it has DC level equivalent to 0Hz. In spite of acceptable range as defined, the PWM Frequency should be fixed and stable for more consistent brightness control at any specific level desired.
8. The life time is determined as the time at which brightness of LCD is 50% compare to that of minimum value specified in table 7. under general user condition.



Product Specification

3-3. Interface Connections

Table 4. MODULE CONNECTOR PIN CONFIGURATION (CN1)

Pin	Symbol	Description	Notes
1	NC Reserved	Reserved for LCD manufacturer's use	[Connector] I-PEX, 20729-030E (30pin, 0.4pitch) [Connector pin arrangement]  [LGD P-Vcom using information] 1. Pin for P-Vcom : #24, #25 2. P-Vcom Address : 0101000x
2	GND	High Speed Ground	
3	Lane1_N	Complement Signal Link Lane 1	
4	Lane1_P	True Signal Link Lane 1	
5	GND	High Speed Ground	
6	Lane0_N	Complement Signal Link Lane 0	
7	Lane0_P	True Signal Link Lane 0	
8	GND	High Speed Ground	
9	AUX_CH_P	True Signal Auxiliary Channel	
10	AUX_CH_N	Complement Signal Auxiliary Channel	
11	GND	High Speed Ground	
12	VCC	LCD logic and driver power	
13	VCC	LCD logic and driver power	
14	LCD Self Test or NC	LCD Panel Self Test Enable (Optional)	
15	GND	LCD logic and driver ground	
16	GND	LCD logic and driver ground	
17	HPD	HPD signal pin	
18	BL_GND	LED Backlight ground	
19	BL_GND	LED Backlight ground	
20	BL_GND	LED Backlight ground	
21	BL_GND	LED Backlight ground	
22	BL ENABLE	LED Backlight control on/off control	
23	BL PWM	System PWM signal input for dimming	
24	NC Reserved	Reserved for LCD manufacture's use	
25	NC Reserved	Reserved for LCD manufacture's use	
26	VLED	LED Backlight power (12V Typical)	
27	VLED	LED Backlight power (12V Typical)	
28	VLED	LED Backlight power (12V Typical)	
29	VLED	LED Backlight power (12V Typical)	
30	NC Reserved	Reserved for LCD manufacture's use	

3-3-1. Input/output signal circuit

Figure1.HPD Output circuit is as below

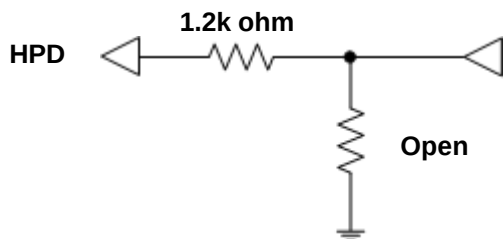


Figure2.BL PWM input circuit is as below

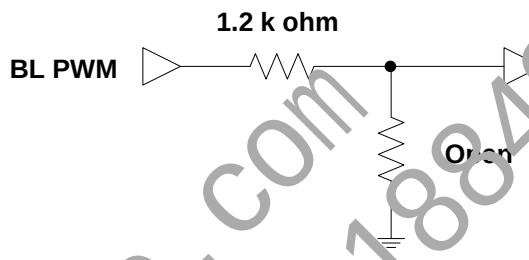


Figure3.BL Enable input circuit is as below

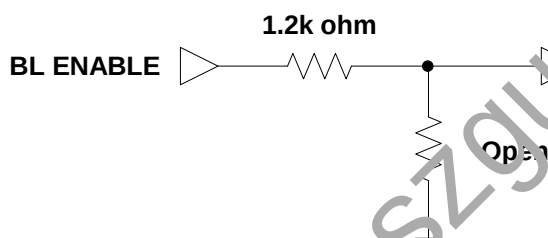


Figure4.BIST input circuit is as below


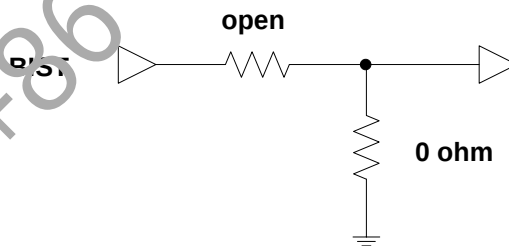


Figure5.DBC input circuit is as below




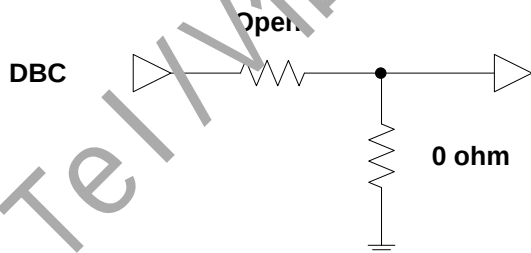


Product Specification

3-4. eDP Signal Timing Specifications

3-4-1. Definition of Differential Voltage

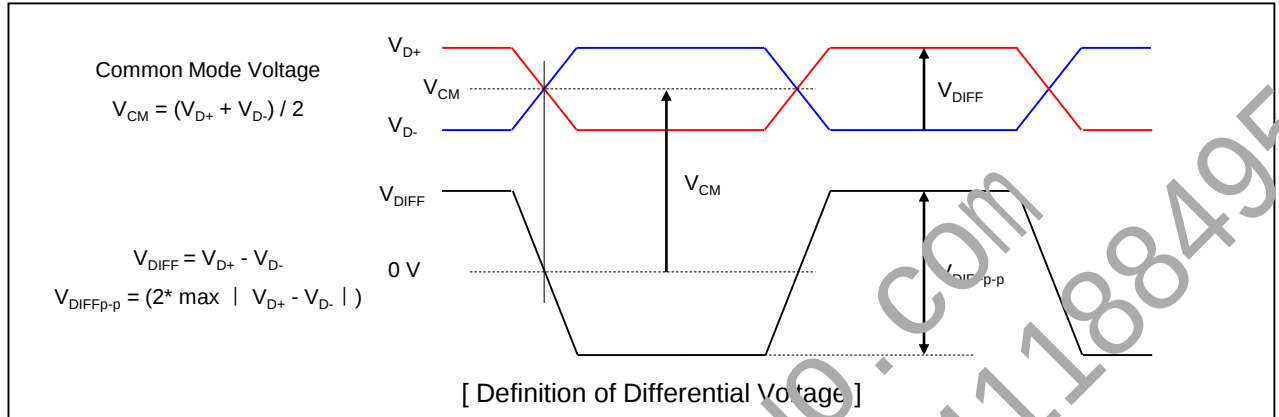


3-4-2. Main Link EYE Diagram

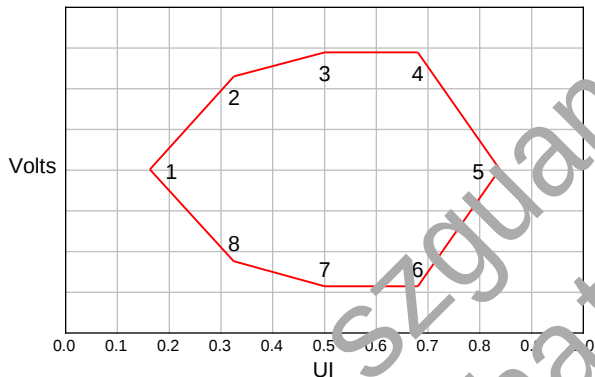

Point	Reduced Bit Rate		High Bit Rate	
	Time(UI)	Voltage(V)	Time(UI)	Voltage(V)
1	0.127	0.000	0.210	0.000
2	0.291	0.160	0.355	0.140
3	0.500	0.200	0.500	0.175
4	0.709	0.200	0.645	0.175
5	0.873	0.000	0.790	0.000
6	0.709	-0.200	0.645	-0.175
7	0.500	-0.200	0.500	-0.175
8	0.291	-0.160	0.355	-0.140

[EYE Mask Vertices at Source Connector Pins]

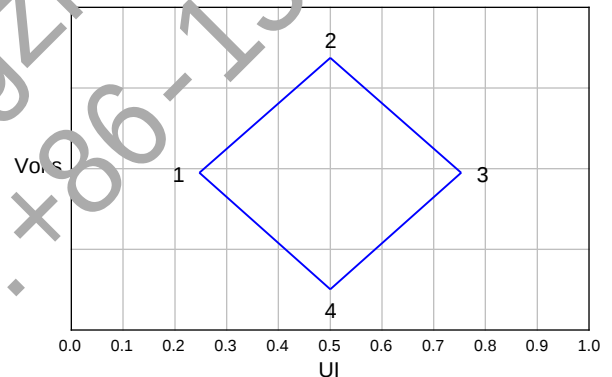

Point	Reduced Bit Rate		High Bit Rate	
	Time(UI)	Voltage(V)	Time(UI)	Voltage(V)
1	0.375	0.000	0.246	0.000
2	0.500	0.023	0.500	0.075
3	0.625	0.000	0.755	0.000
4	0.500	-0.023	0.500	-0.075


[EYE Mask Vertices at Sink Connector Pins]

Point	Reduced Bit Rate		High Bit Rate	
	Time(UI)	Voltage(V)	Time(UI)	Voltage(V)
1	0.270	0.000	0.246	0.000
2	0.500	0.068	0.500	0.075
3	0.731	0.000	0.755	0.000
4	0.500	-0.068	0.500	-0.075

[EYE Mask Vertices at embedded DP Sink Connector Pins]

Product Specification

3-4-3. eDP Main Link Signal

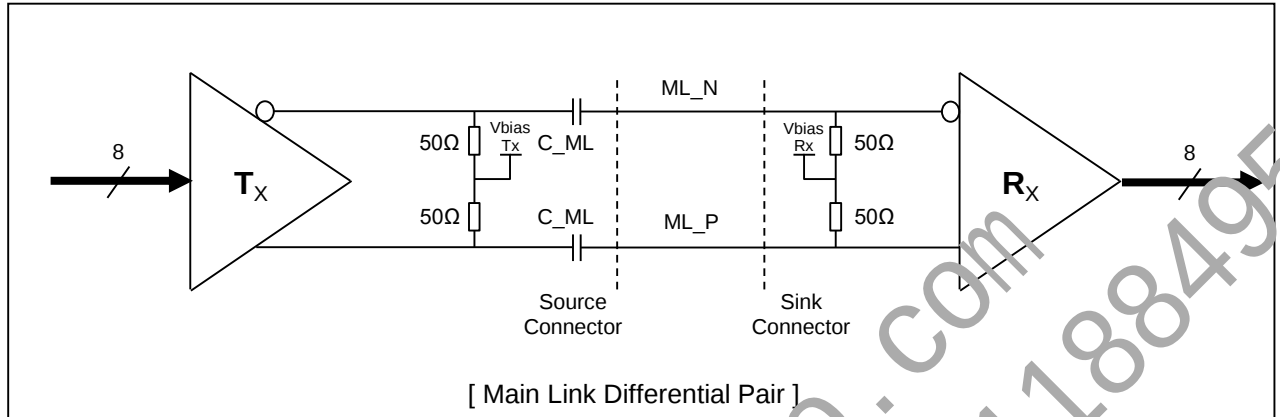


Parameter	Symbol	Min	Typ	Max	Unit	Notes
Unit Interval for high bit rate (2.7Gbps / lane)	UI_HBR	-	370	-	ps	
Unit Interval for reduced bit rate (1.62Gbps / lane)	UI_RBR	-	617	-	ps	
Link Clock Down Spreading	Amplitude	0	-	0.5	%	
	Frequency	30	-	33	kHz	
Differential peak-to-peak voltage at Source side connector	$V_{TX-DIFFp-p}$	350	-	-	mV	For HBR(2.7Gbps)
		400	-	-		For RBR(1.62Gbps)
EYE width at Source side connector	$T_{TX-EYE-CONN}$	0.58	-	-	UI	For HBR(2.7Gbps)
		0.75	-	-	UI	For RBR(1.62Gbps)
Differential peak-to-peak voltage at Sink side connector	$V_{RX-DIFFp-p}$	150	-	-	mV	For HBR(2.7Gbps)
		136	-	-		For RBR(1.62Gbps)
EYE width at Sink side connector	$T_{RX-EYE-CONN}$	0.51	-	-	UI	For HBR(2.7Gbps)
		0.46	-	-	UI	For RBR(1.62Gbps)
Rx DC common mode voltage	$V_{RX CM}$	0	-	1.0	V	
AC Coupling Capacitor	$C_{SOURCE-ML}$	75		200	nF	Source side

Note:

1. Termination resistor is typically integrated into the transmitter and receiver implementations.
2. AC Coupling Capacitor is not placed at the sink side.
3. In cabled embedded system, it is recommended the system designer ensure that EYE width and voltage are met at the sink side connector pins.

Product Specification

3-4-4. eDP AUX Channel Signal

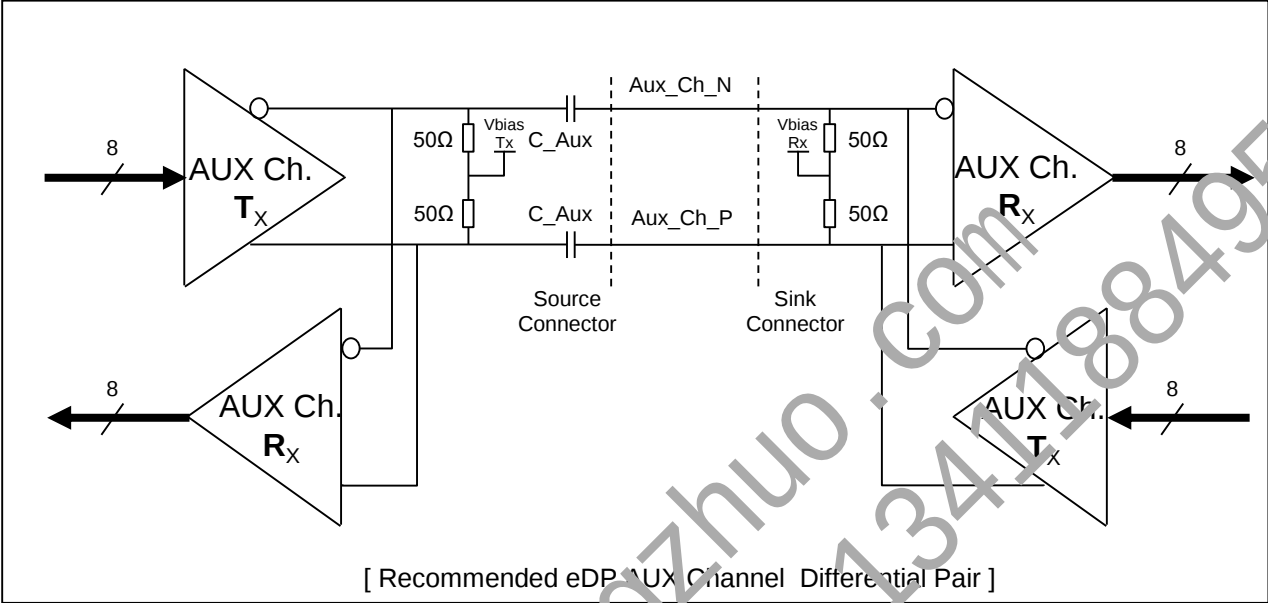

Parameter	Symbol	Min	Typ	Max	Unit	Notes
AUX Unit Interval	UI	0.4	-	0.6	us	
AUX Jitter at Tx IC Package Pins	T _{jitter}	-	-	0.04	UI	Equal to 24ns
AUX Jitter at Rx IC Package Pins		-	-	0.05	UI	Equal to 30ns
AUX Peak-to-peak voltage at Connector Pins of Receiving	V _{AUX-DIFFp-p}	0.39	-	1.38	V	
AUX Peak-to-peak voltage at Connector Pins of Transmitting		0.36	-	1.36	V	
AUX Eye width at Connector Pins of Tx and Rx		0.98	-	-	UI	
AUX DC common mode voltage	V _{AUX-CM}	0	-	1.0	V	
AUX AC Coupling Capacitor	C _{SOURCE-AUX}	75		200	nF	Source side

- Note)
1. Termination resistor is typically integrated into the transmitter and receiver implementations.


2. AC Coupling Capacitor is not placed at the sink side.

3. $V_{AUX-DIFFp-p} = 2 * |V_{AUXP} - V_{AUXN}|$



Product Specification

3-4-5. eDP HPD Signal

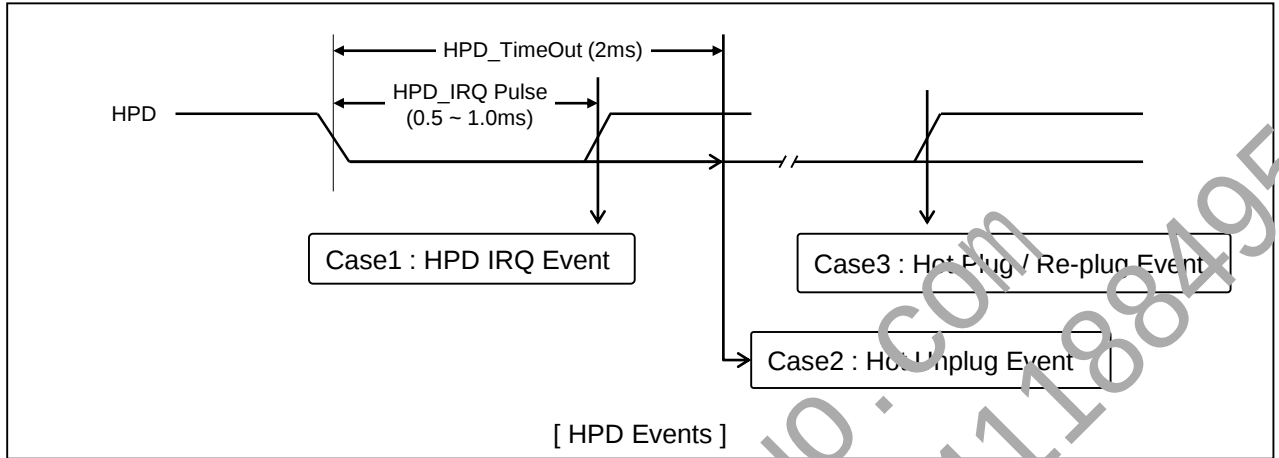

Parameter	Symbol	Min	Typ	Max	Unit	Notes
HPD Voltage	HPD	2.25	-	3.6	V	Sink side Driving
Hot Plug Detection Threshold		2.0	-	-	V	Source side Detecting
Hot Unplug Detection Threshold		-	-	0.8	V	
HPD_IRQ Pulse Width	HPD_IRQ	0.5	-	1.0	ms	
HPD_TimeOut		2.0	-	-	ms	HPD Unplug Event

Note)

1. HPD IRQ : Sink device wants to notify the Source device that Sink's status has changed so it toggles HPD line, forcing the Source device to read its Link / Sink Receiver DPCD field via the AUX-CH
2. HPD Unplug : The Sink device is no longer attached to the Source device and the Source device may then disable its Main Link as a power saving mode
3. Plug / Re-plug : The Sink device is now attached to the Source device, forcing the Source device to read its Receiver capabilities and Link / Sink status Receiver DPCD fields via the AUX-CH



Product Specification

3-5. Signal Timing Specifications


This is the signal timing required at the input of the User connector. All of the interface signal timing should be satisfied with the following specifications and specifications of eDP Tx/Rx for its proper operation.

Table 4. TIMING TABLE

ITEM	Symbol		Min	Typ	Max	Unit	Note
DCLK	Frequency	f _{CLK}	-	154.13	-	MHz	
Hsync	Period	t _{HP}	2076	2080	2084	t _{CLK}	
	Width	t _{WH}	32	32	32		
	Width-Active	t _{WHA}	1920				
Vsync	Period	t _{VP}	1233	1235	1237	t _{HP}	
	Width	t _{WV}	6	6	6		
	Width-Active	t _{WVA}	1200				
Data Enable	Horizontal back porch	t _{HBP}	76	80	84	t _{CLK}	
	Horizontal front porch	t _{HFP}	48	48	48		
	Vertical back porch	t _{VBP}	24	26	28	t _{HP}	
	Vertical front porch	t _{VFP}	3	3	3		

Notice. all reliabilities are specified for timing specification based on refresh rate of 60Hz. However, LP140WU1 has a good actual performance even at lower refresh rate (e.g. 40Hz or 50Hz) for power saving Mode, whereas LP140WU1 is secured only for function under lower refresh rate. 60Hz at Normal mode, 50Hz, 40Hz at Power save mode. Don't care Flicker level, Touch Report Rate (Power save mode).

3-6. Signal Timing Waveforms

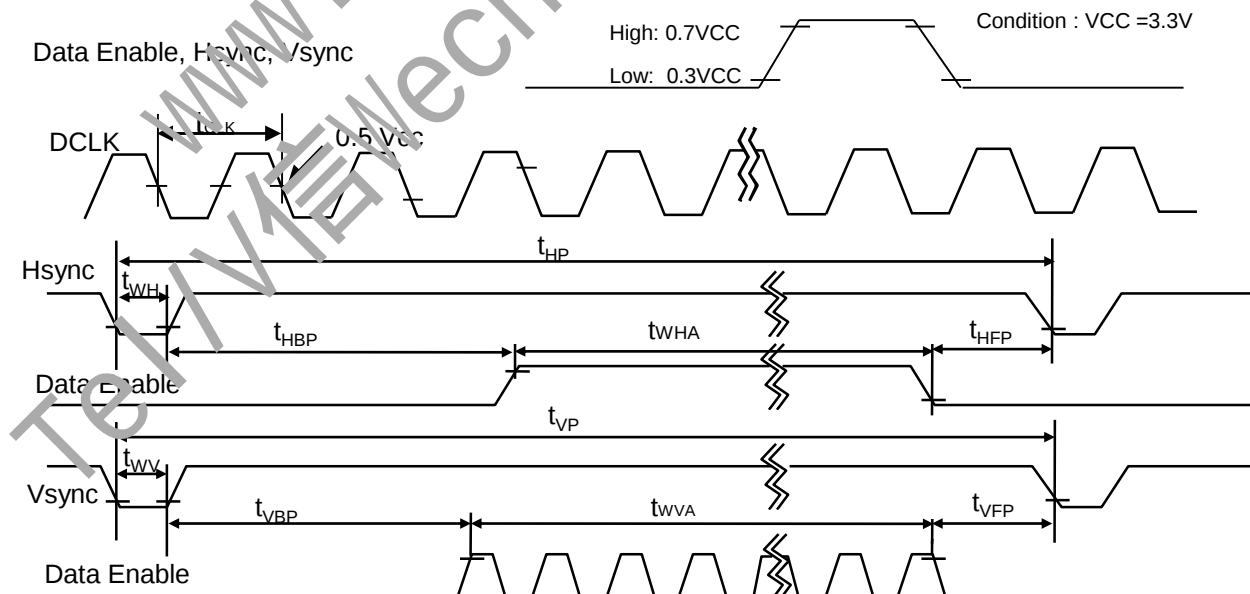



Product Specification

3-7. Color Input Data Reference

The brightness of each primary color (red, green and blue) is based on the 8-bit gray scale data input for the color ; the higher the binary input, the brighter the color. The table below provides a reference for color versus data input.

Table 6. COLOR DATA REFERENCE

Color		Input Color Data																							
		RED								GREEN								BLUE							
		MSB				LSB				MSB				LSB				MSB				LSB			
		R7	R6	R5	R4	R3	R2	R1	R0	G7	G6	G5	G4	G3	G2	G1	G0	B7	B6	B5	B4	B3	B2	B1	B0
Basic Color	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Green	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Cyan	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	Magenta	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
RED	RED (0)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	RED (1)	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	...	...								...								...							
	RED (254)	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	RED (255)	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
GREEN	GREEN (0)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	GREEN (1)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0
	...	...								...								...							
	GREEN (254)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0
	GREEN (255)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
BLUE	BLUE (0)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	BLUE (1)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
	...	...								...								...							
	BLUE (254)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0
	BLUE (255)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1

Product Specification

3-8. Power Sequence

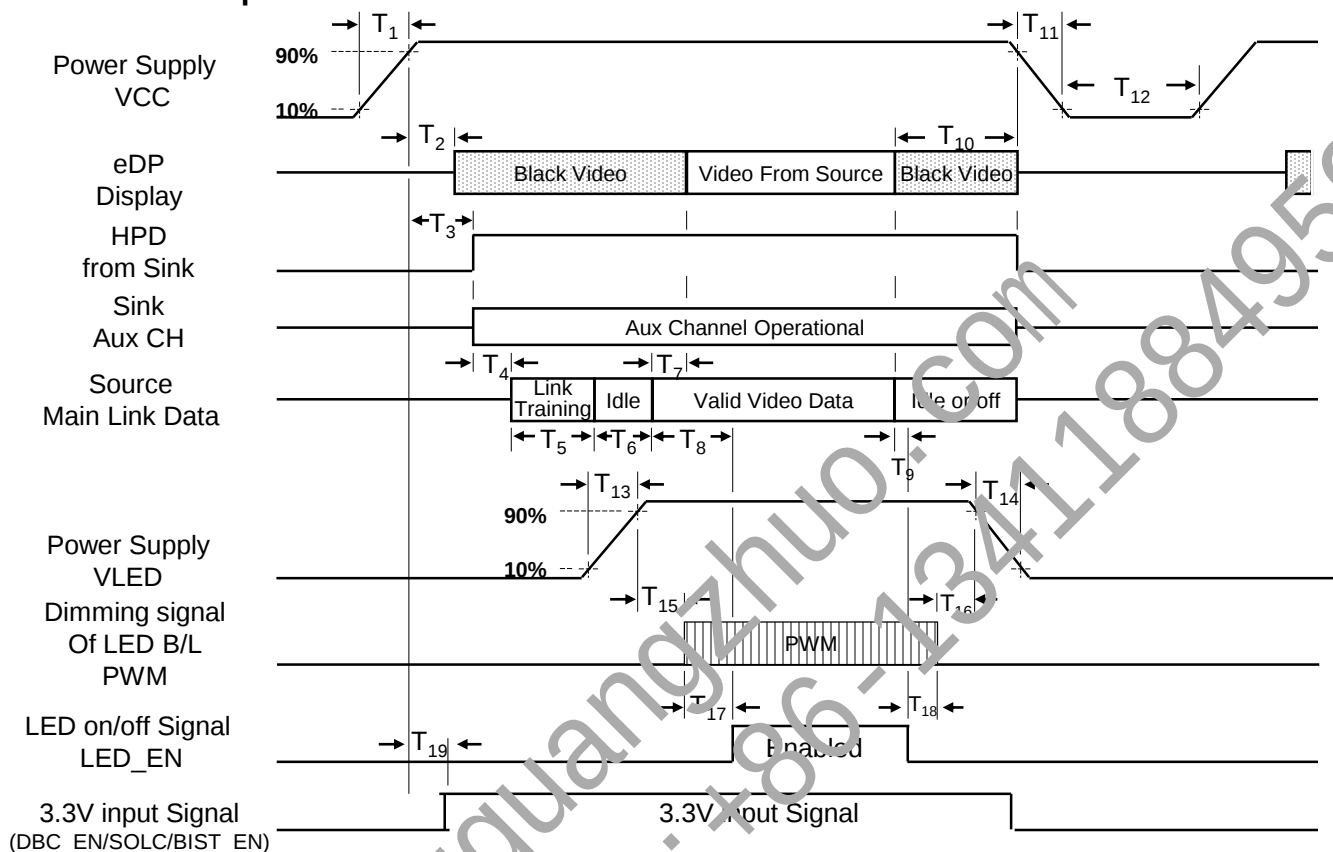


Table 3. POWER SEQUENCE TABLE

Symbol	Required By	Limits		Units	Notes
		Min	Max		
T ₁	Source	0.5	10	ms	-
T ₂	Sink	0	200	ms	-
T ₃	Sink	0	200	ms	-
T ₄	Source	-	-	ms	-
T ₅	Source	-	-	ms	-
T ₆	Source	-	-	ms	-
T ₇	Sink	0	50	ms	-
T ₈	Source	-	-	ms	5
T ₉	Source	50	100	ms	6
T ₁₀	Source	100	500	ms	7
T ₁₁	Source	-	10	ms	-
T ₁₂	Source	500	-	ms	-
T ₁₃	Source	0.5	10	ms	-
T ₁₄	Source	0.5	10	ms	-
T ₁₅	Source	10	-	ms	-
T ₁₆	Source	10	-	ms	-
T ₁₇	Source	0	-	ms	-
T ₁₈	Source	0	-	ms	-
T ₁₉	Source	20	-	ms	-

- Note: 1. Do not insert the mating cable when system turn on
 2. Valid Data have to meet "3-3. eDP Signal Timing Specifications"
 3. Video Signal, LED_EN and PWM need to be on pull-down condition on invalid status.
 4. LGD recommend the rising sequence of VLED after the Vcc and valid status of Video Signal turn on.
 5. Driving signal of B/L must be "On" after normal video signal (Normal operating data from source) input.
 6. When VCC off, LED EN must be dropped to low level within black video data.
 7. For stable operation of BL, Black video data have to meet min 100ms.



Product Specification

4. Optical Specification

Optical characteristics are determined after the unit has been 'ON' and stable for approximately 20 minutes in a dark environment at 25°C. The values specified are at an approximate distance 50cm from the LCD surface at a viewing angle of Φ and Θ equal to 0°.

FIG. 1 presents additional information concerning the measurement equipment and method.

FIG. 1 Optical Characteristic Measurement Equipment and Method

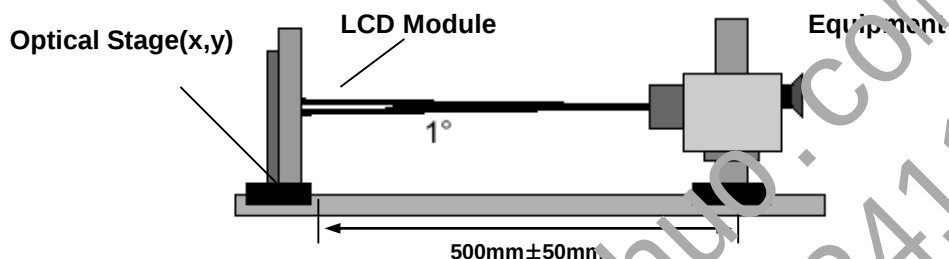


Table 7. OPTICAL CHARACTERISTICS

Ta=25°C, VCC=3.3V, fv=60Hz

Parameter		Symbol	Values			Units	Notes
			Min	Typ	Max		
Contrast Ratio		CR	1000	1200	-		1
Surface Luminance, white		L _{WH}	297	350	-	cd/m ²	2
Luminance Variation		$\delta_{\text{WHITE}}(5P)$	-	1.2	1.4	-	3
		$\delta_{\text{WHITE}}(13P)$	-	1.4	1.6		
Response Time		Tr + Tf	-	30	40	ms	4
Color Coordinates	RED	Rx	Typical - 0.025	0.680	Typical + 0.025		5
		Ry		0.320			
	GREEN	Gx		0.265			
		Gy		0.695			
	BLUE	Bx		0.150			
		By		0.050			
	WHITE	Wx		0.313			
		Wy		0.329			
Viewing Angle	x axis, right($\Phi=0^\circ$)	Θ_r	80	85	-	Degree	6
	x axis, left ($\Phi=180^\circ$)	Θ_l	80	85	-		
	y axis, up ($\Phi=90^\circ$)	Θ_u	80	85	-		
	y axis, down ($\Phi=270^\circ$)	Θ_d	80	85	-		
Gray Scale			-	-	-		7
Color Gamut (DCI)		%	95	99	-		



Product Specification

Note)

1. It should be measured in the center of screen(1 Point). Contrast Ratio(CR) is defined mathematically as

$$CR = \frac{\text{Surface Luminance at Full White condition}(P1)}{\text{Surface Luminance at Full Black condition}(P1)}$$

2. Surface luminance is the average of 5 point across the LCD surface 50cm from the surface with all pixels displaying white. For more information see FIG 2.

$$L_{WH} = \text{average luminance}(P1, P2, P3, P4, P5)$$

3. The variation in surface luminance , The panel total variation (δ WHITE) is determined by measuring γ at each test position 1 through 13 and then defined as following numerical formula.
For more information see FIG 2.

$$\delta_{WHITE(5P)} = \frac{\text{Maximum Luminance}(P1, P2, P3, P4, P5)}{\text{Minimum Luminance}(P1, P2, P3, P4, P5)}$$

$$\delta_{WHITE(13P)} = \frac{\text{Maximum Luminance}(P1, P2, \dots, P12, P13)}{\text{Minimum Luminance}(P1, P2, \dots, P12, P13)}$$

4. Response time is the time required for the display to transition from black to white (rise time, Tr) and from white to black (falling time, Tf). For additional information see FIG 3.

5. . It should be measured in the center of screen (P1).

6. Viewing angle is the angle at which the contrast ratio is greater than 10. The angles are determined for the horizontal or x axis and the vertical or y axis with respect to the z axis which is normal to the LCD surface. For more information see FIG 4.

7. Gray scale specification

Gray Level	Luminance [%] (Typ)
L0	0.05
L31	1.09
L63	4.99
L95	12.04
L127	22.44
L159	36.32
L191	53.82
L223	75.01
L255	100

Product Specification

FIG. 2 Luminance

<Measuring point for Average Luminance & measuring point for Luminance variation>

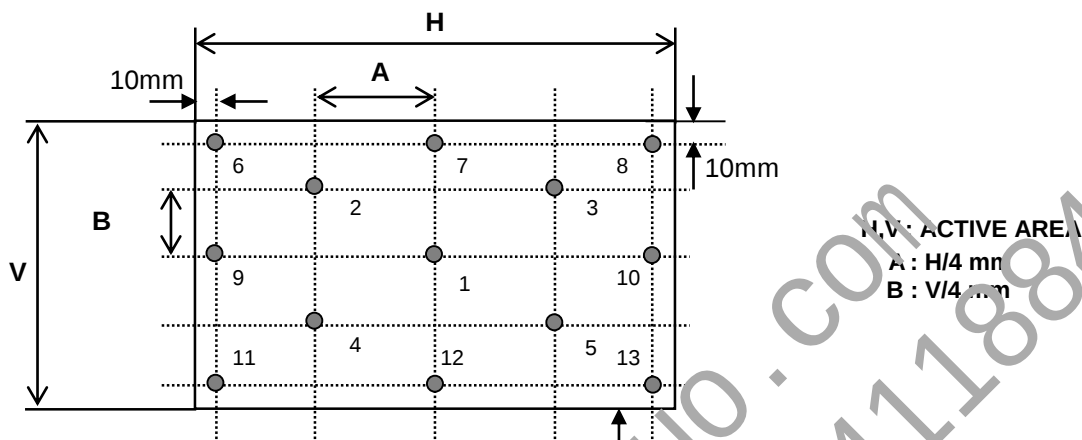


FIG. 3 Response Time

Active Area

The response time is defined as the following figure and shall be measured by switching the input signal for "black" and "white".


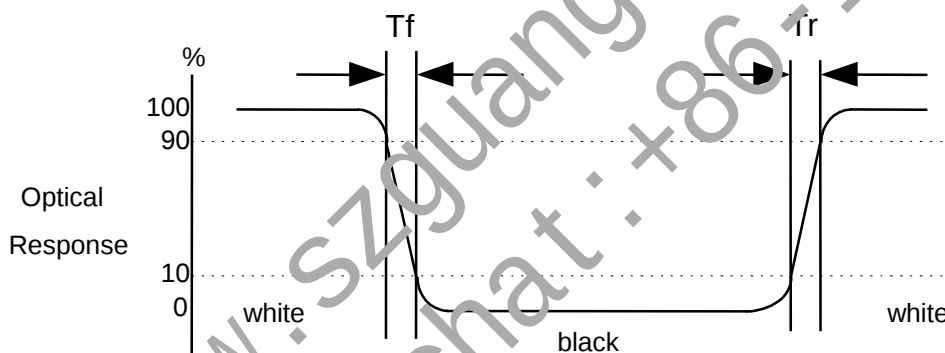


FIG. 4 Viewing angle

<Dimension of viewing angle range>



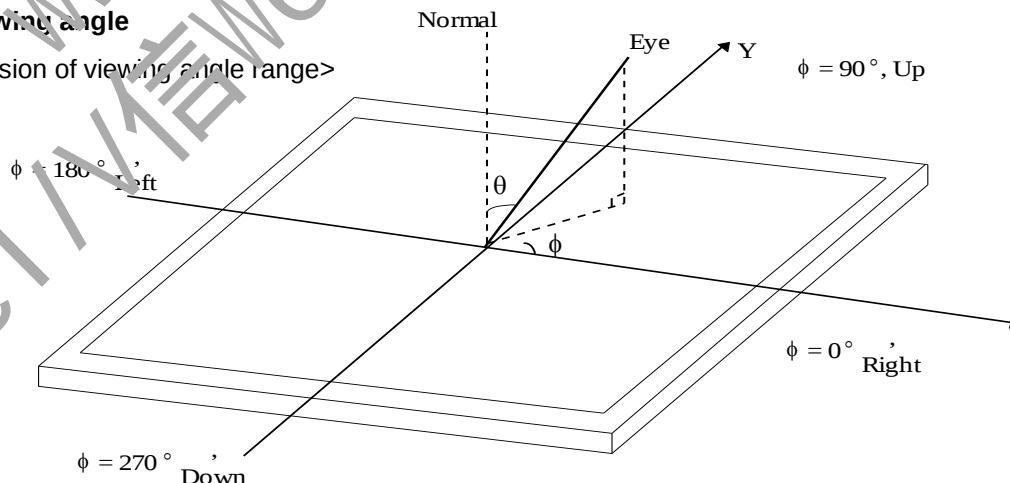

Product Specification

5. Mechanical Characteristics

The contents provide general mechanical characteristics for the model LP140WU1. In addition the figures in the next page are detailed mechanical drawing of the LCD.


Outline Dimension	Horizontal	$306.59 \pm 0.3 \text{ mm}$
	Vertical	$197.85 \pm 0.3 \text{ mm}$
	Thickness	2.10 mm (max, w/o PCB) / 3.80 mm (Max, with PCB)
Upper Polarizer Dimension	Horizontal	$303.99 \pm 0.2 \text{ mm}$
	Vertical	$190.90 \pm 0.2 \text{ mm}$
Active Display Area	Horizontal	$301.59 \pm 0.15 \text{ mm}$
	Vertical	$188.50 \pm 0.15 \text{ mm}$
Weight	170g (Typ.) / 178g (Max.)	
Surface Treatment	Anti-Glare treatment of the front polarizer (AG)	

Product Specification

<FRONT VIEW>

Notes (Measurement method refer to the Appendix C)

- 1) Unit[mm], General tolerance : $\pm 0.5\text{mm}$
- 2) System Bracket Angle Spec : $87 \pm 2^\circ$
- 3) All components except cover shield of LCM is under upper POL.

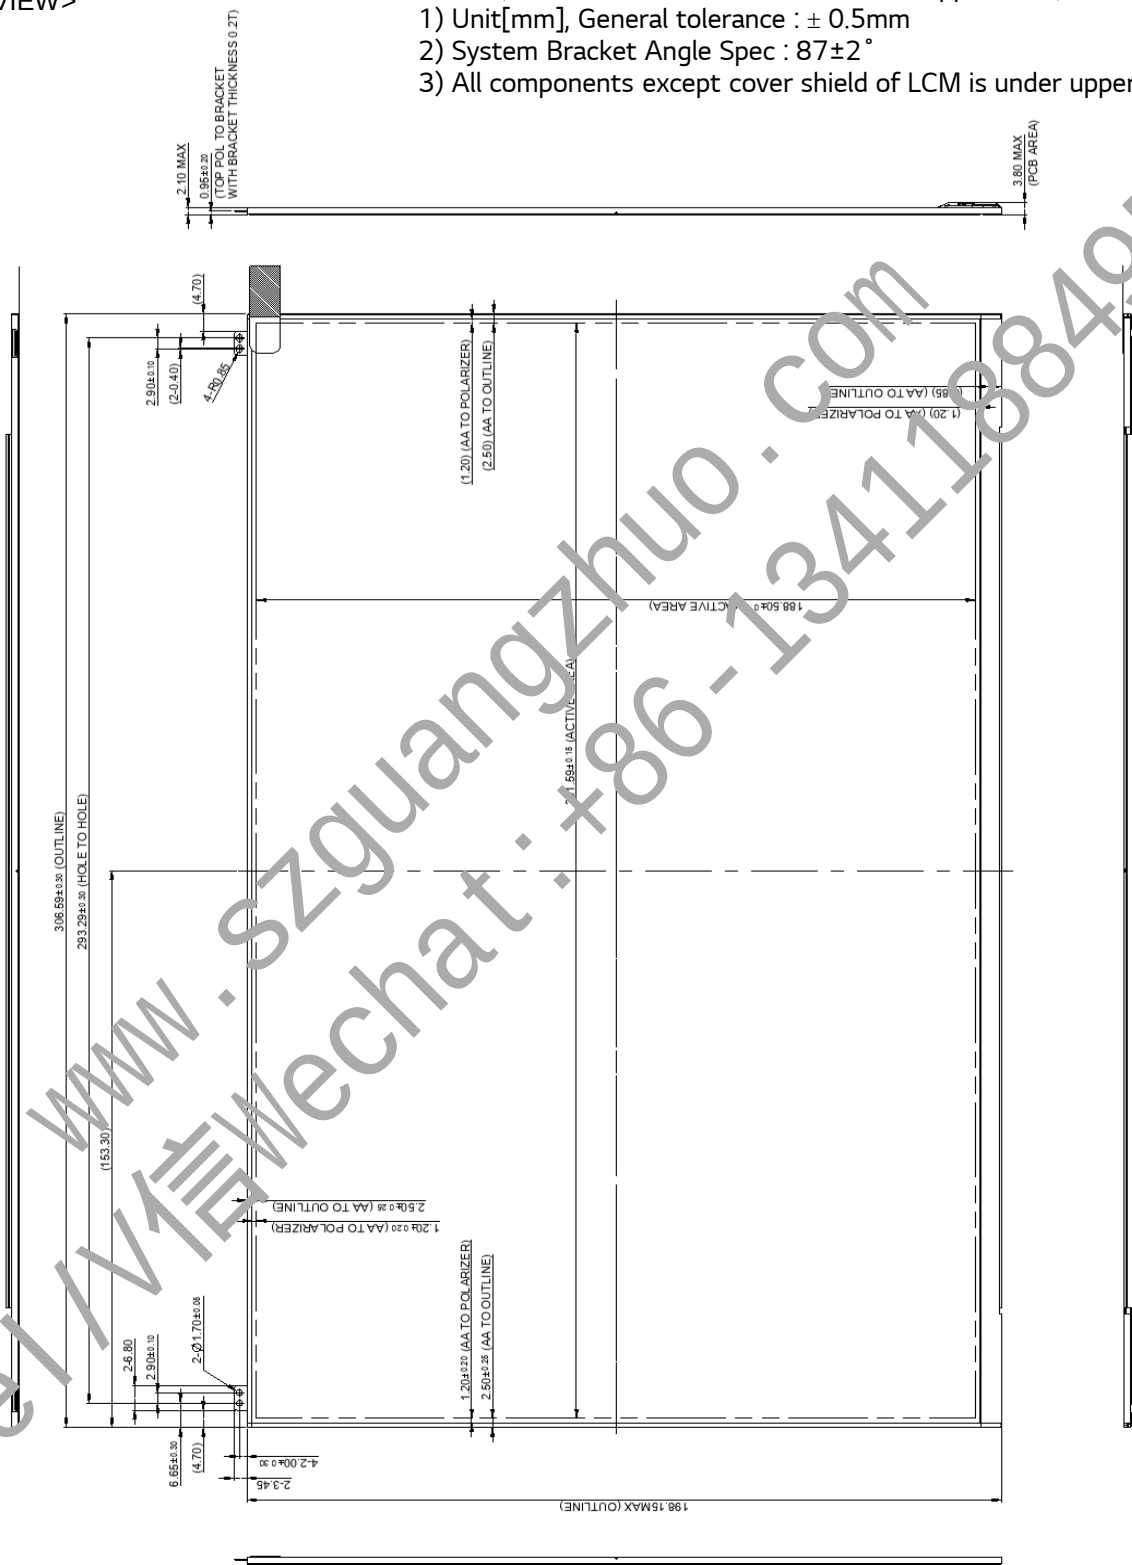




Product Specification

<REAR VIEW>

Notes

- 1) Unit[mm], General tolerance : $\pm 0.5\text{mm}$
- 2) LCM Label Information refer to the page 26.

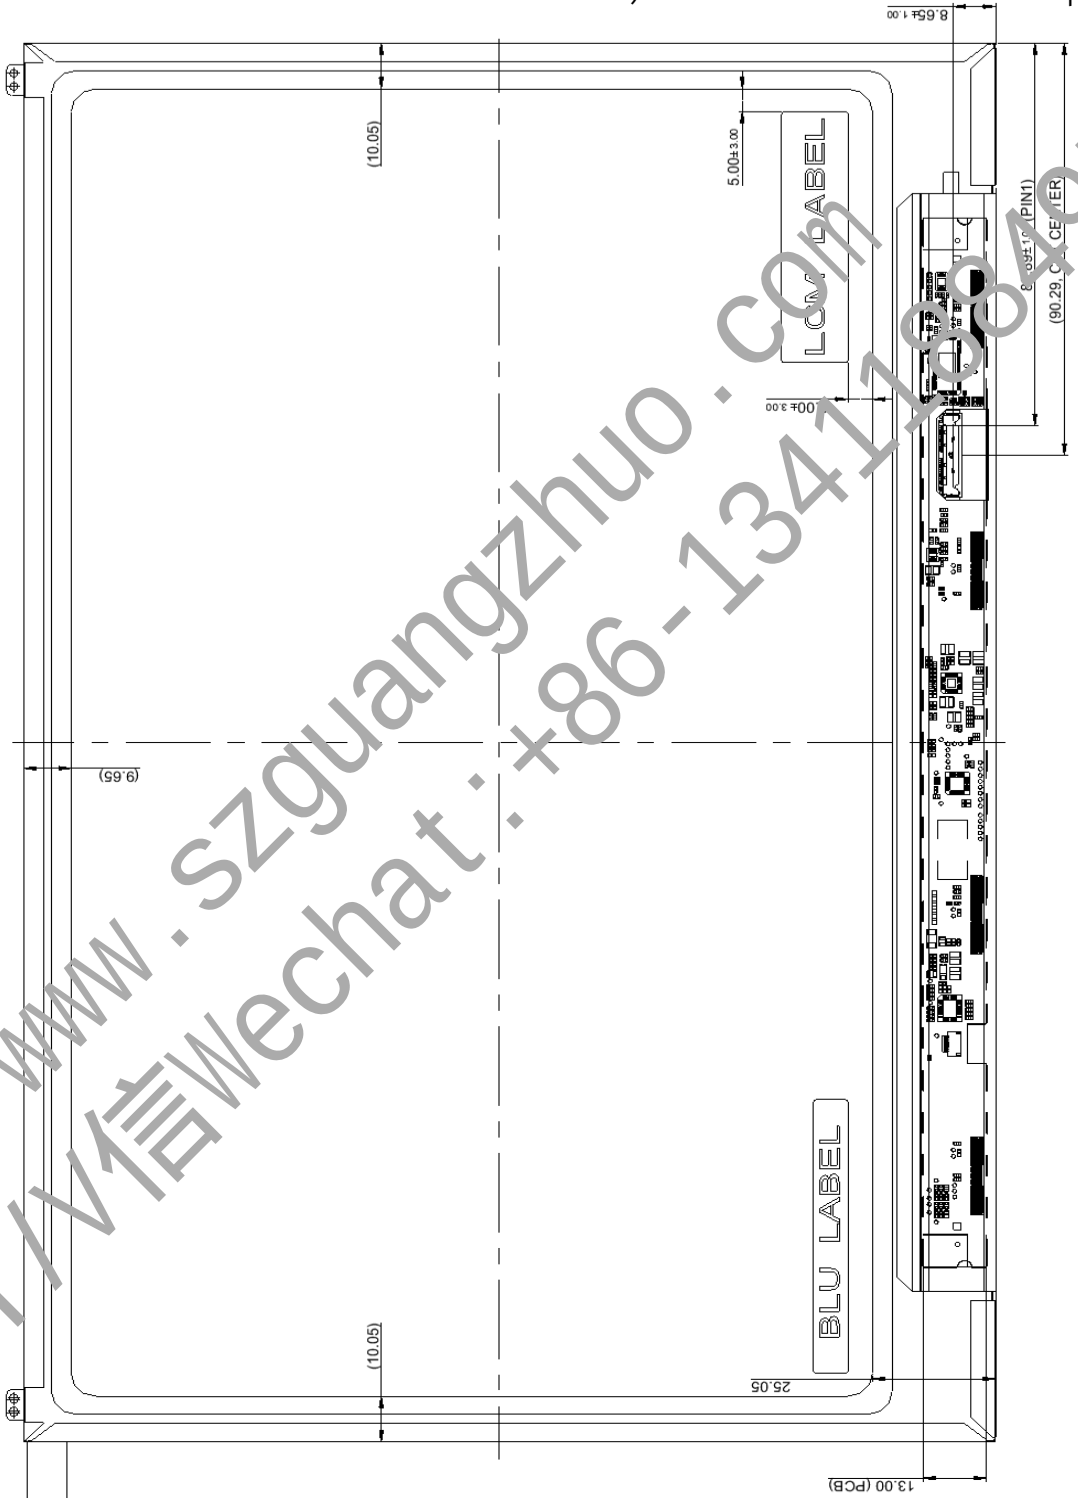

Product Specification

6. Reliability

Environment test condition

No.	Test Item	Conditions
1	High temperature storage test	Ta= 60°C, 240h
2	Low temperature storage test	Ta= -20°C, 240h
3	High temperature operation test	Ta= 50°C, 50%RH, 240h
4	Low temperature operation test	Ta= 0°C, 240h
5	Vibration test (non-operating)	Random, 1.0Grms, 10 ~ 300Hz(PSD 0.0025) 3 axis, 30min/axis
6	Shock test (non-operating)	- No functional or cosmetic defects following a shock to all 6 sides delivering at least 180 G in a half sine pulse no longer than 2 ms to the display module - No functional defects following a shock delivering at least 200 g in a half sine pulse no longer than 2 ms to each of 6 sides. Each of the 6 sides will be shock tested with one each display, for a total of 6 displays
7	Altitude operating storage / shipment	0 ~ 10,000 feet (3,048m) 24Hr 0 ~ 40,000 feet (12,192m) 24Hr
8	ESD	± 8kV for contact discharge ± 15kV for air discharge

[Result Evaluation Criteria]

1. Comparing the initial functional FOS status, there should be no major change which might affect the practical display function when the display reliability test is conducted.
2. After conduct reliability tests, LGD guarantees only functional FOS quality.
3. In the Reliability Test, Confirm performance after leaving in room temp.
4. In the standard condition, there shall be no practical problems that may affect the display function 24 hours later after reliability test. After the reliability test, we can guarantee the product only when the corrosion is causing its malfunction. The corrosion causing no functional defect can not be guaranteed.



Product Specification

7. International Standards

7-1. Safety

- a) IEC 62368-1, The International Electro-technical Commission(IEC).
Audio/video, Information and Communication Technology Equipment - Safety - Safety Requirements.
- b) EN 62368-1, European Committee for Electro-technical Standardization (CENELEC)
Audio/video, Information and Communication Technology Equipment - Safety Requirements
- c) UL 62368-1, UL LLC.
Audio/video, Information and Communication Technology Equipment - Safety Requirements
- d) CAN/CSA C22.2 No.62368-1, Canadian Standards Association (CSA)
Audio/video, Information and Communication Technology Equipment - Safety Requirements
- e) IEC 60950-1, The International Electro technical Commission (IEC).
Information Technology Equipment - Safety - Part 1 : General Requirements

7-2. Environment


- a) RoHS, Directive 2011/65/EU of the European Parliament and of the council of 8 June 2011



Product Specification

8. Packing

8-1. Designation of Lot Mark

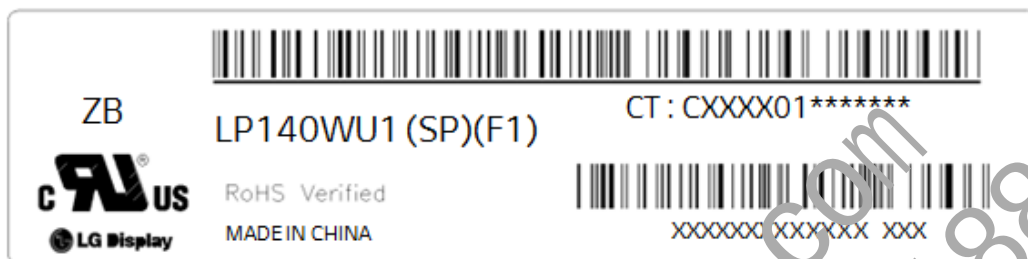

a) Lot Mark

A	B	C	D	E	F	G	H	I	J	K	L	M
---	---	---	---	---	---	---	---	---	---	---	---	---

A,B,C : SIZE(INCH)

E : MONTH

D : YEAR

F : SERIAL NO.

Note

1. YEAR

Year	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029
Mark	K	L	M	N	P	R	S	T	U	V

2. MONTH

Month	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Mark	1	2	3	4	5	6	7	8	9	A	B	C

b) Location of Lot Mark

Serial No. is printed on the label. The label is attached to the backside of the LCD module.
This is subject to change without prior notice.



8-2. Packing Form

a) Package quantity in one box : 20pcs

b) Box Size : 410 * 278 * 244



8-3. Packing Assembly



4 LCM / Tray




5 Tray / Bpx

20LCM/Box

2EA Desiccant in the box



(Sheet + LCM) x4

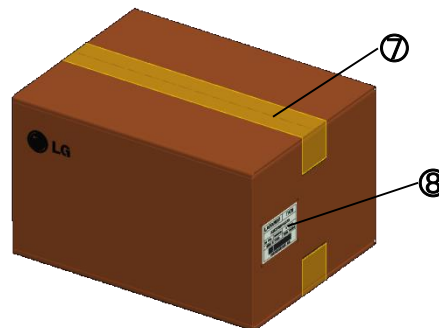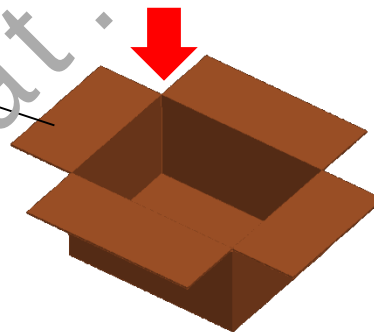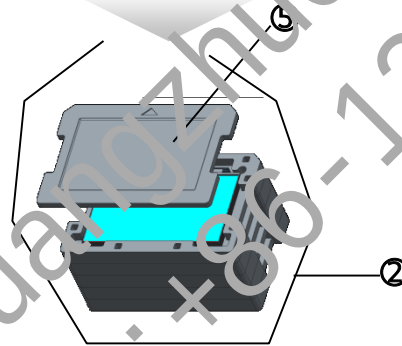


NO.	DESCRIPTION	MATERIAL
1	LCD Module	
2	BAG	AL
3	Sheet	PE
4	Bottom Tray	EPO
5	Top Tray	EPO
6	BOX	SWR4
7	TAPE	OPP 70MMX300M
8	LABEL	ART 100X70




Product Specification

8-3. Packing Assembly (Pallet)


1. Pallet

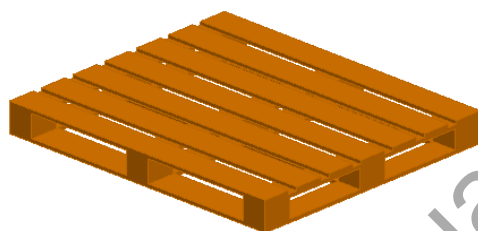


2. 3 x 2 x 4 Box Pattern

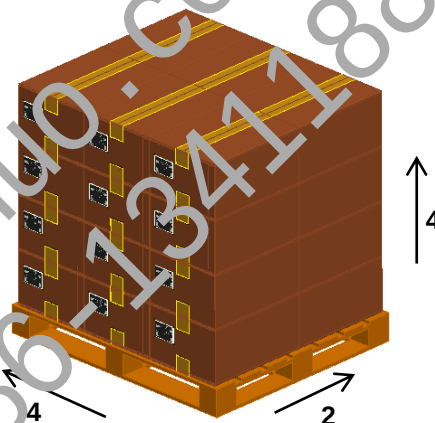

3. Angle Packing & Taping

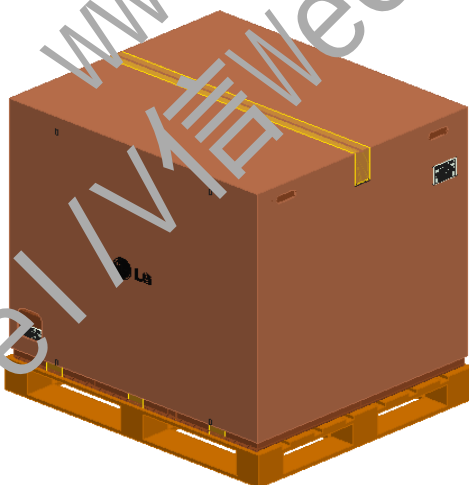

4. Banding

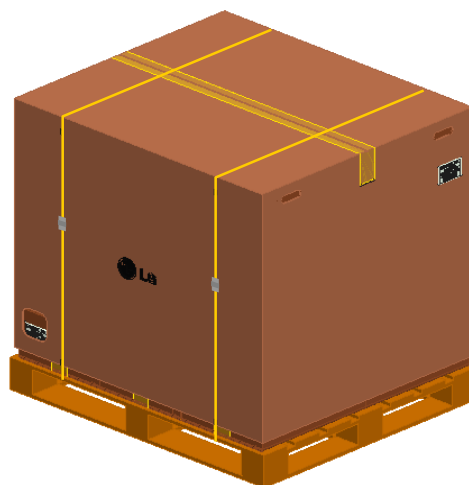





Product Specification

8-4. Precautions for unpacking the Box


a.) Don't throw or tilt the box and put it on a flat surface.

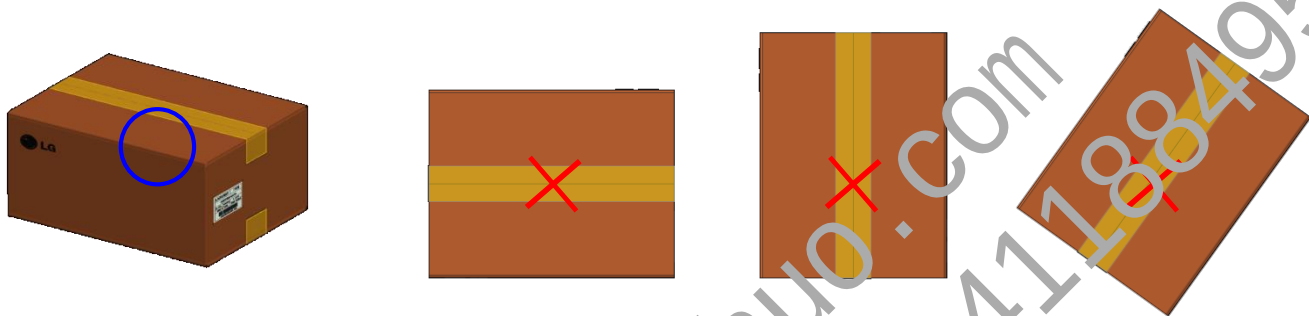

b.) Place the box on a flat floor and Take out the AL bag vertically.

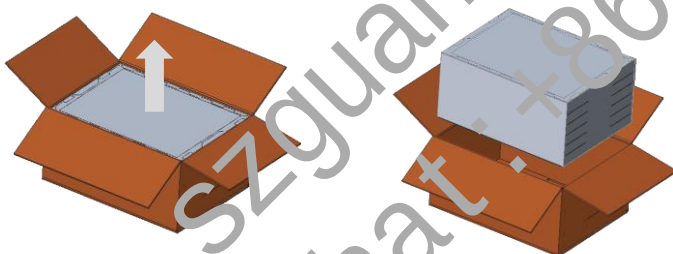

c.) Cut the tape on the side of the bag with a knife and Take out the tray horizontally.

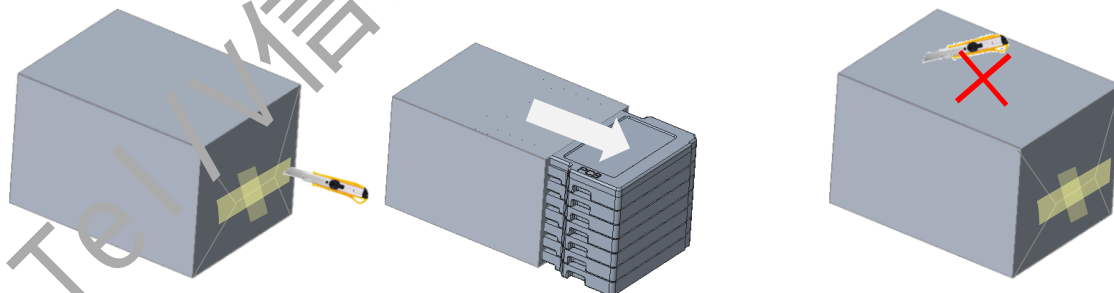



**Caution : Do not cut the top of the bag with a knife.
(The Knife can damage product)**



Product Specification



8-5. Precautions for Handling tray

- a.) Hold center of short or long side of the tray with both hands when handling one or more trays.

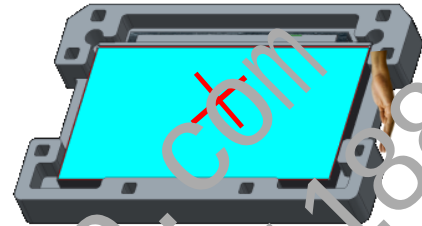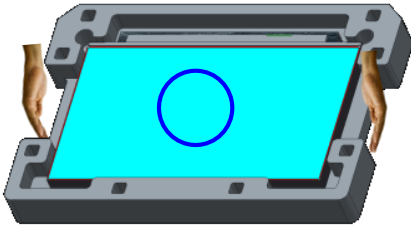


Caution : Do not handle with only one hand.

- b.) Always place tray on flat surface and Don't tilt with one hand to take out.

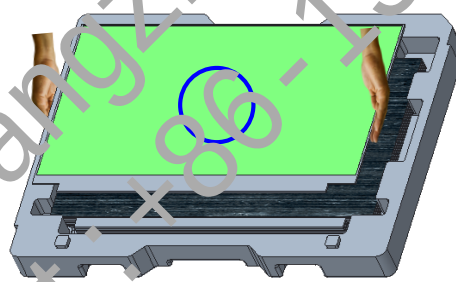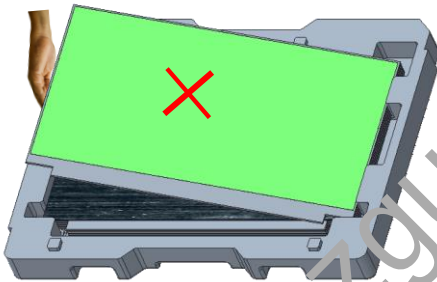

- c.) When stacking trays, Please align same position of the hollows of each tray.
- Two corner is Chamfer corner

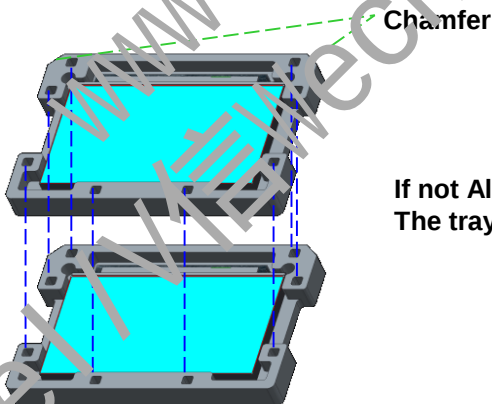

If not Aligned,
The tray may slip without being loaded.

- d.) The maximum stacking quantity is equal to the number of loads per box.
- Recommended as above because heavier weight can cause muscular skeletal disease and operator handling errors.



Product Specification

9. PRECAUTIONS

Please pay attention to the followings when you use this TFT LCD module.

9-1. MOUNTING PRECAUTIONS

- (1) You must mount a module using holes arranged in four corners or four sides.
- (2) You should consider the mounting structure so that uneven force (ex. Twisted stress) is not applied to the module. And the case on which a module is mounted should have sufficient strength so that external force is not transmitted directly to the module.
- (3) Please attach the surface transparent protective plate to the surface in order to protect the polarizer. Transparent protective plate should have sufficient strength in order to resist external force.
- (4) You should adopt radiation structure to satisfy the temperature specification.
- (5) Acetic acid type and chlorine type materials for the cover case are not desirable because the former generates corrosive gas of attacking the polarizer at high temperature and the latter causes circuit break by electro-chemical reaction.
- (6) Do not touch, push or rub the exposed polarizers with glass, tweezers or anything harder than HB pencil lead. And please do not rub with dust clothes with chemical treatment. Do not touch the surface of polarizer for bare hand or greasy cloth. (Some cosmetics are detrimental to the polarizer.)
- (7) When the surface becomes dusty, please wipe gently with absorbent cotton or other soft materials like chamois soaks with petroleum benzene. Normal-hexane is recommended for cleaning the adhesives used to attach front / rear polarizers. Do not use acetone, toluene and alcohol because they cause chemical damage to the polarizer.
- (8) Wipe off saliva or water drops as soon as possible. Their long time contact with polarizer causes deformations and color fading.
- (9) Do not open the case because inside circuits do not have sufficient strength.

9-2. OPERATING PRECAUTIONS

- (1) The spike noise causes the mis-operation of circuits. It should be lower than following voltage :
 $V = \pm 200mV$ (Over and under 500V voltage)
- (2) Response time depends on the temperature. (In lower temperature, it becomes longer.)
- (3) Brightness depends on the temperature. (In lower temperature, it becomes lower.)
And in lower temperature, response time (required time that brightness is stable after turned on) becomes longer.
- (4) Be careful for condensation at sudden temperature change. Condensation makes damage to polarizer or electrical connected parts. And after fading condensation, smear or spot will occur.
- (5) When fixed patterns are displayed for a long time, remnant image is likely to occur.
- (6) Module has high frequency circuits. Sufficient suppression to the electromagnetic interference shall be done by system manufacturers. Grounding and shielding methods may be important to minimized the interference.



Product Specification

9-3. ELECTROSTATIC DISCHARGE CONTROL

Since a module is composed of electronic circuits, it is not strong to electrostatic discharge. Make certain that treatment persons are connected to ground through wrist band etc. And don't touch interface pin directly.

9-4. PRECAUTIONS FOR STRONG LIGHT EXPOSURE

Strong light exposure causes degradation of polarizer and color filter.

9-5. STORAGE

When storing modules as spares for a long time, the following precautions are necessary.

- (1) Store them in a dark place. Do not expose the module to sunlight or fluorescent light. Keep the temperature between 5°C and 35°C at normal humidity.
- (2) The polarizer surface should not come in contact with any other object.
It is recommended that they be stored in the container in which they were shipped.

9-6. HANDLING PRECAUTIONS FOR PROTECTION FILM

- (1) When the protection film is peeled off, static electricity is generated between the film and polarizer. This should be peeled off slowly and carefully by people who are electrically grounded and with well ion-blown equipment or in such a condition, etc.
- (2) The protection film is attached to the polarizer with a small amount of glue. If some stress is applied to rub the protection film against the polarizer during the time you peel off the film, the glue is apt to remain on the polarizer.
Please carefully peel off the protection film without rubbing it against the polarizer.
- (3) When the module with protection film attached is stored for a long time, sometimes there remains a very small amount of glue still on the polarizer after the protection film is peeled off.
- (4) You can remove the glue easily. When the glue remains on the polarizer surface or its vestige is recognized, please wipe them off with absorbent cotton waste or other soft material like chamois soaked with normal-hexane.

9-7. THE LGD QA RESPONSIBILITY WILL BE AVOIDED IN CASE OF BELOW

- (1) When the customer attaches cover glass on LCM without Supplier's approval.
- (3) When the LCMs were repaired by 3rd party without Supplier's approval.
- (4) When the LCMs were treated like Disassemble and Rework by the Customer and/or Customer's representatives without supplier's approval.