

PROPRIETARY NOTE

THIS SPECIFICATION IS THE PROPERTY OF BOE BJ AND SHALL NOT BE REPRODUCED OR COPIED WITHOUT THE WRITTEN PERMISSION OF BOE BJ AND MUST BE RETURNED TO BOE BJ UPON ITS REQUEST

BOE

SPEC. NUMBER

PRODUCT GROUP

Rev.

ISSUE DATE

PAGE

LCM

P3

2017.02.09

1 OF 30

NV133FHM-N61**Final Product Specification****Rev. P3**

CHONGQING BOE OPTOELECTRONICS TECHNOLOGY CO.,LTD

PRODUCT GROUP		REV	ISSUE DATE	BOE
LCM PRODUCT		P3	2017.02.09	
SPEC. NUMBER	SPEC. TITLE NV133FHM-N61 Final Product Specification			PAGE 2 OF 30
REVISION HISTORY				
REV.	ECN No.	DESCRIPTION OF CHANGES	DATE	PREPARED
P0	-	Lable&Circuit&Mech	2016.08.04	Liyunsong
P1	-	Lable&EDID	2016.10.14	Liyunsong
P2	-	Label position& height of LCM	2016.10.31	Liyunsong
P3	-	Final Spec	2017.02.09	Liyunsong

2

PRODUCT GROUP		REV	ISSUE DATE	BOE
LCM PRODUCT		P3	2017.02.09	
SPEC. NUMBER	SPEC. TITLE			PAGE
	NV133FHM-N61 Final Product Specification			3 OF 30

Contents

No.	Items	Page
	REVISION HISTORY	2
	CONTENTS	3
1.0	General Description	4
2.0	Absolute Maximum ratings	6
3.0	Electrical specifications.	7
4.0	Optical specifications.	10
5.0	Interface Connection	15
6.0	Signal Timing Specification	18
7.0	Horizontal Timing Waveforms	20
8.0	Input Signals, Basic Display Colors & Gray Scale Of Colors	21
9.0	Power Sequence	22
10.0	Reliability Test	24
11.0	Handling & Cautions.	24
12.0	Label	25
13.0	Packing information	27
14.0	Mechanical Outline Dimension	28
15.0	EDID Table	30

PRODUCT GROUP		REV	ISSUE DATE	BOE
LCM PRODUCT		P3	2017.02.09	
SPEC. NUMBER	SPEC. TITLE NV133FHM-N61 Final Product Specification			PAGE 4 OF 30

1.0 General Description

1.1 Application

- Notebook PC Without Touch function

1.2 General Specification

1.2.1.General LCM Specification(Table 1.)

<Table 1. General Specifications>

Parameter	Specification	Unit	Remarks
Active area	293.76 (H) x 165.24 (V)	mm	
Number of pixels	1920 (H) x 1080 (V)	pixels	
Pixel pitch	0.153 (H) x 0.153 (V)	mm	
Pixel arrangement	RGB Vertical stripe		
Display colors	262K	colors	
Display mode	Normally Black		
Dimensional outline	300.56(H)*188.25(V) (W/PCB)*2.45(Max) 300.56(H)*177.69(V)*2.45(Max)	mm	
Weight	215(max)	g	
Back-light	Lower Down side, 1-LED Lighting Bar type		Note 1
Power consumption	P _D : 0.9	W	@mosaic pattern
	P _{BL} :2.9(max.)	W	
	3.8(Type.)	W	

Notes : 1. LED Lighting Bar (36*LED Array)

PRODUCT GROUP		REV	ISSUE DATE	BOE
LCM PRODUCT		P3	2017.02.09	
SPEC. NUMBER	SPEC. TITLE NV133FHM-N61 Final Product Specification			PAGE 5 OF 30

2.0 ABSOLUTE MAXIMUM RATINGS


The followings are maximum values which, if exceed, may cause faulty operation or damage to the unit. The operational and non-operational maximum voltage and current values are listed in Table 2.

< Table 2. Absolute Maximum Ratings >

Ta: 25+/-2°C

Parameter	Symbol	Min.	Max.	Unit	Remarks
Power Supply Voltage	V _{DD}	-0.5	4.0	V	Note 1
Logic Supply Voltage	V _{IN}	V _{SS} -0.3	V _{DD} +0.3	V	
Operating Temperature	T _{OP}	0	+50	°C	Note 2
Storage Temperature	T _{ST}	-20	+60	°C	

- Notes : 1. Permanent damage to the device may occur if maximum values are exceeded functional operation should be restricted to the condition described under normal operating conditions.
2. Temperature and relative humidity range are shown in the figure below.
 95 % RH Max. (40 °C ≥ Ta)
 Maximum wet - bulb temperature at 39 °C or less. (Ta > 40 °C) No condensation.

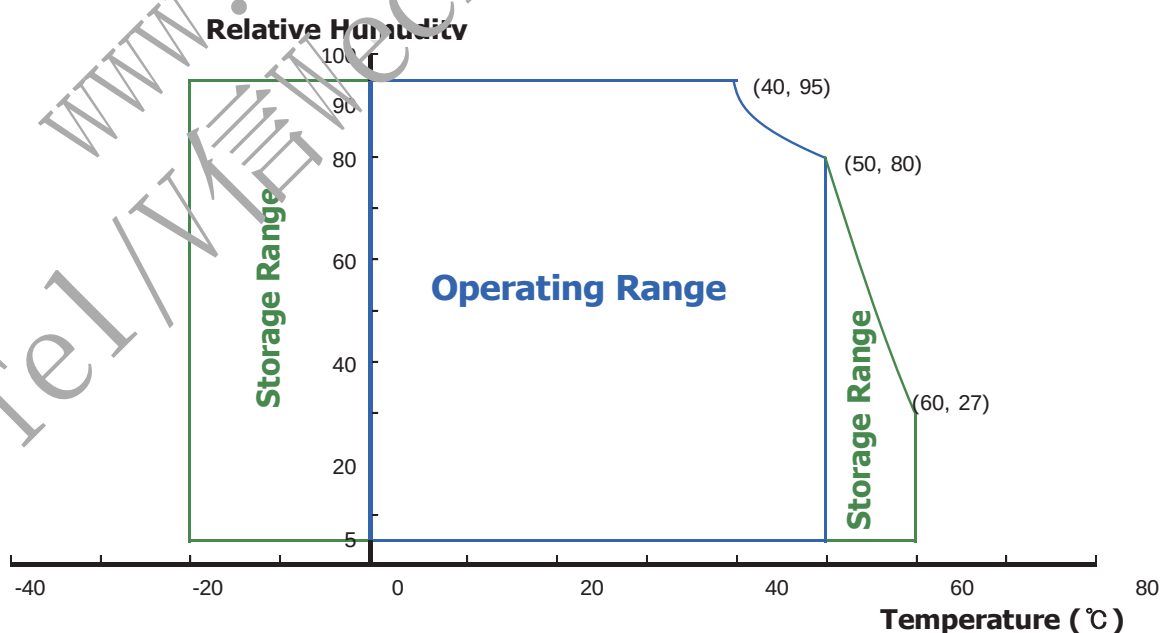

PRODUCT GROUP		REV	ISSUE DATE	BOE
LCM PRODUCT		P3	2017.02.09	
SPEC. NUMBER	SPEC. TITLE NV133FHM-N61 Final Product Specification			PAGE 6 OF 30

3.0 ELECTRICAL SPECIFICATIONS

3.1 Electrical Specifications

< Table 3. Electrical specifications >

Ta=25+/-2°C

Parameter		Min.	Typ.	Max.	Unit	Remarks
Power Supply Voltage	V _{DD}	3.0	3.3	3.6	V	Note 1
Permissible Input Ripple Voltage	V _{RF}	-	-	100	mV	At V _{DD} = 3.3V
Power Supply Current	I _{DD}	-	273	-	mA	Note 1
Differential Input Voltage	V _{ID}	120	-	1200	mV	
Power Consumption	P _D	-	0.9	1.5	W	Note 1
	P _{BL}	-	2.9	-	W	Note 2
	P _{total}	-	3.8	-	W	

Notes : 1. The supply voltage is measured and specified at the interface connector of LCM.
The current draw and power consumption specified is for 3.3V at 25°C.

a) Typ : Mosaic Pattern

b) Max : RGB

2. Calculated value for reference (V_{LED} × I_{LED})

PRODUCT GROUP		REV	ISSUE DATE	BOE
LCM PRODUCT		P3	2017.02.09	
SPEC. NUMBER	SPEC. TITLE NV133FHM-N61 Final Product Specification			PAGE 7 OF 30

3.2 Backlight Unit

< Table 4. LED Driving guideline specifications >

Ta=25+/-2°C

Parameter		Min.	Typ.	Max.	Unit	Remarks
LED Forward Voltage	V _F	-	-	2.3	V	-
LED Forward Current	I _F	-	23.5	-	mA	-
LED Power Consumption	P _{LED}	-	2.7	-	W	Note 1
LED Life-Time	N/A	15,000	-	-	Hour	I _F = 23.5mA
Power supply voltage for LED Driver	V _{LED}	6	12	21	V	
EN Control Level	Backlight on	2.0	-	5.0	V	
	Backlight off	0	-	0.8	V	
PWM Control Level	PWM High Level	2.0	-	5.0	V	
	PWM Low Level	0	-	0.8	V	
PWM Control Frequency	F _{PWM}	200	-	10,000	Hz	
Duty Ratio	-	1	-	100	%	

Notes : 1. Power supply voltage 12V for LED Driver


Calculator Value for reference $I_F \times V_F \times 36 / \text{efficiency} = P_{LED}$

2. The LED Life-time define as the estimated time to 50% degradation of initial luminous.

3. 1% duty cycle is achievable with a dimming frequency less than 1KHz.

PRODUCT GROUP		REV	ISSUE DATE	BOE
LCM PRODUCT		P3	2017.02.09	
SPEC. NUMBER	SPEC. TITLE			PAGE
	NV133FHM-N61 Final Product Specification			8 OF 30

3.3 LED structure

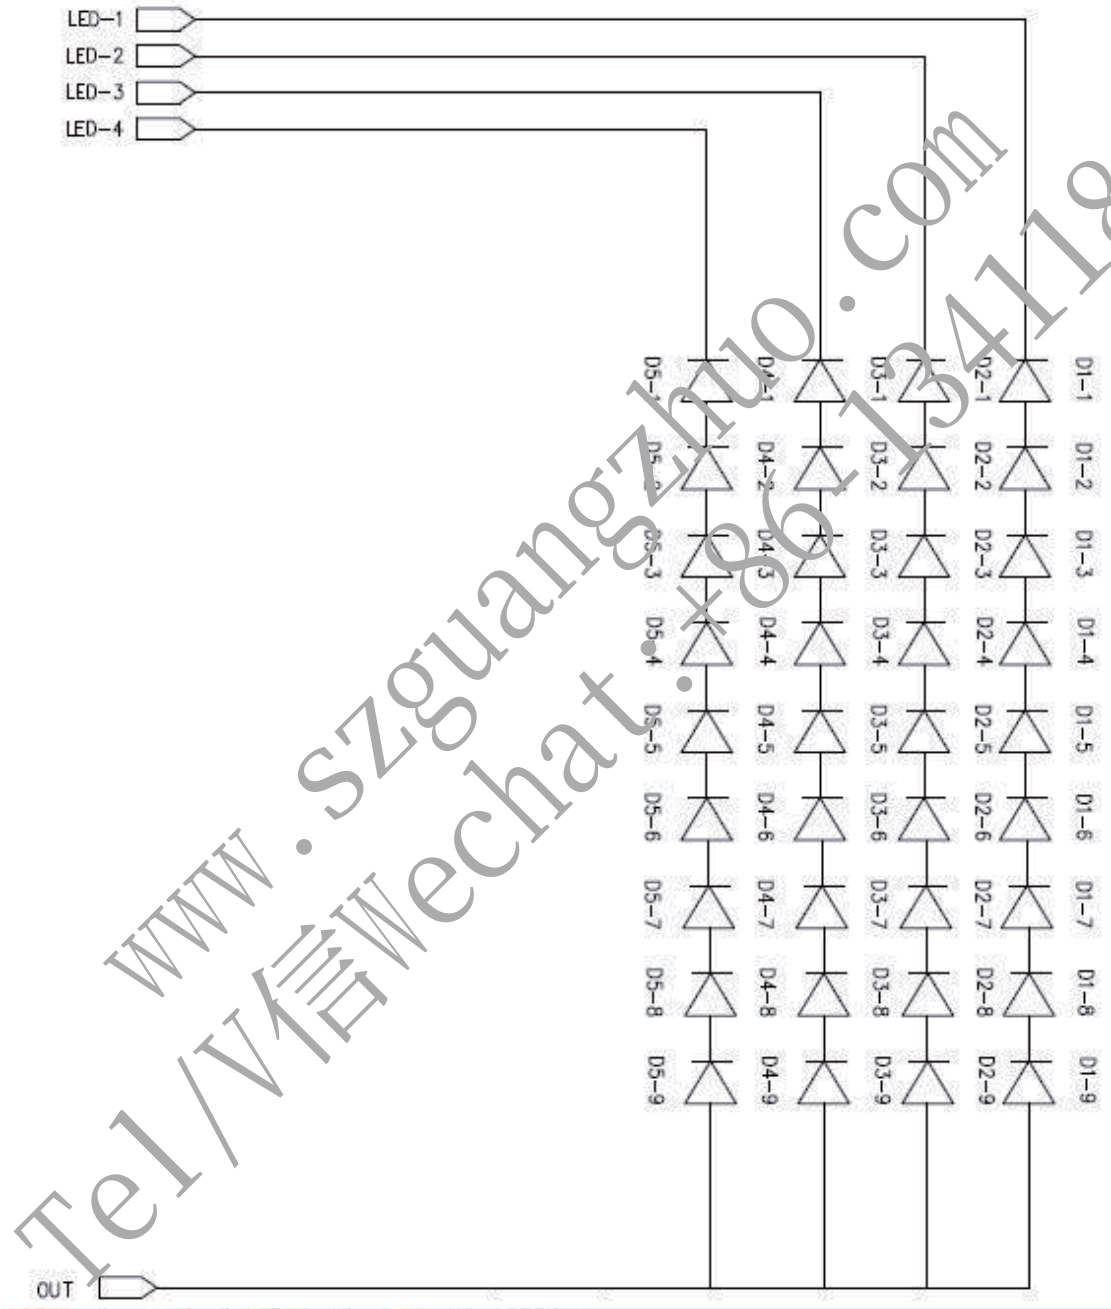

PRODUCT GROUP		REV	ISSUE DATE	BOE
LCM PRODUCT		P3	2017.02.09	
SPEC. NUMBER	SPEC. TITLE			PAGE
	NV133FHM-N61 Final Product Specification			9 OF 30

4.0 OPTICAL SPECIFICATION

4.1 Overview

The test of Optical specifications shall be measured in a dark room (ambient luminance ≤ 1 lux and temperature = $25 \pm 2^\circ\text{C}$) with the equipment of Luminance meter system (Goniometer system and TOPCON BM-5) and test unit shall be located at an approximate distance 50cm from the LCD surface at a viewing angle of θ and Φ equal to 0° . We refer to $\theta=0$ ($=\theta_3$) as the 3 o'clock direction (the "right"), $\theta=90$ ($=\theta_{12}$) as the 12 o'clock direction ("upward"), $\theta=180$ ($=\theta_9$) as the 9 o'clock direction ("left") and $\theta=270$ ($=\theta_6$) as the 6 o'clock direction ("bottom"). While scanning θ and/or Φ , the center of the measuring spot on the Display surface shall stay fixed. The backlight should be operating for 30 minutes prior to measurement. VDD shall be $3.3 \pm 0.3\text{V}$ at 25°C . Optimum viewing angle direction is 6 'clock.

4.2 Optical Specifications

<Table 5. Optical Specifications>

Parameter		Symbol	Condition	Min	Typ.	Max.	Unit	Remark
Viewing Angle range	Horizontal	Θ_3	$\text{CR} > 10$	-	85	-	Deg.	Note 1
		Θ_9		-	85	-	Deg.	
	Vertical	Θ_{12}		-	85	-	Deg.	
		Θ_6		-	85	-	Deg.	
Luminance Contrast ratio		CR	$\Theta = 0^\circ$	600	800	-	-	
Luminance of White	5 Points	Y_w	$\Theta = 0^\circ$ LED = 23.5mA	255	300	345	-	
White Luminance uniformity	5 Points	ΔY_5		80%	-	-	-	Type.
	13 Points	ΔY_{13}	65%	-	-	-		
White Chromaticity		x_w	$\Theta = 0^\circ$	0.283	0.313	0.343	-	
		y_w		0.299	0.329	0.359	-	
Reproduction of color	Red	x_R	$\Theta = 0^\circ$	-0.03	0.650	+0.03	-	
		y_R			0.345		-	
	Green	x_G			0.329		-	
		y_G			0.621		-	
	Blue	x_B			0.151		-	
		y_B			0.056		-	
Gamut		-	-	68	72	-	%	
Response Time (Rising + Falling)		T_{RT}	Ta= 25° C $\Theta = 0^\circ$	-	30	35	Ms	Note 6
Cross Talk		CT	$\Theta = 0^\circ$	-	-	2.0	%	Note 7

PRODUCT GROUP		REV	ISSUE DATE	BOE
LCM PRODUCT		P3	2017.02.09	
SPEC. NUMBER	SPEC. TITLE NV133FHM-N61 Final Product Specification			PAGE 10 OF 30

Notes :

1. Viewing angle is the angle at which the contrast ratio is greater than 10. The viewing angles are determined for the horizontal or 3, 9 o'clock direction and the vertical or 6, 12 o'clock direction with respect to the optical axis which is normal to the LCD surface (see FIGURE 1).

2. Contrast measurements shall be made at viewing angle of $\theta = 0$ and at the center of the LCD surface. Luminance shall be measured with all pixels in the view field set first to white, then to the dark (black) state .

(see FIGURE 1) Luminance Contrast Ratio (CR) is defined mathematically.

$$CR = \frac{\text{Luminance when displaying a white raster}}{\text{Luminance when displaying a black raster}}$$

3. Center Luminance of white is defined as luminance values of 5 point average across the LCD surface. Luminance shall be measured with all pixels in the view field set first to white. This measurement shall be taken at the locations shown in FIGURE 2 for a total of the measurements per display

4. The White luminance uniformity on LCD surface is then expressed as : $\Delta Y = \text{Minimum Luminance of 5(or 13) points} / \text{Maximum Luminance of 5(or 13) points}$.
(see FIGURE 2 and FIGURE 3).

5. The color chromaticity coordinates specified in Table 5 shall be calculated from the spectral data measured with all pixels first in red, green, blue and white. Measurements shall be made at the center of the panel.

6. The electro-optical response time measurements shall be made as FIGURE 4 by switching the "data" input signal ON and OFF. The times needed for the luminance to change from 10% to 90% is T_r , and 90% to 10% is T_d .

7. Cross-Talk of one area of the LCD surface by another shall be measured by comparing the luminance (Y_A) of a 25mm diameter area, with all display pixels set to a gray level, to the luminance (Y_B) of that same area when any adjacent area is driven dark.
(See FIGURE 5).

PRODUCT GROUP		REV	ISSUE DATE	BOE
LCM PRODUCT		P3	2017.02.09	
SPEC. NUMBER	SPEC. TITLE			PAGE
	NV133FHM-N61 Final Product Specification			11 OF 30

4.3 Optical measurements

Figure 1. Measurement Set Up



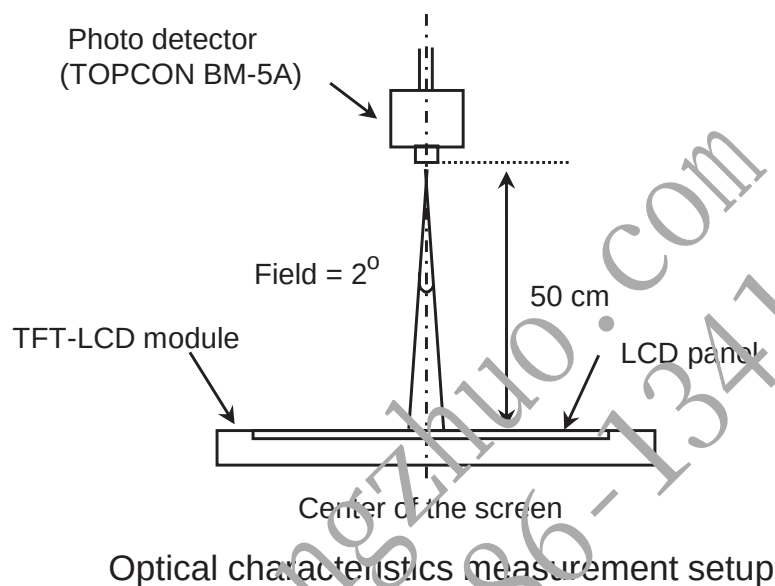


Figure 2. White Luminance and Uniformity Measurement Locations (5 points)

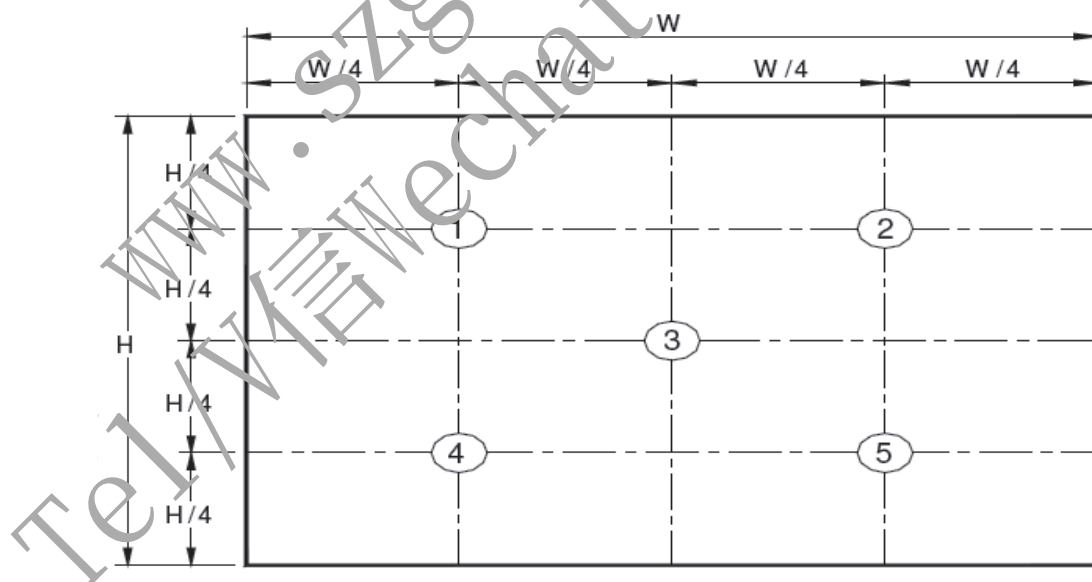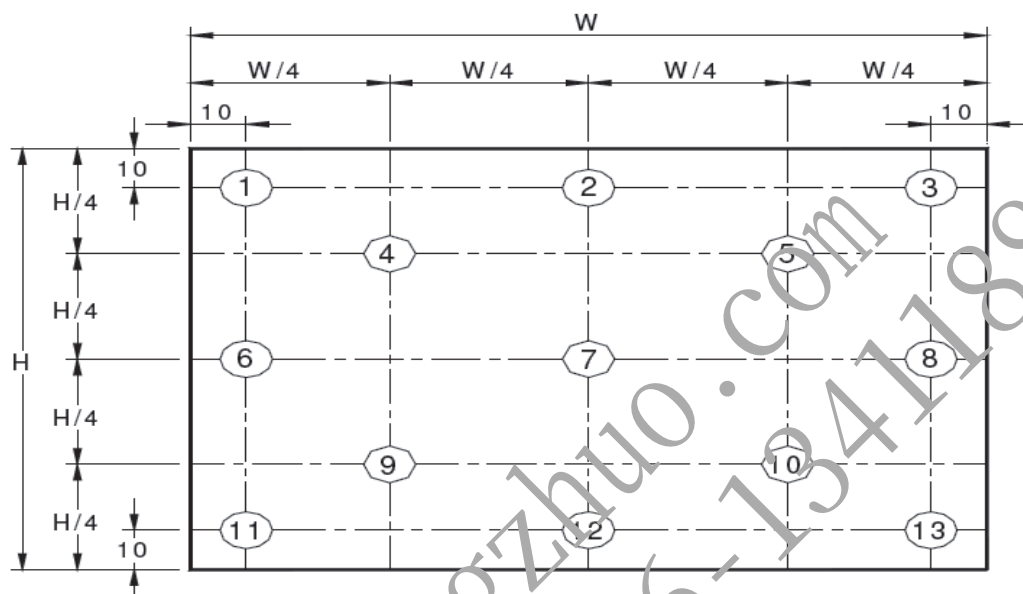


Center Luminance of white is defined as luminance values of center 5 points across the LCD surface. Luminance shall be measured with all pixels in the view field set first to white. This measurement shall be taken at the locations shown in FIGURE 2 for a total of the measurements per display.

PRODUCT GROUP		REV	ISSUE DATE	BOE
LCM PRODUCT		P3	2017.02.09	
SPEC. NUMBER	SPEC. TITLE			PAGE
	NV133FHM-N61 Final Product Specification			12 OF 30

Figure 3. Uniformity Measurement Locations (13 points)


The White luminance uniformity on LCD surface is then expressed as : $\Delta Y5 = \text{Minimum Luminance of five points} / \text{Maximum Luminance of five points}$ (see FIGURE 2) , $\Delta Y13 = \text{Minimum Luminance of 13 points} / \text{Maximum Luminance of 13 points}$ (see FIGURE 3).

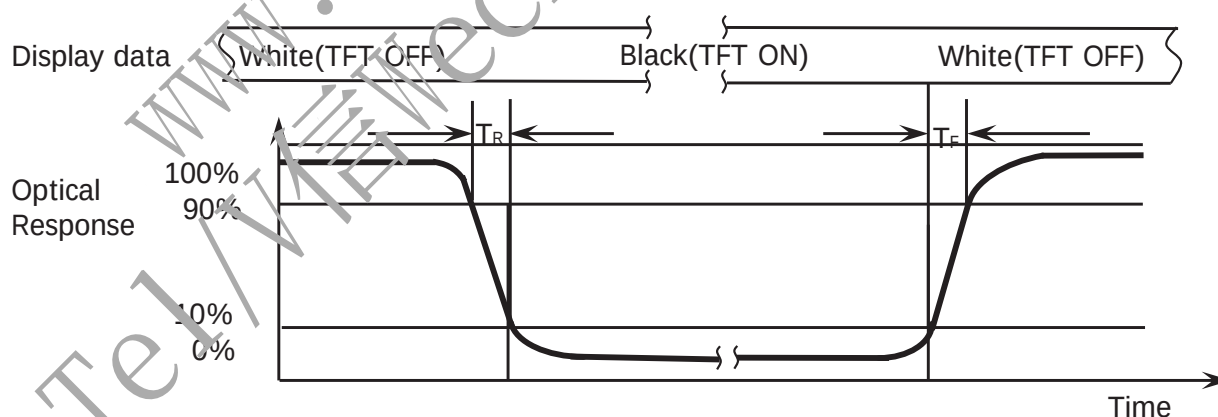Figure 4 Response Time Testing

The electro-optical response time measurements shall be made as shown in FIGURE 4 by switching the “data” input signal ON and OFF. The times needed for the luminance to change from 10% to 90% is T_d and 90% to 10% is T_r .

PRODUCT GROUP		REV	ISSUE DATE	BOE
LCM PRODUCT		P3	2017.02.09	
SPEC. NUMBER	SPEC. TITLE NV133FHM-N61 Final Product Specification			PAGE 13 OF 30

Figure 5. Cross Modulation Test Description

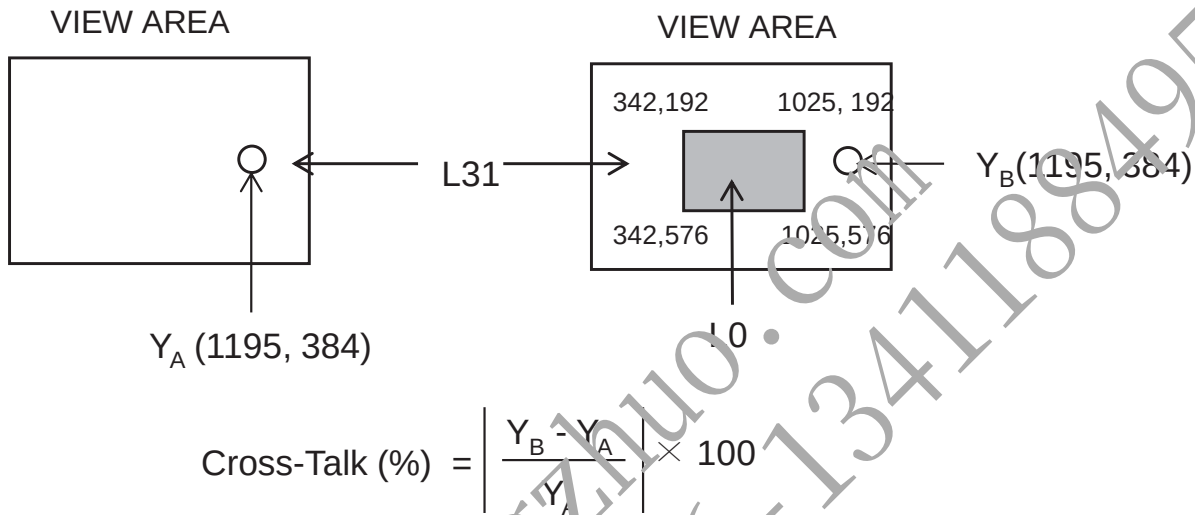

Where:

Y_A = Initial luminance of measured area (cd/m²)

Y_B = Subsequent luminance of measured area (cd/m²)

The location measured will be exactly the same in both patterns

Cross-Talk of one area of the LCD surface by another shall be measured by comparing the luminance (Y_A) of a 25mm diameter area, with all display pixels set to a gray level, to the luminance (Y_B) of that same area when any adjacent area is driven dark (Refer to FIGURE 5).

PRODUCT GROUP		REV	ISSUE DATE	BOE
LCM PRODUCT		P3	2017.02.09	
SPEC. NUMBER	SPEC. TITLE NV133FHM-N61 Final Product Specification			PAGE 14 OF 30

5.0 INTERFACE CONNECTION.

5.1 Electrical Interface Connection

The electronics interface connector is UJU IS050-L30B-C10 or Compatible.


The connector interface pin assignments are listed in Table 6.

<Table 6. Pin Assignments for the Interface Connector>

Terminal	Symbol	Functions
Pin No.	Symbol	Description
1	CABC_EN	CABC reserved
2	H-GND	Ground
3	LAN1_N	Complement Signal Link_Lane1
4	LAN1_P	True Signal Link_Lane1
5	H-GND	Ground
6	LAN0_N	Complement Signal Link_Lane0
7	LAN0_P	True Signal Link_Lane0
8	H-GND	High Speed Ground
9	AUXP	True Signal Link_Auxiliary Channel
10	AUXN	Complement Signal Link_Auxiliary Channel
11	H-GND	Ground
12	LCD_VCC	Power Supply, 3.3V (typ.)
13	LCD_VCC	Power Supply, 3.3V (typ.)
14	BIST	Panel self test enable (not active)
15	H-GND	Ground
16	H-GND	Ground
17	HPD	HPD(Hot Plug Detect) Signal Pin
18	BL_GND	High Speed Ground
19	BL_GND	High Speed Ground
20	BL_GND	High Speed Ground
21	BL_GND	High Speed Ground
22	BL_EN	Backlight on/off Control pin
23	BL_PWM	Back light PWM Dimming
24	Color Engine	Color Engine reserved
25	NC	No connection
26	BL_PWR	Backlight power
27	BL_PWR	Backlight power
28	BL_PWR	Backlight power
29	BL_PWR	Backlight power
30	Hsnyc	Hsnyc reserved

PRODUCT GROUP		REV	ISSUE DATE	BOE
LCM PRODUCT		P3	2017.02.09	
SPEC. NUMBER	SPEC. TITLE NV133FHM-N61 Final Product Specification			PAGE 15 OF 30

5-2. eDP Interface

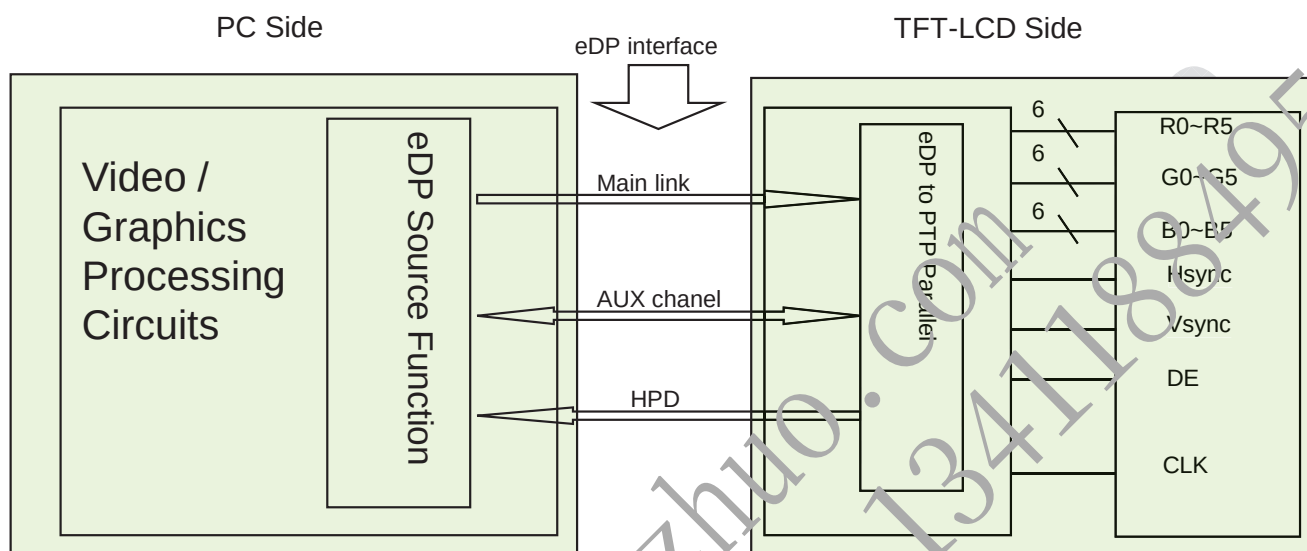

Note. Transmitter : Parade DP501 or equivalent
Transmitter is not contained in Module.

5.3.eDP Input signal

Lane 0	Lane 1
R0-5:0 G0-5:4	R1-5:0 G1-5:4
G0-3:0 B0-5:2	G1-3:0 B1-5:2
B0-1:0 R2-5:0	B1-1:0 R3-5:0
G2-5:0 B2-5:4	G3-5:0 B3-5:4
B2-3:0 R4-5:2	B3-3:0 R5-5:2
R4-1:0 G4-5:0	R5-1:0 G5-5:0
B4-5:0 R6-5:4	B5-5:0 R7-5:4
R6-3:0 G6-5:2	R7-3:0 G7-5:2
G6-1:0 B6-5:0	G7-1:0 B7-5:0

PRODUCT GROUP		REV	ISSUE DATE	BOE
LCM PRODUCT		P3	2017.02.09	
SPEC. NUMBER	SPEC. TITLE NV133FHM-N61 Final Product Specification			PAGE 16 OF 30

5.4 Back-light & LCM Interface Connection

<Table 7. Pin Assignments for the BLU & LCM Connector>

Pin No.	Symbol	Description	Pin No.	Symbol	Description
1	LED	LED cathode connection	6	NC	No Connection
2	LED	LED cathode connection	7	Vout	LED anode connection
3	LED	LED cathode connection	8	Vout	LED anode connection
4	LED	LED cathode connection	9	Vout	LED anode connection
5	NC	No Connection			

PRODUCT GROUP		REV	ISSUE DATE	BOE
LCM PRODUCT		P3	2017.02.09	
SPEC. NUMBER	SPEC. TITLE NV133FHM-N61 Final Product Specification			PAGE 17 OF 30

6.0 SIGNAL TIMING SPECIFICATION

6.1 The NV133FHM-N61 is operated by the DE only.

Item		Symbols	Min	Typ	Max	Unit
Clock	Frequency	1/Tc	101	147.8	158	MHz
Frame Period		Tv	1090	1120	1200	lines
			-	60	-	Hz
			-	16.67	-	ms
Vertical Display Period		Tvd	-	1080	-	lines
One line Scanning Period		Th	2080	2200	2400	clocks
Horizontal Display Period		Thd	-	1920	-	clocks


PRODUCT GROUP		REV	ISSUE DATE	BOE
LCM PRODUCT		P3	2017.02.09	
SPEC. NUMBER	SPEC. TITLE NV133FHM-N61 Final Product Specification			PAGE 18 OF 30

6.2 eDP Rx Interface Timing Parameter

The specification of the eDP Rx interface timing parameter is shown in Table 8.

<Table 8. eDP Rx Interface Timing Specification>

Item	Symbol	Min	Typ	Max	Unit	Remark
Spread spectrum clock	SSC		0.5		%	
Differential peak-to-peak input voltage at package pins	VRX-DIFFp-p	120	0	1200	mV	
Rx input DC common mode voltage	VRX_DC_CM	-	GND	-	V	
Differential termination resistance	RRX-DIFF	80	-	120	Ω	
Single-ended termination resistance	RRX-SE	40	-	60	Ω	
Rx short circuit current limit	IRX_SHORT	-	-	50	mA	
Intra-pair skew at Rx package pins (HBR) RX intra-pair skew tolerance at HBR	LRX_SKEW_INTRA_PAIR	-	-	60	ps	

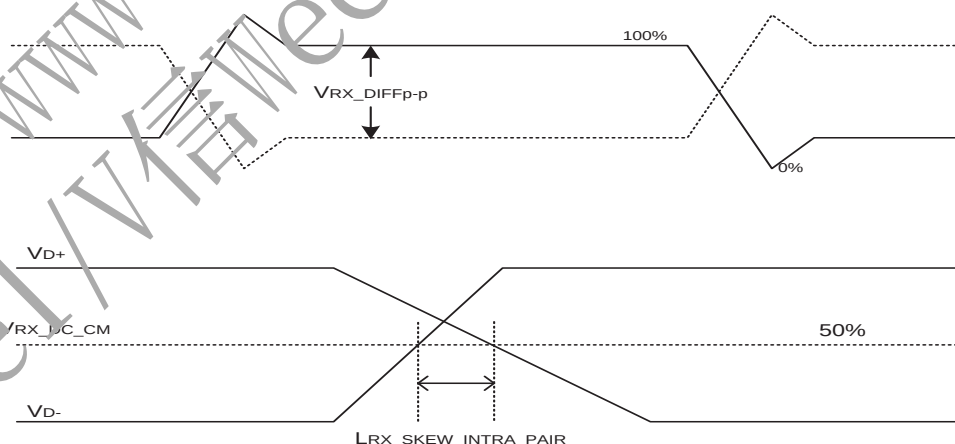

PRODUCT GROUP		REV	ISSUE DATE	BOE
LCM PRODUCT		P3	2017.02.09	
SPEC. NUMBER	SPEC. TITLE			PAGE
	NV133FHM-N61 Final Product Specification			19 OF 30


7.0 INPUT SIGNALS, BASIC DISPLAY COLORS & GRAY SCALE OF COLORS

	Colors & Gray scale	Data signal																	
		R0	R1	R2	R3	R4	R5	G0	G1	G2	G3	G4	G5	B0	B1	B2	B3	B4	B5
Basic colors	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1
	Green	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
	Light Blue	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1
	Red	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	Purple	1	1	1	1	1	1	0	0	0	0	0	0	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Gray scale of Red	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Darker	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	↑						↑						↑					
	▽	↓						↓						↓					
	Brighter	1	0	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	▽	0	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	Red	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
Gray scale of Green	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0
	Darker	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0
	△	↑						↑						↑					
	▽	↓						↓						↓					
	Brighter	0	0	0	0	0	0	1	0	1	1	1	1	0	0	0	0	0	0
	▽	0	0	0	0	0	0	0	1	1	1	1	1	0	0	0	0	0	0
	Green	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
Gray scale of Blue	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0
	Darker	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0
	△	↑						↓						↑					
	▽	↓						↓						↓					
	Brighter	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	1	1	1
	▽	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1
Gray scale of White & Black	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	1	0	0	0	0	0	1	0	0	0	0	0	1	0	0	0	0	0
	Darker	0	1	0	0	0	0	0	1	0	0	0	0	0	1	0	0	0	0
	△	↑						↑						↑					
	▽	↓						↓						↓					
	Brighter	1	0	1	1	1	1	1	0	1	1	1	1	1	0	1	1	1	1
	▽	0	1	1	1	1	1	0	1	1	1	1	1	0	1	1	1	1	1
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1

PRODUCT GROUP		REV	ISSUE DATE	BOE
LCM PRODUCT		P3	2017.02.09	
SPEC. NUMBER	SPEC. TITLE NV133FHM-N61 Final Product Specification			PAGE 20 OF 30

8.0 POWER SEQUENCE

To prevent a latch-up or DC operation of the LCD module, the power on/off sequence shall be as shown in below

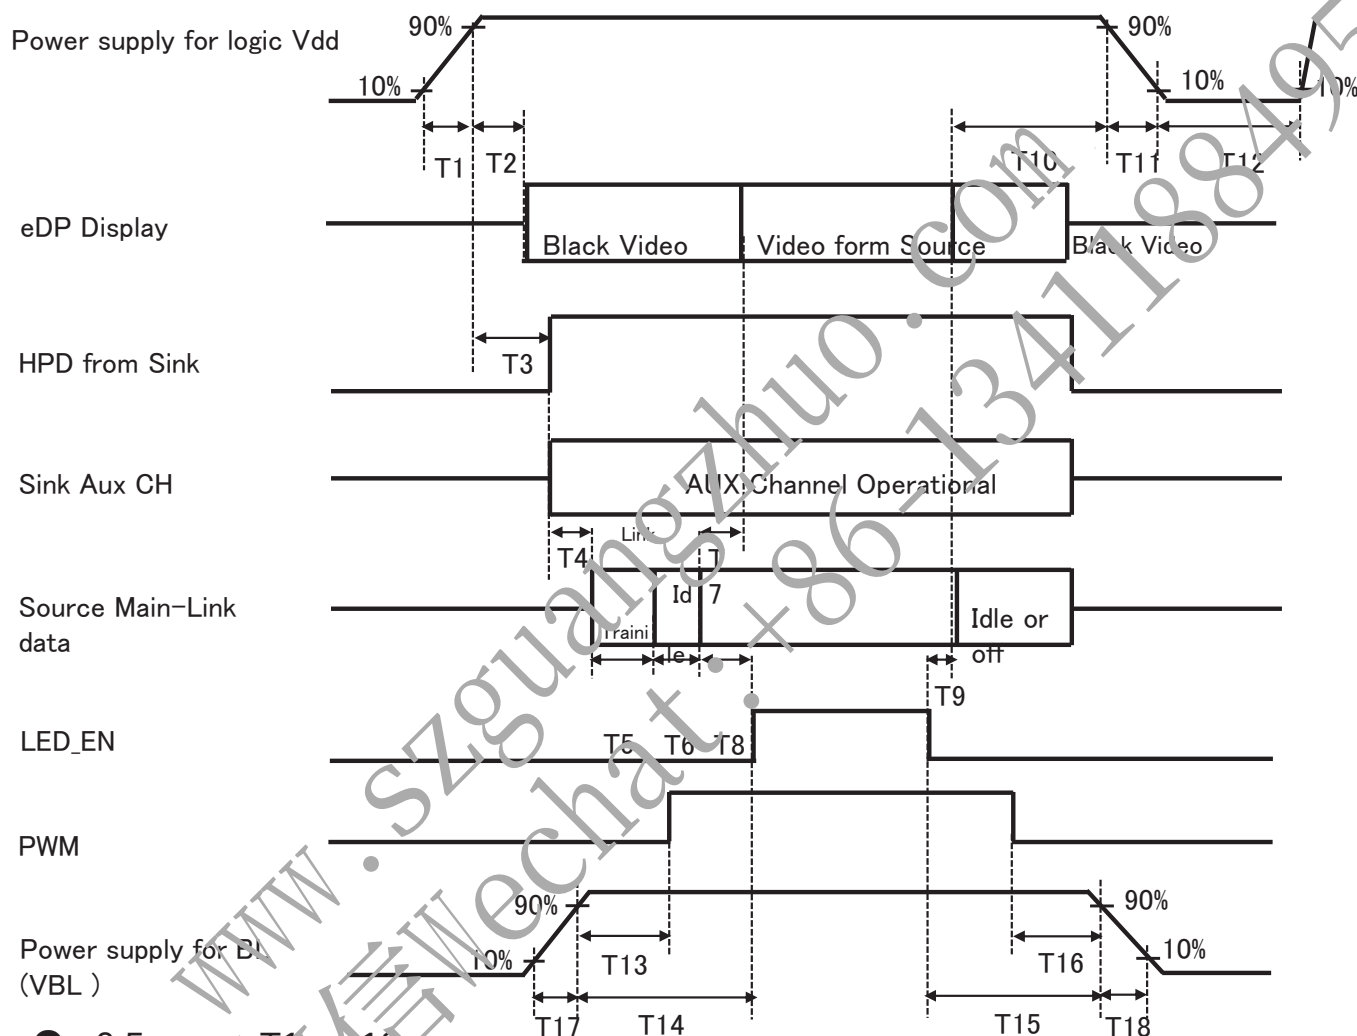

- $0.5\text{ms} \leq T1 \leq 10\text{ms}$
- $0\text{ms} \leq T2 \leq 200\text{ms}$
- $0\text{ms} \leq T3 \leq 200\text{ms}$
- $10\text{ms} \leq T13$
- $20\text{ms} \leq T14$
- $0.5\text{ms} \leq T17 \leq 20\text{ms}$
- $200\text{ms} \leq T3+T4+T5+T6+T8$

- $0\text{ms} \leq T7 \leq 50\text{ms}$
- $0\text{ms} \leq T10 \leq 500\text{ms}$
- $3\text{ms} \leq T11 \leq 10\text{ms}$
- $500\text{ms} \leq T12$
- $20\text{ms} \leq T15$
- $10\text{ms} \leq T16$
- $0.5\text{ms} \leq T18 \leq 20\text{ms}$
- $0\text{ms} \leq T9$

Notes:

- When the power supply VDD is 0V, keep the level of input signals on the low or keep high impedance.
- Do not keep the interface signal high impedance when power is on. Back Light must be turn on after power for logic and interface signal are valid.

PRODUCT GROUP		REV	ISSUE DATE	BOE
LCM PRODUCT		P3	2017.02.09	
SPEC. NUMBER	SPEC. TITLE NV133FHM-N61 Final Product Specification			PAGE 21 OF 30

9.0 RELIABILITY TEST

The Reliability test items and its conditions are shown in below.

<Table 9. Reliability test>

No	Test Items	Conditions
1	High temperature storage test	Ta = 60 °C, 240 hrs
2	Low temperature storage test	Ta = -20 °C, 240 hrs
3	High temperature & high humidity operation test	Ta = 40 °C, 90%RH, 240 hrs
4	High temperature operation test	Ta = 50 °C, 240 hrs
5	Low temperature operation test	Ta = 0 °C, 240 hrs
6	Thermal shock	Ta = -40 °C ↔ 80 °C (0.5 hr), 100 cycle
7	Drop (non-operating)	60cm/1 corner/3 edges/6 faces
8	Shock test (non-operating)	220G, Half Sine Wave 2msec ±X, ±Y, ±Z Once for each direction
9	Electro-static discharge test (non-operating)	Point : 150 pF, 330Ω, 15 KV Contact : 150 pF, 330Ω, 8 KV

11.0 HANDLING & CAUTIONS

(1) Cautions when taking out the module

- Pick the pouch only, when taking out module from a shipping package.

(2) Cautions for handling the module

- As the electrostatic discharges may break the LCD module, handle the LCD module with care. Peel a protection sheet off from the LCD panel surface as slowly as possible.
- As the LCD panel and back - light element are made from fragile glass material, impulse and pressure to the LCD module should be avoided.
- As the surface of the polarizer is very soft and easily scratched, use a soft dry cloth without chemicals for cleaning.
- Do not pull the interface connector in or out while the LCD module is operating.
- Put the module display side down on a flat horizontal plane.
- Handle connectors and cables with care.

(3) Cautions for the operation

- When the module is operating, do not lose CLK, ENAB signals. If any one of these signals is lost, the LCD panel would be damaged.
- Obey the supply voltage sequence. If wrong sequence is applied, the module would be damaged.

PRODUCT GROUP		REV	ISSUE DATE	BOE
LCM PRODUCT		P3	2017.02.09	
SPEC. NUMBER	SPEC. TITLE NV133FHM-N61 Final Product Specification			PAGE 22 OF 30

(4) Cautions for the atmosphere

- Dew drop atmosphere should be avoided.
- Do not store and/or operate the LCD module in a high temperature and/or humidity atmosphere. Storage in an electro-conductive polymer packing pouch and under relatively low temperature atmosphere is recommended.

(5) Cautions for the module characteristics


- Do not apply fixed pattern data signal to the LCD module at product aging.
- Applying fixed pattern for a long time may cause image sticking.

(6) Other cautions

- Do not disassemble and/or re-assemble LCD module.
- Do not re-adjust variable resistor or switch etc.
- When returning the module for repair or etc., Please pack the module not to be broken. We recommend to use the original shipping packages.

12.0 LABEL

(1) LCM label

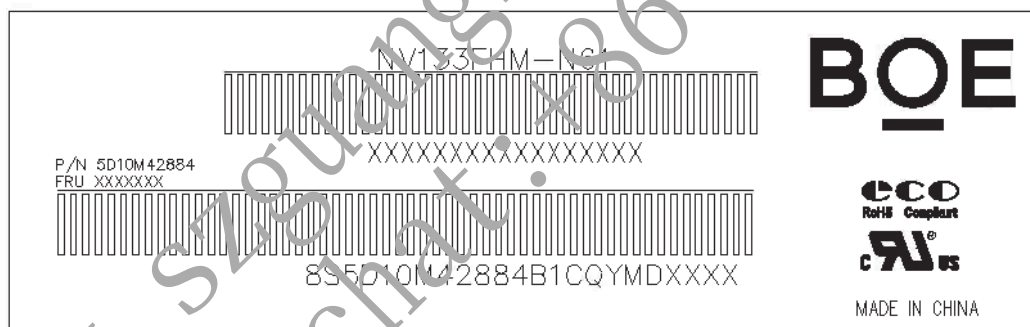

LCM ID 编码规则:

序列号	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
代码	S	L	S	T	1	2	3	5	9	4	2	0	0	0	1	D	B
描述	GBN		等级	line	年	月	FG-Code后4位					Serial Number					

客户Serial Number编码规则:

	YMD	###
Part Number	MFG Date	S/N
13 digit: num-alphabet	3 digit: Num-alphabet	4 digit: Num-alphabet
Follow Timi PN Rule MD10000004337	Skip "I,O,Q" Year=last digit of year Month=1-9 for Jan-Sept, A=Oct, B=Nov, C=Dec Day=1-9 for 1 st thru 9 th , A=10, B=11, etc. skip "I,O,Q,U"	SN:4bit, use 0~9 and A~Z numeral- alphabet, skip letter "I,O,Q,U" ; SN must NOT be duplicated.

PRODUCT GROUP		REV	ISSUE DATE	BOE
LCM PRODUCT		P3	2017.02.09	
SPEC. NUMBER	SPEC. TITLE NV133FHM-N61 Final Product Specification			PAGE 23 OF 30

(2) High voltage caution label

	HIGH VOLTAGE CAUTION	COLD CATHODE FLUORESCENT LAMP IN LCD PANEL CONTAINS A SMALL AMOUNT OF MERCURY. PLEASE FOLLOW LOCAL OR- DINANCES OR REGULATIONS FOR DISPOSAL.
	RISK OF ELECTRIC SHOCK. DISCONNECT THE ELECTRIC POWER BEFORE SERVICING	

(3) Box label

BOE		CHONGQING BOE OPTOELECTRONICS TECHNOLOGY Co., LTD	
MODEL: XXXXXXX-XXX ①	QTY: XX ②		
SERIAL NO: XXXXXXXXXXXX ③	DATE: XXXXXXXX ④		
BOX ID 条形码			
XXXXXXXXXX ⑤	XXXX ⑥	XXXX ⑦	

蓝色字体为后打印标识, 说明如下:

1. **FG-CODE**
2. **Box 产品数量**
3. **Box ID, 编码规则如下**
4. **Box Packing 日期**
5. **产品物料号(客户端)**
6. **FG-CODE 后四位**

Box ID 编码规则

序列号	1	2	3	4	5	6	7	8	9	10	11	12	13
代码	S	L	S	T	1	4	3	D	0	0	1	H	D
描述	GBN代码		等级	TM1	年份		月	Rev	Serial Number				

PRODUCT GROUP		REV	ISSUE DATE	BOE
LCM PRODUCT		P3	2017.02.09	
SPEC. NUMBER	SPEC. TITLE			PAGE
	NV133FHM-N61 Final Product Specification			24 OF 30

13.0 PACKING INFORMATION

13.1 Packing order



13.2 Notes


- Box Dimension: 12 Box/Pallet
- Package Quantity in one Box: 40pcs

PRODUCT GROUP		REV	ISSUE DATE	BOE
LCM PRODUCT		P3	2017.02.09	
SPEC. NUMBER	SPEC. TITLE			PAGE
	NV133FHM-N61 Final Product Specification			25 OF 30

14. MECHANICAL OUTLINE DIMENSION

14.1 Outline Dimension

Figure 6. Outline Dimensions (Front view)

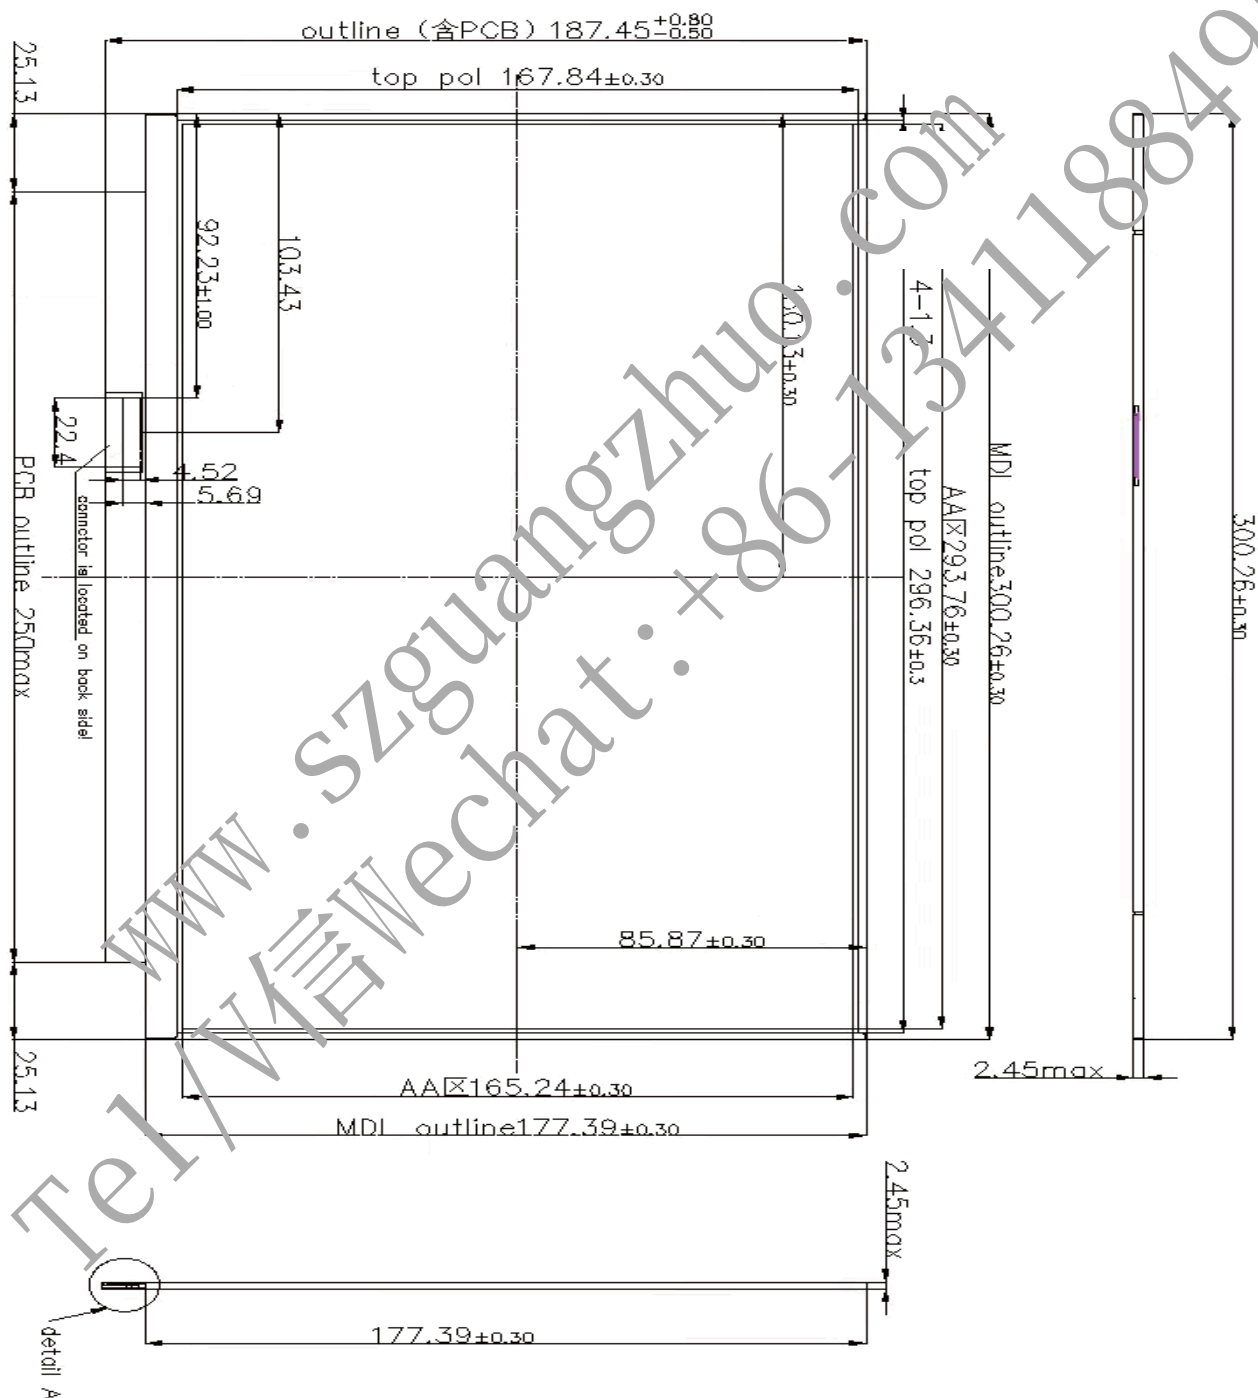

PRODUCT GROUP		REV	ISSUE DATE	BOE
LCM PRODUCT		P3	2017.02.09	
SPEC. NUMBER	SPEC. TITLE NV133FHM-N61 Final Product Specification			PAGE 27 OF 30

15.0 EDID Table

Address (HEX)		Function	Hex	Dec	Input values.	Notes
00		Header	00	0	0	EDID Header
01			FF	255	255	
02			FF	255	255	
03			FF	255	255	
04			FF	255	255	
05			FF	255	255	
06			FF	255	255	
07			00	0	0	
08		ID Manufacturer Name	09	9	BOE	ID = BOE
09			E5	229		
0A	ID Product Code	FA	250		1786	ID = 1786
0B		06	6			
0C		32-bit serial No.	00	0		
0D			00	0		
0E			00	0		
0F			00	0		
10		Week of manufacture	01	1	1	
11		Year of Manufacture	1A	26	2016	Manufactured in 2016
12		EDID Structure Ver.	01	1	1	EDID Ver 1.0
13		EDID revision #	04	4	4	EDID Rev. 0.4
14		Video input definition	A5	165	-	digital signal/DP input
15		Max H image size	1D	29	29	29 cm (Approx)
16		Max V image size	11	17	17	17 cm (Approx)
17		Display Gamma	78	120	2.2	Gamma curve = 2.2
18		Feature support	0A	10		RGB display, Preferred Timming mode
19		Red/Green low bits	11	17	-	Red / Green Low Bits
1A		Blue/White low bits	60	96	-	Blue / White Low Bits
1B		Red x high bits	A6	166	0.649	Red (x) = 10100110 (0.649)
1C		Red y high bits	58	88	0.345	Red (y) = 01011000 (0.345)
1D		Green x high bits	54	84	0.328	Green (x) = 01010100 (0.328)
1E		Green y high bits	9E	158	0.619	Green (y) = 10011110 (0.619)
1F		Blue x high bits	26	38	0.151	Blue (x) = 00100110 (0.151)
20		Blue y high bits	0F	15	0.062	Blue (y) = 00001111 (0.062)
21		White x high bits	50	80	0.313	White (x) = 01010000 (0.313)
22		White y high bits	54	84	0.329	White (y) = 01010100 (0.329)
23		Established timing 1	00	0	-	
24		Established timing 2	00	0	-	

PRODUCT GROUP		REV	ISSUE DATE	BOE
LCM PRODUCT		P3	2017.02.09	
SPEC. NUMBER	SPEC. TITLE NV133FHM-N61 Final Product Specification			PAGE 28 OF 30

25	Established timing 3	00	0	-	
26	Standard timing #1	01	1		Not Used
27		01	1		
28	Standard timing #2	01	1		Not Used
29		01	1		
2A	Standard timing #3	01	1		Not Used
2B		01	1		
2C	Standard timing #4	01	1		Not Used
2D		01	1		
2E	Standard timing #5	01	1		Not Used
2F		01	1		
30	Standard timing #6	01	1		Not Used
31		01	1		
32	Standard timing #7	01	1		Not Used
33		01	1		
34	Standard timing #8	01	1		Not Used
35		01	1		
36	Detailed timing/monitor descriptor #1	BC	188	147.8	147.8MHz Main clock
37		39	57		
38		80	128	1920	Hor Active = 1920
39		18	24	280	Hor Blanking = 280
3A		71	113	-	4 bits of Hor. Active + 4 bits of Hor. Blanking
3B		38	56	1080	Ver Active = 1080
3C		28	40	40	Ver Blanking = 40
3D		40	64	-	4 bits of Ver. Active + 4 bits of Ver. Blanking
3E		30	48	48	Hor Sync Offset = 48
3F		20	32	32	H Sync Pulse Width = 32
40		36	54	3	V sync Offset = 3 line
41		00	0	6	V Sync Pulse width : 6 line
42		26	38	294	Horizontal Image Size = 294 mm (Low 8 bits)
43		A5	165	165	Vertical Image Size = 165 mm (Low 8 bits)
44		10	16	-	4 bits of Hor Image Size + 4 bits of Ver Image Size
45		00	0	0	Hor Border (pixels)
46		00	0	0	Vertical Border (Lines)
47		1A	26		Refer to right table

PRODUCT GROUP		REV	ISSUE DATE	BOE
LCM PRODUCT		P3	2017.02.09	
SPEC. NUMBER	SPEC. TITLE NV133FHM-N61 Final Product Specification			PAGE 29 OF 30

48	Detailed timing/monitor descriptor #2	00	0		MHz Main clock
49		00	0		
4A		00	0		Hor Active =
4B		00	0		Hor Blanking =
4C		00	0		4 bits of Hor. Active + 4 bits of Hor. Blanking
4D		00	0		Ver Active = 1080
4E		00	0		Ver Blanking =
4F		00	0		4 bits of Ver. Active + 4 bits of Ver. Blanking
50		00	0		Hor Sync Offset =
51		00	0		H Sync Pulse Width =
52		00	0		V sync Offset = line
53		00	0		V Sync Pulse width : line
54		00	0		Horizontal Image Size = mm (Low 8 bits)
55		00	0		Vertical Image Size = mm (Low 8 bits)
56		00	0		4 bits of Hor Image Size + 4 bits of Ver Image Size
57		00	0		Hor Border (pixels)
58		00	0		Vertical Border (Lines)
59		1A	26		
5A	Detailed timing/monitor descriptor #3	00	0		ASCII Data Sting Tag
5B		00	0		
5C		00	0		
5D		FE	254		
5E		00	0		
5F		42	66	B	Manufacture name : BOE CQ
60		4F	79	O	
61		45	69	E	
62		20	32		
63		43	67	C	
64		51	81	Q	
65		0A	10		
66		20	32		
67		20	32		
68		20	32		
69		20	32		
6A		20	32		
6B		20	32		

PRODUCT GROUP		REV	ISSUE DATE	BOE
LCM PRODUCT		P3	2017.02.09	
SPEC. NUMBER	SPEC. TITLE NV133FHM-N61 Final Product Specification			PAGE 30 OF 30

6C	Detailed timing/monitor descriptor #4	00	0		Product Name Tag (ASCII)
6D		00	0		
6E		00	0		
6F		FE	254		
70		00	0		
71		4E	78	N	Model name : NV133FHM-N61
72		56	86	V	
73		31	49	1	
74		33	51	3	
75		33	51	3	
76		46	70	F	
77		48	72	H	
78		4D	77	M	
79		2D	45	-	
7A		4E	78	N	
7B		36	54	6	
7C		31	49	1	
7D		0A	10		
7E	Extension flag	00	0		
7F	Checksum	78	120	-	