



Product Specification

AU OPTRONICS CORPORATION

Contents

| | |
|--|-----------|
| 1. Handling Precautions | 4 |
| 2. General Description | 5 |
| 2.1 General Specification | 5 |
| 2.2 Optical Characteristics | 6 |
| 3. Functional Block Diagram | 11 |
| 4. Absolute Maximum Ratings | 12 |
| 4.1 Absolute Ratings of TFT LCD Module | 12 |
| 4.2 Absolute Ratings of Environment | 12 |
| 5. Electrical Characteristics | 13 |
| 5.1 TFT LCD Module | 13 |
| 5.2 Backlight Unit | 16 |
| 6. Signal Interface Characteristic | 17 |
| 6.1 Pixel Format Image | 17 |
| 6.2 Integration Interface Requirement | 18 |
| 6.3 Interface Timing | 21 |
| 6.4 Power ON/OFF Sequence | 22 |
| 7. Panel Reliability Test | 25 |
| 7.1 Vibration Test | 25 |
| 7.2 Shock Test | 25 |
| 7.3 Reliability Test | 25 |
| 8. Mechanical Characteristics | 26 |
| 8.1 LCM Outline Dimension | 26 |
| 9. Shipping and Package | 28 |
| 9.1 Shipping Label Format | 28 |
| 9.2 Carton Package | 28 |
| 9.3 Shipping Package of Palletizing Sequence | 28 |
| 10. Appendix: | 29 |
| 10.1 EDID Description | 29 |
| 10.2 Notes | 32 |



Product Specification

AU OPTRONICS CORPORATION

Record of Revision

| Version and Date | Page | Old description | New Description | Remark |
|------------------|-------|---|--|--------|
| 0.1 2019/03/06 | All | First Edition for Customer | | |
| 0.2 2019/04/26 | 18 | 20738-040E-02 20736-040T-01S | 20682-040E-02 20679-040T-01 | |
| 0.3 2019/05/24 | 13 | | Update Max power and current | |
| | 21 | | Update reference timing | |
| | 28 | | Update shipping and carton label | |
| | 29~31 | | Update EDID | |
| 0.4 2019/06/04 | 5 | Power Consumption: 4.05W | Power Consumption: 3.95W | |
| | 13 | VDD power: 1.55 Typ, 2.28 Max IDD.current: 760mA | VDD power: 1.35 Typ, 2.25 Max. IDD.current: 750mA | |
| | 16 | BLU power: 2.5W | BLU power: 2.6W | |
| | 21 | | Update frame rate min. 60Hz | |
| | 29~31 | | Update EDID | |
| | 32 | | PSRRS off, PSR1 off, PSR2 off | |
| 0.5 2019/07/23 | 6 | | Update color coordinates | |
| 0.6 2019/08/01 | | | Revise timing characteristics | |
| 1.0 2019/10/31 | | Final Edition for Customer | | |



Product Specification

AU OPTRONICS CORPORATION

1. Handling Precautions

- 1) Since front polarizer is easily damaged, pay attention not to scratch it.
- 2) Be sure to turn off power supply when inserting or disconnecting from input connector.
- 3) Wipe off water drop immediately. Long contact with water may cause discoloration or spots.
- 4) When the panel surface is soiled, wipe it with absorbent cotton or other soft cloth.
- 5) Since the panel is made of glass, it may break or crack if dropped or bumped on hard surface.
- 6) Since CMOS LSI is used in this module, take care of static electricity and insure human earth when handling.
- 7) Do not open nor modify the Module Assembly.
- 8) Do not press the reflector sheet at the back of the module to any directions.
- 9) At the insertion or removal of the Signal Interface Connector, be sure not to rotate nor tilt the Interface Connector of the TFT Module.
- 10) After installation of the TFT Module into an enclosure (Notebook PC Bezel, for example), do not twist nor bend the TFT Module even momentarily. At designing the enclosure, it should be taken into consideration that no bending/twisting forces are applied to the TFT Module from outside. Otherwise the TFT Module may be damaged.
- 11) Small amount of materials having no flammability grade is used in the LCD module. The LCD module should be supplied by power complied with requirements of Limited Power Source (IEC60950 or UL1950), or be applied exemption.
- 12) Disconnecting power supply before handling LCD modules, it can prevent electric shock, DO NOT TOUCH the electrode parts, cables, connectors and LED circuit part of TFT module that a LED light bar build in as a light source of back light unit. It can prevent electrostatic breakdown.



Product Specification

AU OPTRONICS CORPORATION

2. General Description

B173HAN05.0 is a Color Active Matrix Liquid Crystal Display composed of a TFT LCD panel, a driver circuit, and LED backlight system. The screen format is intended to support the 16:9 FHD, 1920(H) x 1080(V) screen and 16.7M colors (RGB 8-bits data driver) with LED backlight driving circuit. All input signals are eDP interface compatible.

B173HAN05.0 is designed for a display unit of notebook style personal computer and industrial machine.

2.1 General Specification

The following items are characteristics summary on the table at 25 °C condition:

| Items | Unit | Specifications | | | |
|--|----------------------|---|--------|--------|--------|
| Screen Diagonal | [mm] | 17.3"(17.26) | | | |
| Active Area | [mm] | 381.888 x 214.812 | | | |
| Pixels H x V | | 1920 x 3 (RGB) x 1080 | | | |
| Pixel Pitch | [mm] | 0.1989 x 0.1989 | | | |
| Pixel Format | | R.G.B. Vertical Stripe | | | |
| Display Mode | | Normally Black | | | |
| White Luminance (ILED=12mA) (Note: ILED is LED current) | [cd/m ²] | 300 typ. (5 points average) 255 min. (5 points average) | | | |
| Luminance Uniformity | | 1.25 max. (5 points) | | | |
| Contrast Ratio | | 1000 typ | | | |
| Response Time | [ms] | T _r +T _f 8 typ. OD GTG 3 typ. | | | |
| Nominal Input Voltage (DD) | [Vdc] | +3.3V min | | | |
| Power Consumption | [Watt] | 3.95W Max (without OD) (Max: includ Logic@mosaic & BL power) | | | |
| Weight | [Grams] | 510g max | | | |
| Physical Size | [mm] | | Min. | Typ. | Max. |
| | | Length | 389.59 | 389.89 | 390.19 |
| | | Width | 226.71 | 227.01 | 227.31 |
| | | Thickness | - | - | 3.5 |
| Electrical Interface | | 4 Lane eDP1.4 | | | |
| Glass Thickness | [mm] | 0.4 | | | |
| Surface Treatment | | Anti-Glare, Hardness 3H | | | |
| Support Color | | 16.7M colors (RGB 8-bit) | | | |
| Temperature Range | | | | | |
| Operating | [°C] | 0 to +50 | | | |
| Storage (Non-Operating) | [°C] | -20 to +60 | | | |
| RoHS Compliance | | RoHS Compliance | | | |



Product Specification

AU OPTRONICS CORPORATION

2.2 Optical Characteristics

The optical characteristics are measured under stable conditions at 25°C (Room Temperature) :


| Item | Symbol | Conditions | Min. | Typ. | Max. | Unit | Note |
|---|------------------------|--------------------------------------|-------|-------|-------|-------------------|---------|
| White Luminance I _{LED} = 12mA (Base Panel Only) | | 5 points average | 255 | 300 | - | cd/m ² | 1, 4, 5 |
| Viewing Angle | θ_R | Horizontal (Right) CR = 10 (Left) | 80 | 85 | - | degree | 4, 9 |
| | θ_L | | 80 | 85 | | | |
| | ϕ_H | Vertical (Upper) CR = 10 (Lower) | 80 | 85 | - | | |
| | ϕ_L | | 80 | 85 | | | |
| Luminance Uniformity | δ_{5P} | 5 Points | - | - | 1.25 | | 1, 3, 4 |
| Luminance Uniformity | δ_{13P} | 13 Points | - | - | 1.6 | | 2, 3, 4 |
| Contrast Ratio | CR | | 700 | 1000 | - | | 4, 6 |
| Cross talk | % | | | | 4 | | 4, 7 |
| Response Time | T _{RT} | Rising + Falling | - | 8 | - | msec | 4, 8 |
| Response Time | T _{G To G} | | | 5 | | msec | 8 |
| Response Time | T _{OD G To G} | | | 3 | | msec | 8 |
| Color / Chromaticity Coordinates | White | W _x | 0.283 | 0.313 | 0.343 | CIE 1931 | 4 |
| | | W _y | 0.299 | 0.329 | 0.359 | | |
| | Red | R _x | 0.620 | 0.650 | 0.680 | | |
| | | R _y | 0.296 | 0.326 | 0.356 | | |
| | Green | G _x | 0.259 | 0.289 | 0.319 | | |
| | | G _y | 0.582 | 0.612 | 0.642 | | |
| | Blue | B _x | 0.122 | 0.152 | 0.182 | | |
| | | B _y | 0.035 | 0.065 | 0.095 | | |
| sRGB | % | | - | 100 | - | | |




Product Specification

AU OPTRONICS CORPORATION

Note 1: 5 points position (Ref: Active area)

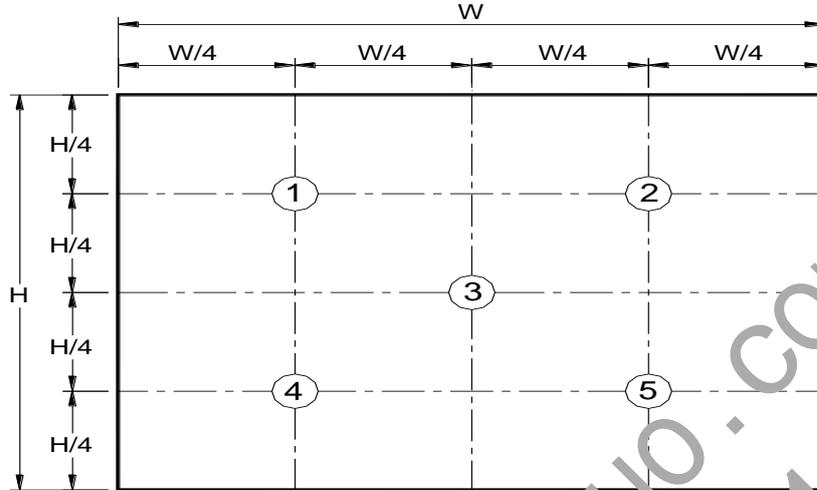

Note 2: 13 points position (Ref: Active area)

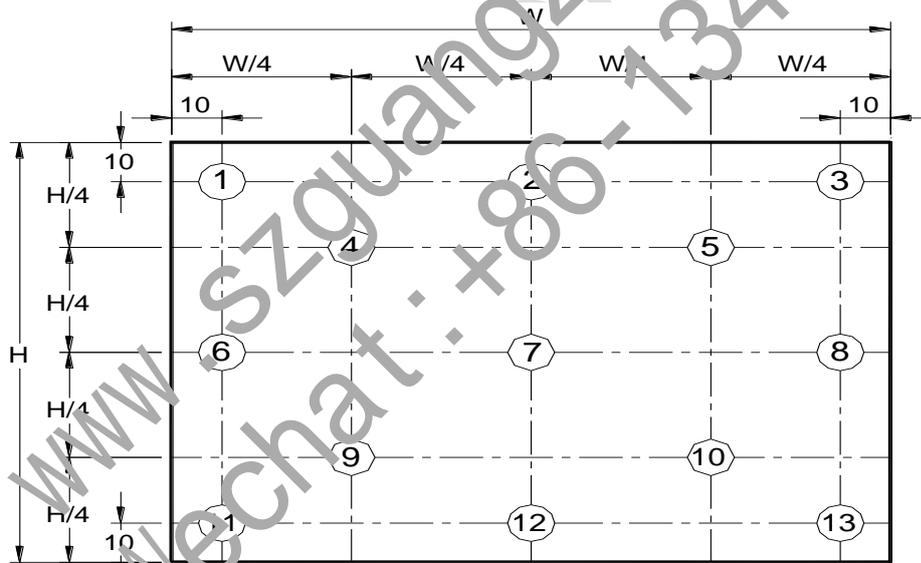

Note 3: The luminance uniformity of 5 or 13 points is defined by dividing the maximum luminance values by the minimum test point luminance.

$$\delta_{w5} = \frac{\text{Maximum Brightness of five points}}{\text{Minimum Brightness of five points}}$$

$$\delta_{w13} = \frac{\text{Maximum Brightness of thirteen points}}{\text{Minimum Brightness of thirteen points}}$$

Note 4: Measurement method


The LCD module should be stabilized at given temperature for 30 minutes to avoid abrupt temperature change during measuring. In order to stabilize the luminance, the measurement should be executed after lighting



Product Specification

AU OPTRONICS CORPORATION

Backlight for 30 minutes in a stable, windless and dark room, and it should be measured in the center of screen.

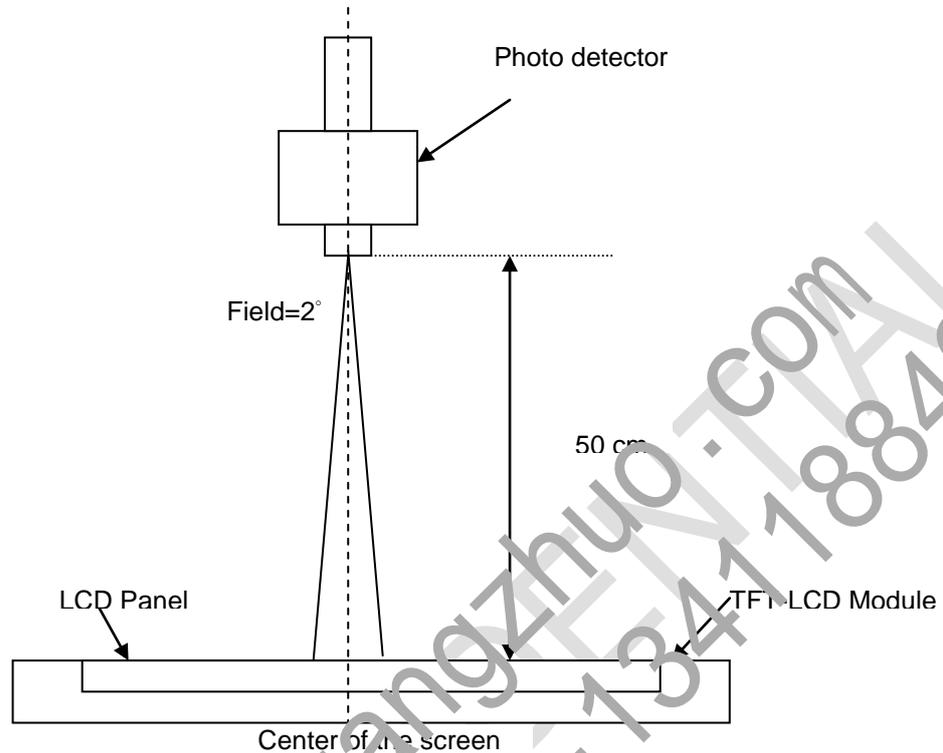

Note 5 : Definition of Average Luminance of White (Y_L):

Measure the luminance of gray level 63 at 5 points, $Y_L = [L(1) + L(2) + L(3) + L(4) + L(5)] / 5$

$L(x)$ is corresponding to the luminance of the point X at Figure in Note (1).

Note 6 : Definition of contrast ratio:

Contrast ratio is calculated with the following formula.

$$\text{Contrast ratio (CR)} = \frac{\text{Brightness on the "White" state}}{\text{Brightness on the "Black" state}}$$

Note 7 : Definition of Cross talk (CT)

$$CT = |Y_B - Y_A| / Y_A \times 100 (\%)$$

Where


Y_A = Luminance of measured location without gray level 0 pattern (cd/m^2)

Y_B = Luminance of measured location with gray level 0 pattern (cd/m^2)




Product Specification

AU OPTRONICS CORPORATION

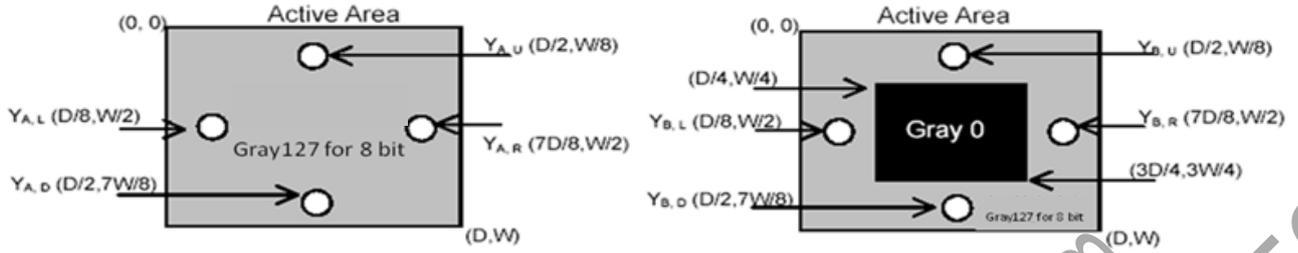

Note 8 : Definition of response time:

The output signals of BM-7 or equivalent are measured when the input signals are changed from "Black" to "White" (falling time) and from "White" to "Black" (rising time), respectively. The response time interval between the 10% and 90% of amplitudes. Refer to figure as below.

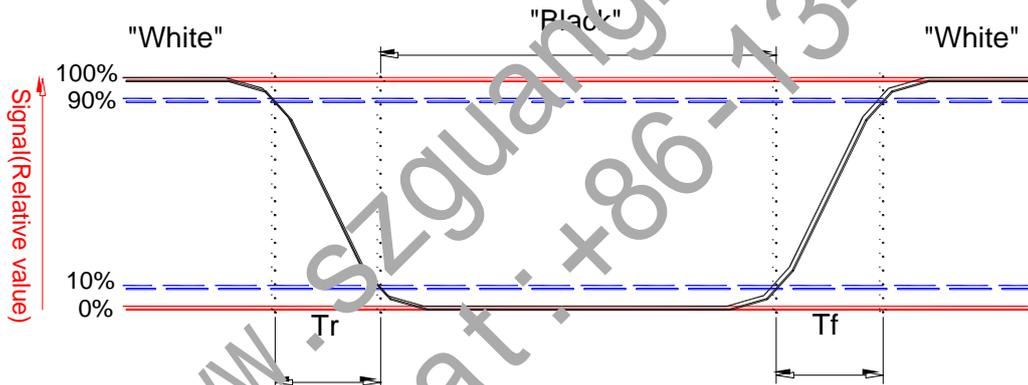

The gray to gray response time is defined as the following table.

| Gray Level to Gray Level | Target gray level | | | | |
|--------------------------|-------------------|-----|------|------|------|
| | L0 | L63 | L127 | L191 | L255 |
| L0 | | | | | |
| L63 | | | | | |
| L127 | | | | | |
| L191 | | | | | |
| L255 | | | | | |

T_{GTG_typ} is the total average time at rising time and falling time of gray to gray.




Product Specification

AU OPTRONICS CORPORATION

Note 9 : Definition of viewing angle

Viewing angle is the measurement of contrast ratio ≥ 10 , at the screen center, over a 180° horizontal and 180° vertical range (off-normal viewing angles). The 180° viewing angle range is broken down as follows; 90° (θ) horizontal left and right and 90° (Φ) vertical, high (up) and low (down). The measurement direction is typically perpendicular to the display surface with the screen rotated about its center to develop the desired measurement viewing angle.

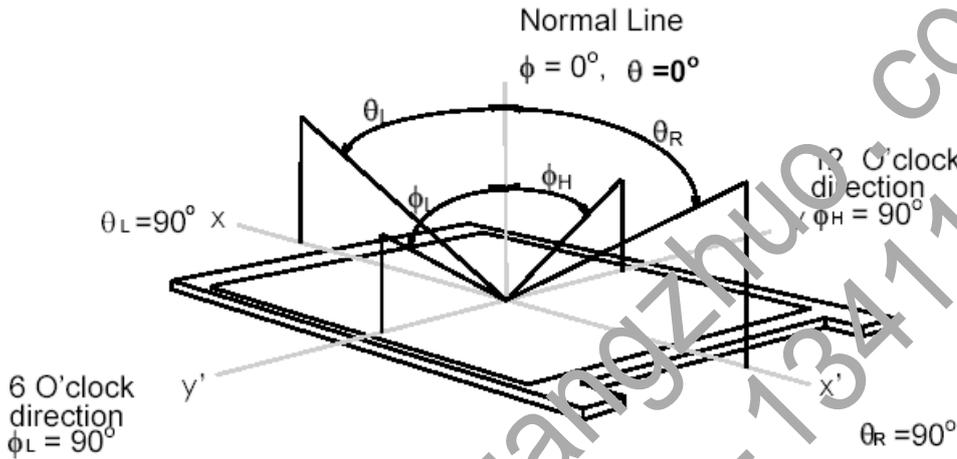




Product Specification

AU OPTRONICS CORPORATION

3. Functional Block Diagram

The following diagram shows the functional block of the 17.3 inches wide Color TFT/LCD 40 Pin

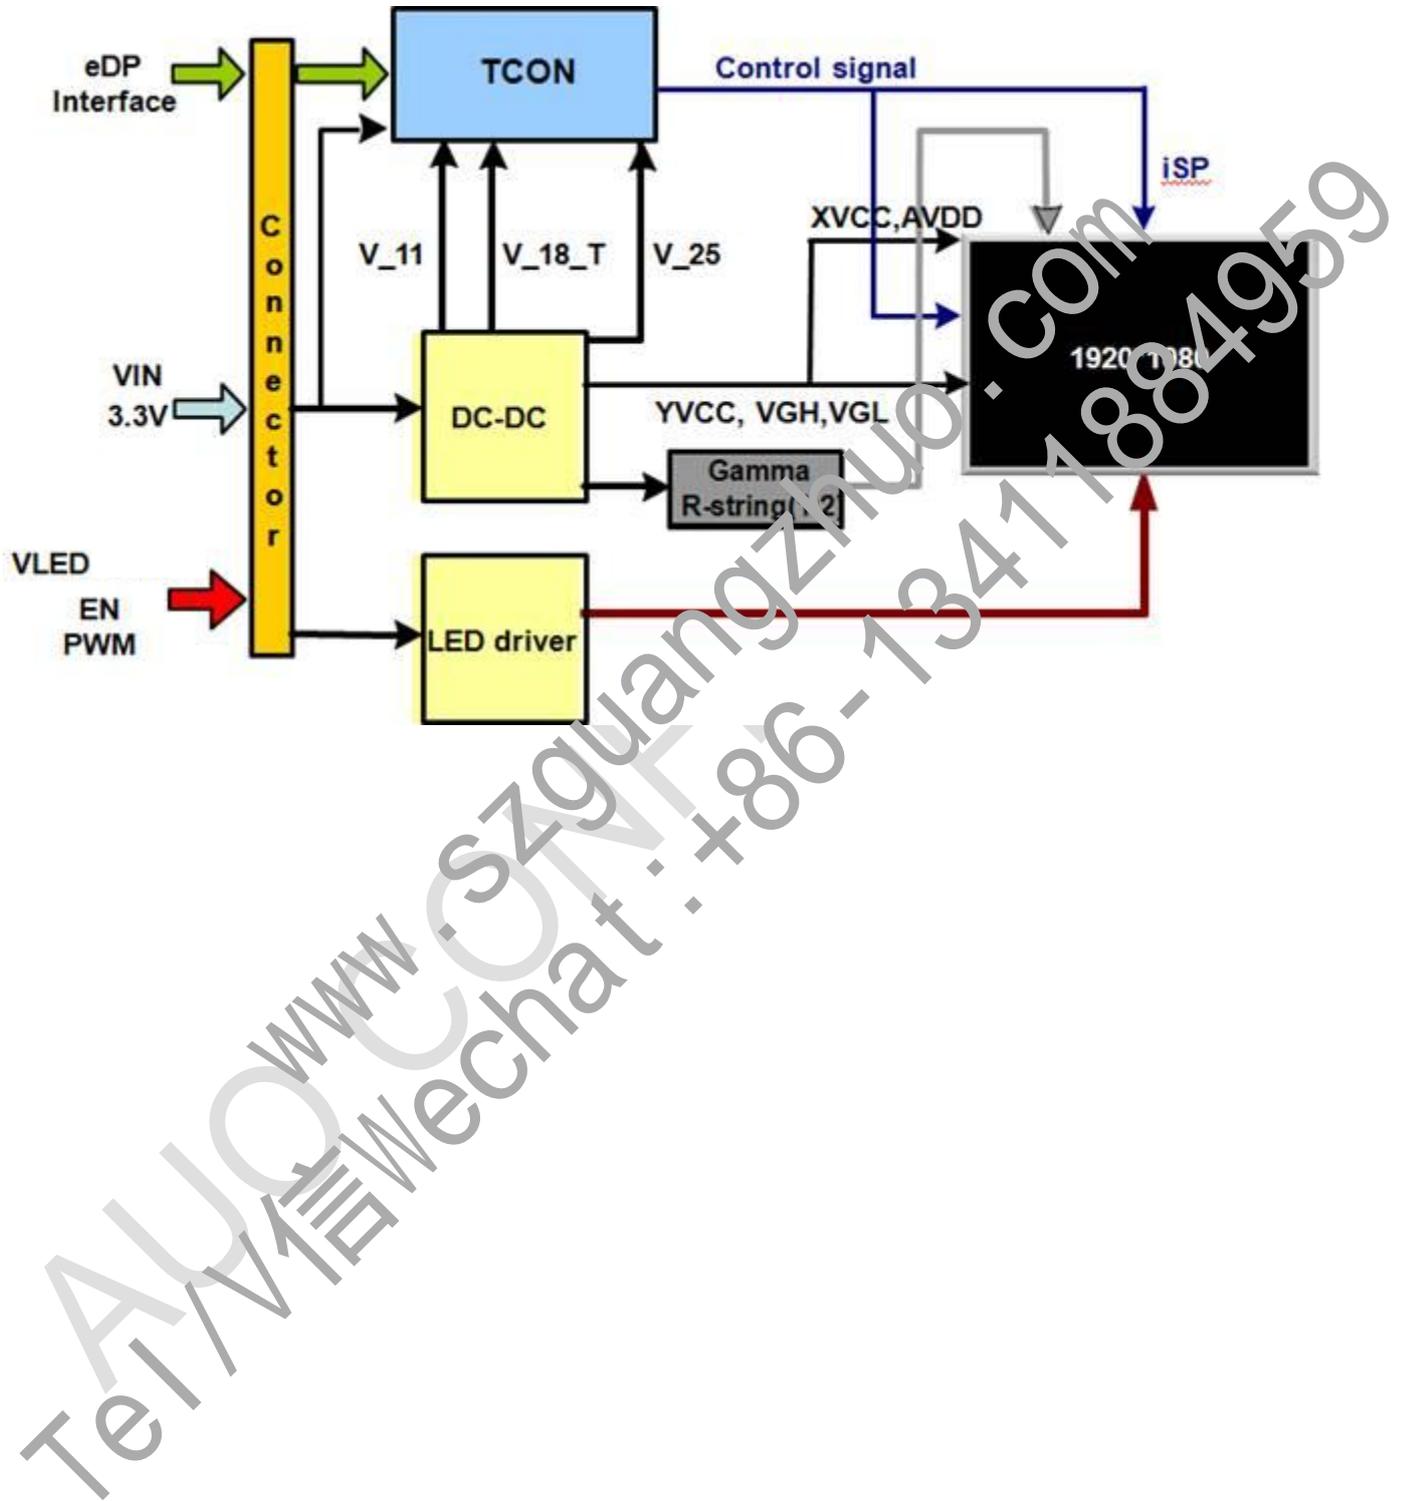



Product Specification

AU OPTRONICS CORPORATION

4. Absolute Maximum Ratings

An absolute maximum rating of the module is as following:

4.1 Absolute Ratings of TFT LCD Module

| Item | Symbol | Min | Max | Unit | Conditions |
|-------------------------|--------|------|------|--------|------------|
| Logic/LCD Drive Voltage | Vin | -0.3 | +4.0 | [Volt] | Note 1,2 |

4.2 Absolute Ratings of Environment


| Item | Symbol | Min | Max | Unit | Conditions |
|-----------------------|--------|-----|-----|-------|------------|
| Operating Temperature | TOP | 0 | +50 | [°C] | Note 4 |
| Operation Humidity | HOP | 5 | 95 | [%RH] | Note 4 |
| Storage Temperature | TST | -20 | +60 | [°C] | Note 4 |
| Storage Humidity | HST | 10 | 90 | [%RH] | Note 4 |

Note 1: At Ta (25°C)

Note 2: Permanent damage to the device may occur if exceed maximum values

Note 3: LED specification refer to section 5.2

Note 4: For quality performance, please refer to AUO IIS (Incoming Inspection Standard).

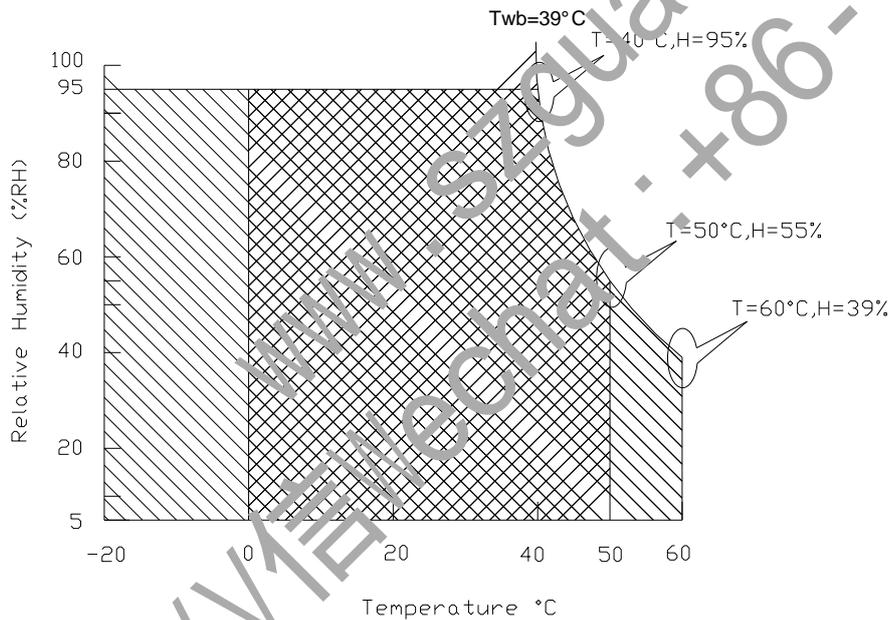



Product Specification

AU OPTRONICS CORPORATION

5. Electrical Characteristics

5.1 TFT LCD Module

5.1.1 Power Specification

Input power specifications are as follows;



The power specification are measured under 25°C and frame frequency under 240Hz

| Symble | Parameter | Min | Typ | Max | Units | Note |
|--------|--|-----|------|------|----------|--------|
| VDD | Logic/LCD Drive Voltage | 3.0 | - | 3.6 | [Volt] | |
| PDD | VDD Power | - | 1.35 | 2.25 | [Watt] | Note 1 |
| IDD | IDD Current | - | - | 750 | [mA] | Note 1 |
| IRush | Inrush Current | - | - | 2000 | [mA] | Note 2 |
| VDDrp | Allowable Logic/LCD Drive Ripple Voltage | - | - | 100 | [mV] p-p | |

Note 1 : PDD(typ)@ mosaic pattern Maximum Power ; PDD(Max)@ R/G/B pattern Maximum Power with OD

$$IDD(Max)=PDD(Max) / VDD(Min)$$

Note 2 : Measure Condition

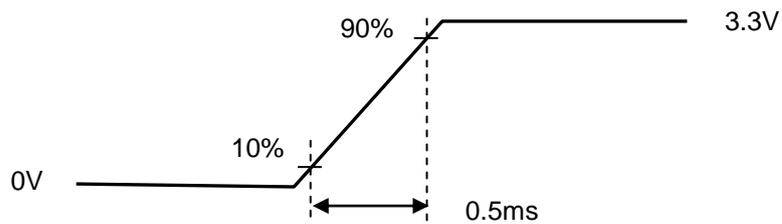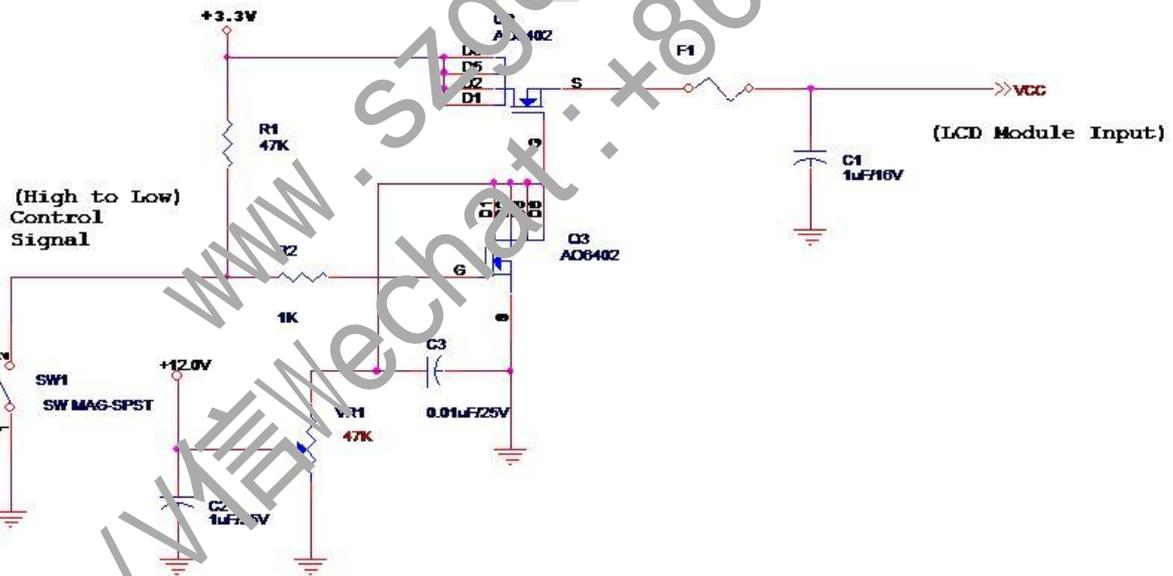

Vin rising time



Product Specification

AU OPTRONICS CORPORATION

5.1.2 Signal Electrical Characteristics


Signal electrical characteristics are as follows;

Display Port main link signal:

Differential pair VD+ , VD-
Which is one Display port
Main link

VCM of Display port
Main link

$$V_{diffP-P} = [(VD+) - (VD-)] \times 2$$

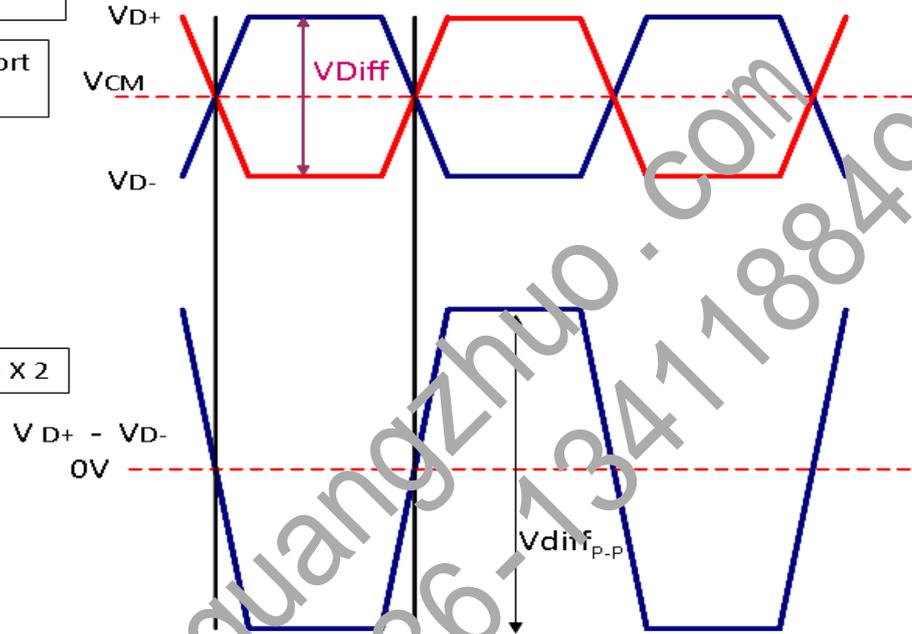

| Display port main link | | | | | |
|------------------------|--|-----|-----|------|------|
| | | Min | Typ | Max | unit |
| VCM | RX input DC Common Mode Voltage | | 0 | | V |
| VDiff _{P-P} | Peak-to-peak Voltage at a receiving Device | 75 | | 1320 | mV |


Follow as VESA display port standard [V1.4](#)



Product Specification

AU OPTRONICS CORPORATION

Display Port AUX_CH signal:

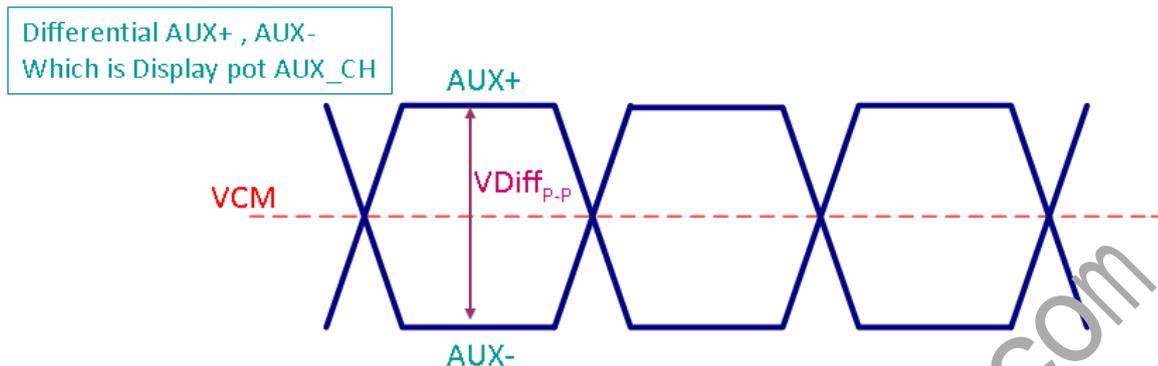

| Display port AUX_CH | | | | | |
|----------------------|--|-----|-----|-----|------|
| | | Min | Typ | Max | unit |
| VCM | AUX DC Common Mode Voltage | | 0 | | V |
| VDiff _{P-P} | AUX Peak-to-peak Voltage at a receiving Device | 270 | | 800 | V |

Follow as VESA display port standard V1.3

Display Port VHPD signal:

| Display port VHPD | | | | | |
|-------------------|-------------|------|-----|-----|------|
| | | Min | Typ | Max | unit |
| VHPD | HPD Voltage | 2.25 | -- | 3.6 | V |

Follow as VESA display port standard V1.3



Product Specification

AU OPTRONICS CORPORATION

5.2 Backlight Unit

5.2.1 LED characteristics

| Parameter | Symbol | Min | Typ | Max | Units | Condition |
|-----------------------------|--------|--------|-----|-----|--------|--------------------------------|
| Backlight Power Consumption | PLED | - | - | 2.6 | [Watt] | (Ta=25°C), Note 1 Vin =12V |
| LED Life-Time | N/A | 15,000 | - | - | Hour | (Ta=25°C), Note 2 If= 2.0mA |

Note 1: Calculator value for reference $P_{LED} = V_F$ (Normal Distribution) * I_F (Normal Distribution) / Efficiency

Note 2: The LED life-time define as the estimated time to 50% degradation of initial luminous.

5.2.2 Backlight input signal characteristics

| Parameter | Symbol | Min | Typ | Max | Units | Remark |
|-----------------------------|------------------|-----|------|------|--------|--|
| LED Power Supply | VLED (Note 1) | 6 | 12.0 | 21.0 | [Volt] | Define as Connector Interface (Ta=25°C) |
| LED Enable Input High Level | VLED_EN | 3.0 | -- | 3.6 | [Volt] | |
| LED Enable Input Low Level | | -- | -- | 0.5 | [Volt] | |
| PWM Logic Input High Level | VPWM_EN | 3.0 | -- | 3.6 | [Volt] | |
| PWM Logic Input Low Level | | -- | -- | 0.5 | [Volt] | |
| PWM Input Frequency | FPWM | 200 | 1K | 10K | Hz | |
| PWM Duty Ratio | Duty | 5 | -- | 100 | % | |

Note 1 : Recommend system pull up/down resistor no bigger than 10kohm




Product Specification

AU OPTRONICS CORPORATION

6. Signal Interface Characteristic

6.1 Pixel Format Image

Following figure shows the relationship of the input signals and LCD pixel format.

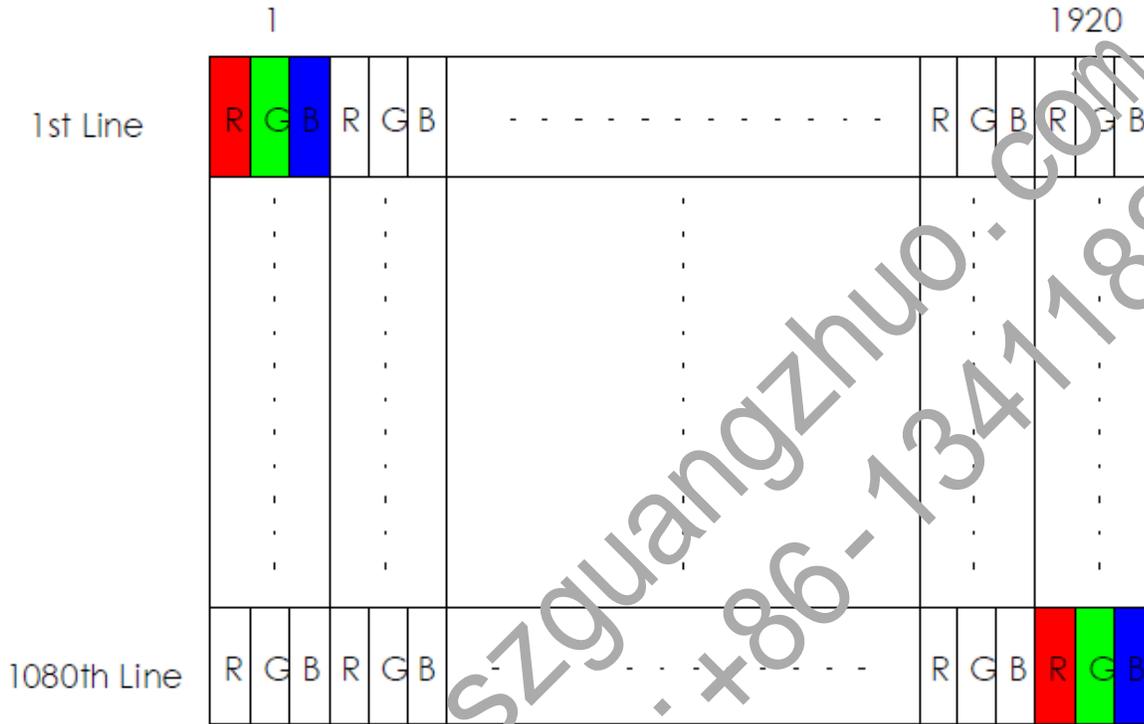



Product Specification

AU OPTRONICS CORPORATION

6.2 Integration Interface Requirement

6.2.1 Connector Description

Physical interface is described as for the connector on module.

These connectors are capable of accommodating the following signals and will be following components.

| Connector Name / Designation | For Signal Connector |
|------------------------------|-----------------------------|
| Manufacturer | IPEX |
| Type / Part Number | 20682-040E-02 or compatible |
| Mating Housing/Part Number | 20679-040T-01 or compatible |

6.2.2 Pin Assignment (4 Lane)

eDP lane is a differential signal technology for LCD interface and high speed data transfer device.

| PIN No | Symbol | Function |
|--------|-----------|----------------------------|
| 1 | DCR or NC | NC |
| 2 | H_GND | High Speed Ground |
| 3 | Lane3_N | Comp Signal Lane3 |
| 4 | Lane3_P | True Signal Link Lane 3 |
| 5 | H_GND | High Speed Ground |
| 6 | Lane2_N | Comp Signal Link Lane 2 |
| 7 | Lane2_P | True Signal Link Lane 2 |
| 8 | H_GND | High Speed Ground |
| 9 | Lane1_N | Comp Signal Lane 1 |
| 10 | Lane1_P | True Signal Link Lane 1 |
| 11 | H_GND | High Speed Ground |
| 12 | Lane0_N | Comp Signal Link Lane 0 |
| 13 | Lane0_P | True Signal Link Lane 0 |
| 14 | H_GND | High Speed Ground |
| 15 | AUX_CH_P | True Signal Auxiliary Ch. |
| 16 | AUX_CH_N | Comp Signal Auxiliary Ch. |
| 17 | H_GND | High Speed Ground |
| 18 | LCD_VCC | LCD logic and driver power |



Product Specification


AU OPTRONICS CORPORATION

| | | |
|----|---------------------|---|
| 19 | LCD_VCC | LCD logic and driver power |
| 20 | LCD_VCC | LCD logic and driver power |
| 21 | LCD_VCC | LCD logic and driver power |
| 22 | LCD_Self_Test or NC | LCD Panel Self Test Enable (Optional) |
| 23 | LCD GND | LCD logic and driver ground |
| 24 | LCD GND | LCD logic and driver ground |
| 25 | LCD GND | LCD logic and driver ground |
| 26 | LCD GND | LCD logic and driver ground |
| 27 | HPD | HPD signal pin |
| 28 | BL_GND | Backlight_ground |
| 29 | BL_GND | Backlight_ground |
| 30 | BL_GND | Backlight_ground |
| 31 | BL_GND | Backlight_ground |
| 32 | BL_Enable | Backlight On / Off |
| 33 | BL PWM DIM | System PWM signal Input |
| 34 | NC | NC |
| 35 | NC | NC |
| 36 | BL_PWR | Backlight power (6V~21V) |
| 37 | BL_PWR | Backlight power (6V~21V) |
| 38 | BL_PWR | Backlight power (6V~21V) |
| 39 | BL_PWR | Backlight power (6V~21V) |
| 40 | OD or NC | OD function default off which can be enable by pull low |




Product Specification

AU OPTRONICS CORPORATION

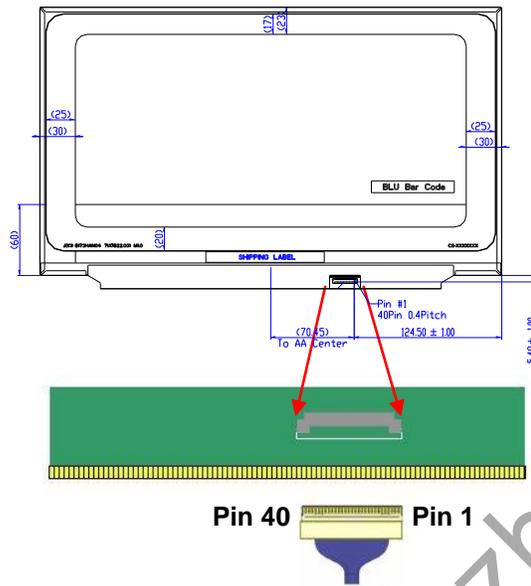

Note1: Start from right side.

Note2: Input signals shall be low or High-impedance state when VDD is off.
Internal circuit of **eDP inputs** are as following.

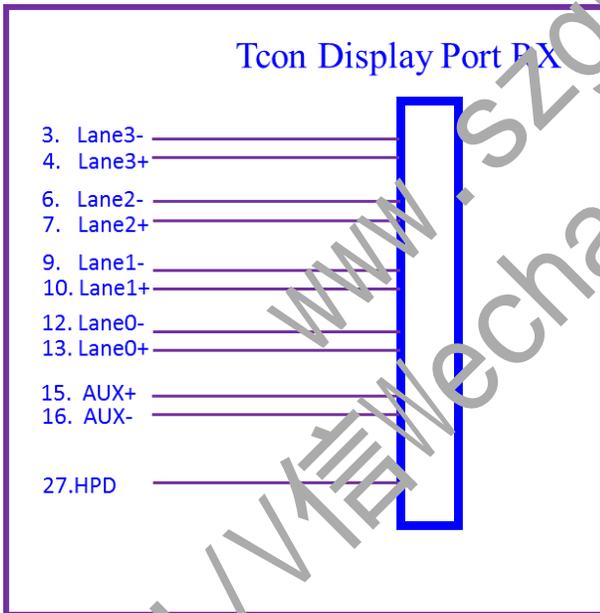



Product Specification

AU OPTRONICS CORPORATION

6.3 Interface Timing

6.3.1 Timing Characteristics

Basically, interface timings should match the 1920x1080 / 240Hz manufacturing guide line timing.

| Parameter | Symbol | Min. | Typ. | Max. | Unit | |
|--------------------|-----------------------|-----------------|------|--------|------|--------------------|
| Frame Rate | - | 60 | - | 240 | Hz | |
| Clock frequency | 1/ T _{clock} | 533.28 | - | 533.28 | MHz | |
| Vertical Section | Period | T _V | 1111 | - | 4440 | T _{Line} |
| | Active | T _{VD} | 1080 | | | |
| | Blanking | T _{VB} | 31 | - | 360 | |
| Horizontal Section | Period | T _H | 2000 | - | 2000 | T _{clock} |
| | Active | T _{HD} | 1920 | | | |
| | Blanking | T _{HB} | 80 | - | 80 | |

Note 1 : The above is as optimized setting




Product Specification

AU OPTRONICS CORPORATION

6.4 Power ON/OFF Sequence


Power on/off sequence is as follows. Interface signals and LED on/off sequence are also shown in the chart. Signals from any system shall be Hi-Z state or low level when VDD is off

Display Port panel power sequence:

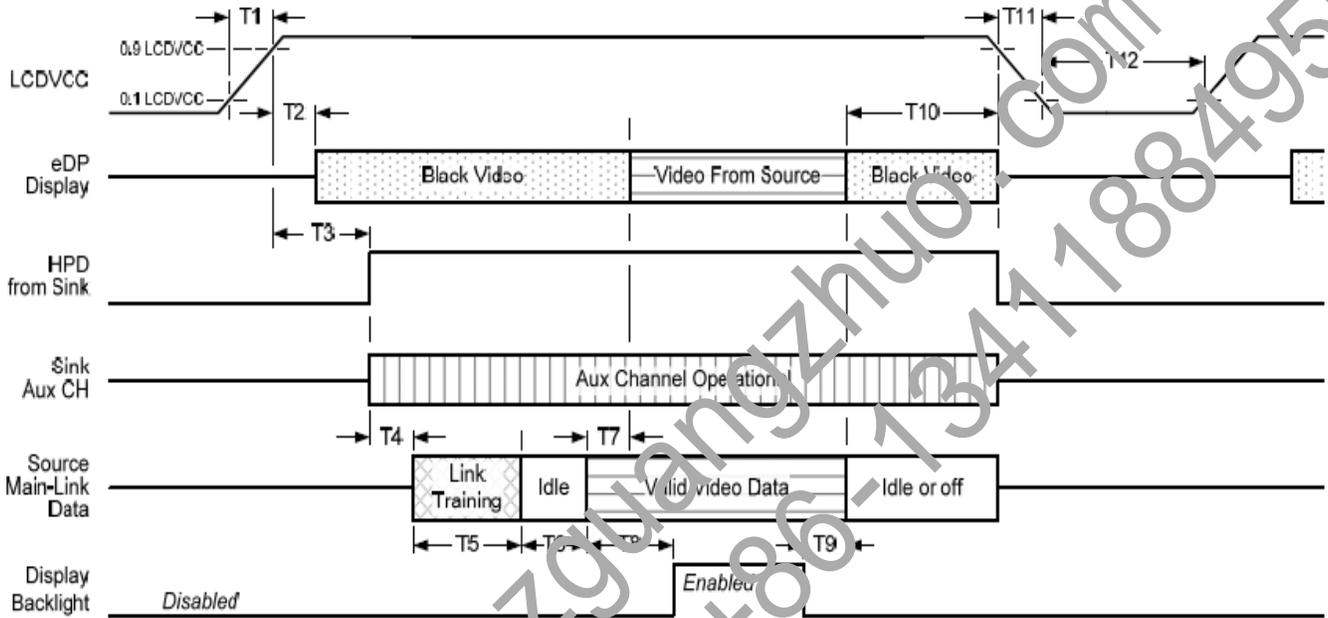

Display port interface power up/down sequence, normal system operation

Display Port AUX_CH transaction only:

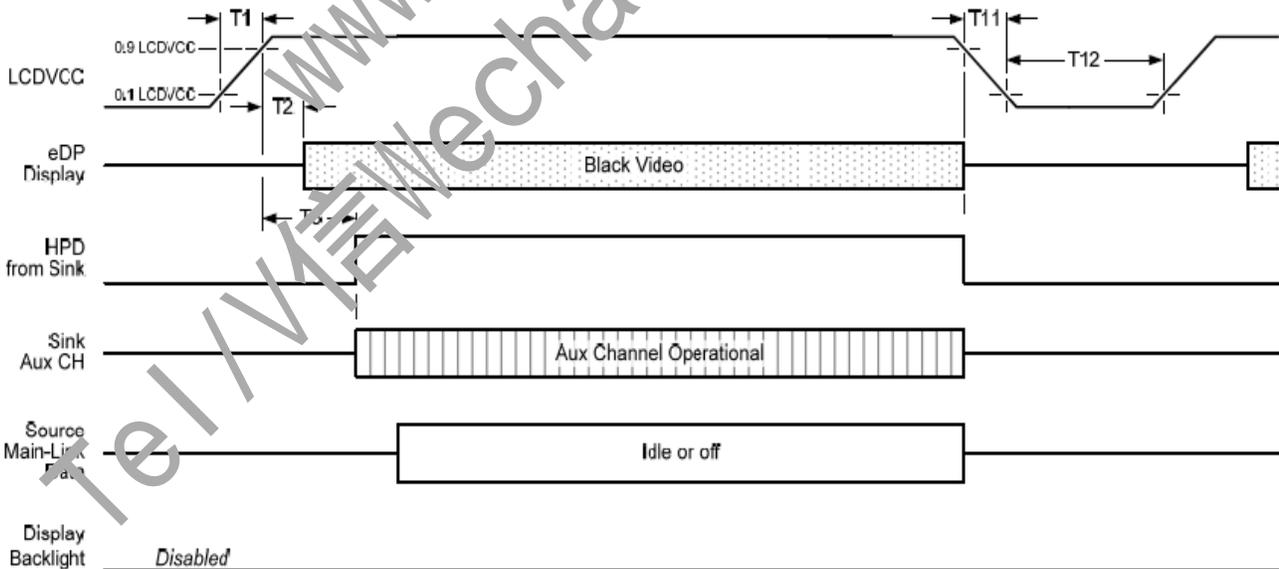

Display port interface power up/down sequence, AUX_CH transaction only



Product Specification

AU OPTRONICS CORPORATION

Display Port Panel Power Sequence Timing Parameters

| Timing parameter | Description | Reqd. by | Limits | | | Notes |
|------------------|---|----------|--------|------|-------|--|
| | | | Min. | Typ. | Max. | |
| T1 | power rail rise time, 10% to 90% | source | 0.5ms | | 10ms | |
| T2 | delay from LCDVDD to black video generation | sink | 0ms | | 200ms | prevents display noise until valid video data is received from the source |
| T3 | delay from LCDVDD to HPD high | sink | 0ms | | 200ms | sink AUX_CH must be operational upon HPD high |
| T4 | delay from HPD high to link training initialization | source | | | | allows for source to read link capability and initialize |
| T5 | link training duration | source | | | | dependant on source link to read training protocol |
| T6 | link idle | source | | | | Min accounts for required BS-Idle pattern. Max allows for source frame synchronization. |
| T7 | delay from valid video data from source to video on display | sink | 0ms | | 50ms | max allows sink validate video data and timing. |
| T8 | delay from valid video data from source to backlight enable | source | | | | source must assure display video is stable. |
| T9 | delay from backlight disable to end of valid video data | source | | | | source must assure backlight is no longer illuminated. |
| T10 | delay from end of valid video data from source to power off | source | 50ms | | 500ms | |
| T11 | power rail fall time, 90% to 10% | source | | | 10ms | |
| T12 | power off time | source | 500ms | | | |

Note1: The sink must include the ability to generate black video autonomously. The sink must automatically enable black video under the following conditions:

- upon LCDVDD power on (with in T2 max), when the "Novideostream_Flag" (VB-ID Bit 3) is received from the source (at the end of T9).
- when no main link data, or invalid video data, is received from the source. Black video must be displayed within 64ms (typ) from the start of either condition. Video data can be deemed invalid based on MSA and timing information, for example.

Note 2: The sink may implement the ability to disable the black video function, as described in Note 1, above, for system development and debugging purpose.

Note 3: The sink must support AUX_CH polling by the source immediately following LCDVDD power on without causing damage to the sink device (the source can re-try if the sink is not ready). The sink must be able to respond to an AUX_CH transaction with the time specified within T3 max.


Note 4: T8>T7




Product Specification

AU OPTRONICS CORPORATION

Display Port panel B/L power sequence timing parameter:

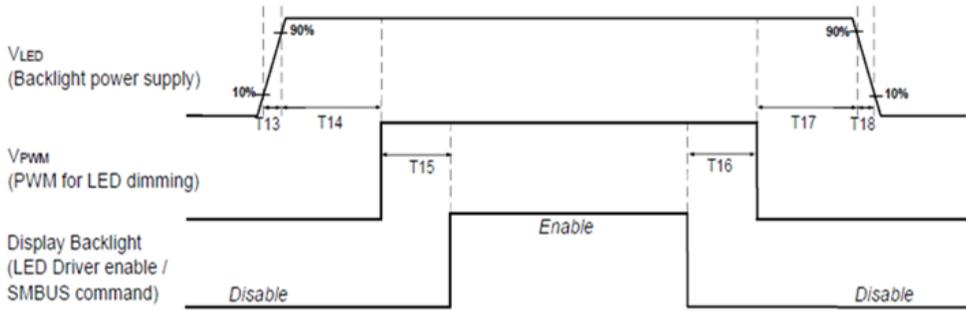

Note : When the adapter is hot plugged, the backlight power supply sequence is shown as below.

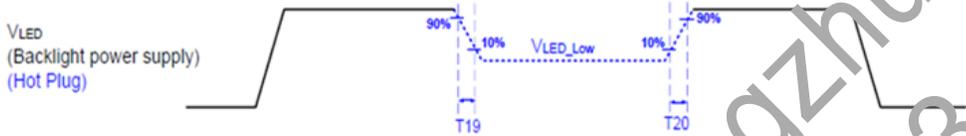

| | Min (ms) | Max (ms) |
|-----|----------|----------|
| T13 | 0.5 | 10 |
| T14 | 10 | - |
| T15 | 10 | - |
| T16 | 10 | - |
| T17 | 10 | - |
| T18 | 0.5 | 10 |
| T19 | 1 | - |
| T20 | 1* | - |

Seamless change: $T19/T20 = 5 \times T_{PWM}^*$

* $T_{PWM}^* = 1/PWM \text{ Frequency}$



Product Specification

AU OPTRONICS CORPORATION

7. Panel Reliability Test

7.1 Vibration Test

Test Spec:

- Test method: Non-Operation
- Acceleration: 1.5 G
- Frequency: 10 - 500Hz Random
- Sweep: 30 Minutes each Axis (X, Y, Z)

7.2 Shock Test

Test Spec:

- Test method: Non-Operation
- Acceleration: 220 G , Half sine wave
- Active time: 2 ms
- Pulse: X,Y,Z .one time for each side

7.3 Reliability Test

| Items | Required Condition | Note |
|----------------------------|--|--------|
| Temperature Humidity Bias | Ta= 40°C, 90%RH, 300h | |
| High Temperature Operation | Ta= 50°C, Dry, 300h | |
| Low Temperature Operation | Ta= 0°C 300h | |
| High Temperature Storage | Ta= 60°C, 35%RH, 300h | |
| Low Temperature Storage | Ta= -20°C, 50%RH, 300h | |
| Thermal Shock Test | Ta=-20°C to 60°C, Duration at 30 min, 100 cycles | |
| ESD | Contact : ±8 KV Air : ±15 KV | Note 1 |


Note 1: According to EN 61000-4-2 , ESD class B: Some performance degradation allowed. No data lost

. Self-recoverable. No hardware failures.

Remark: MTBF (Excluding the LED): 30,000 hours with a confidence level 90%

8. Mechanical Characteristics


8.1 LCM Outline Dimension

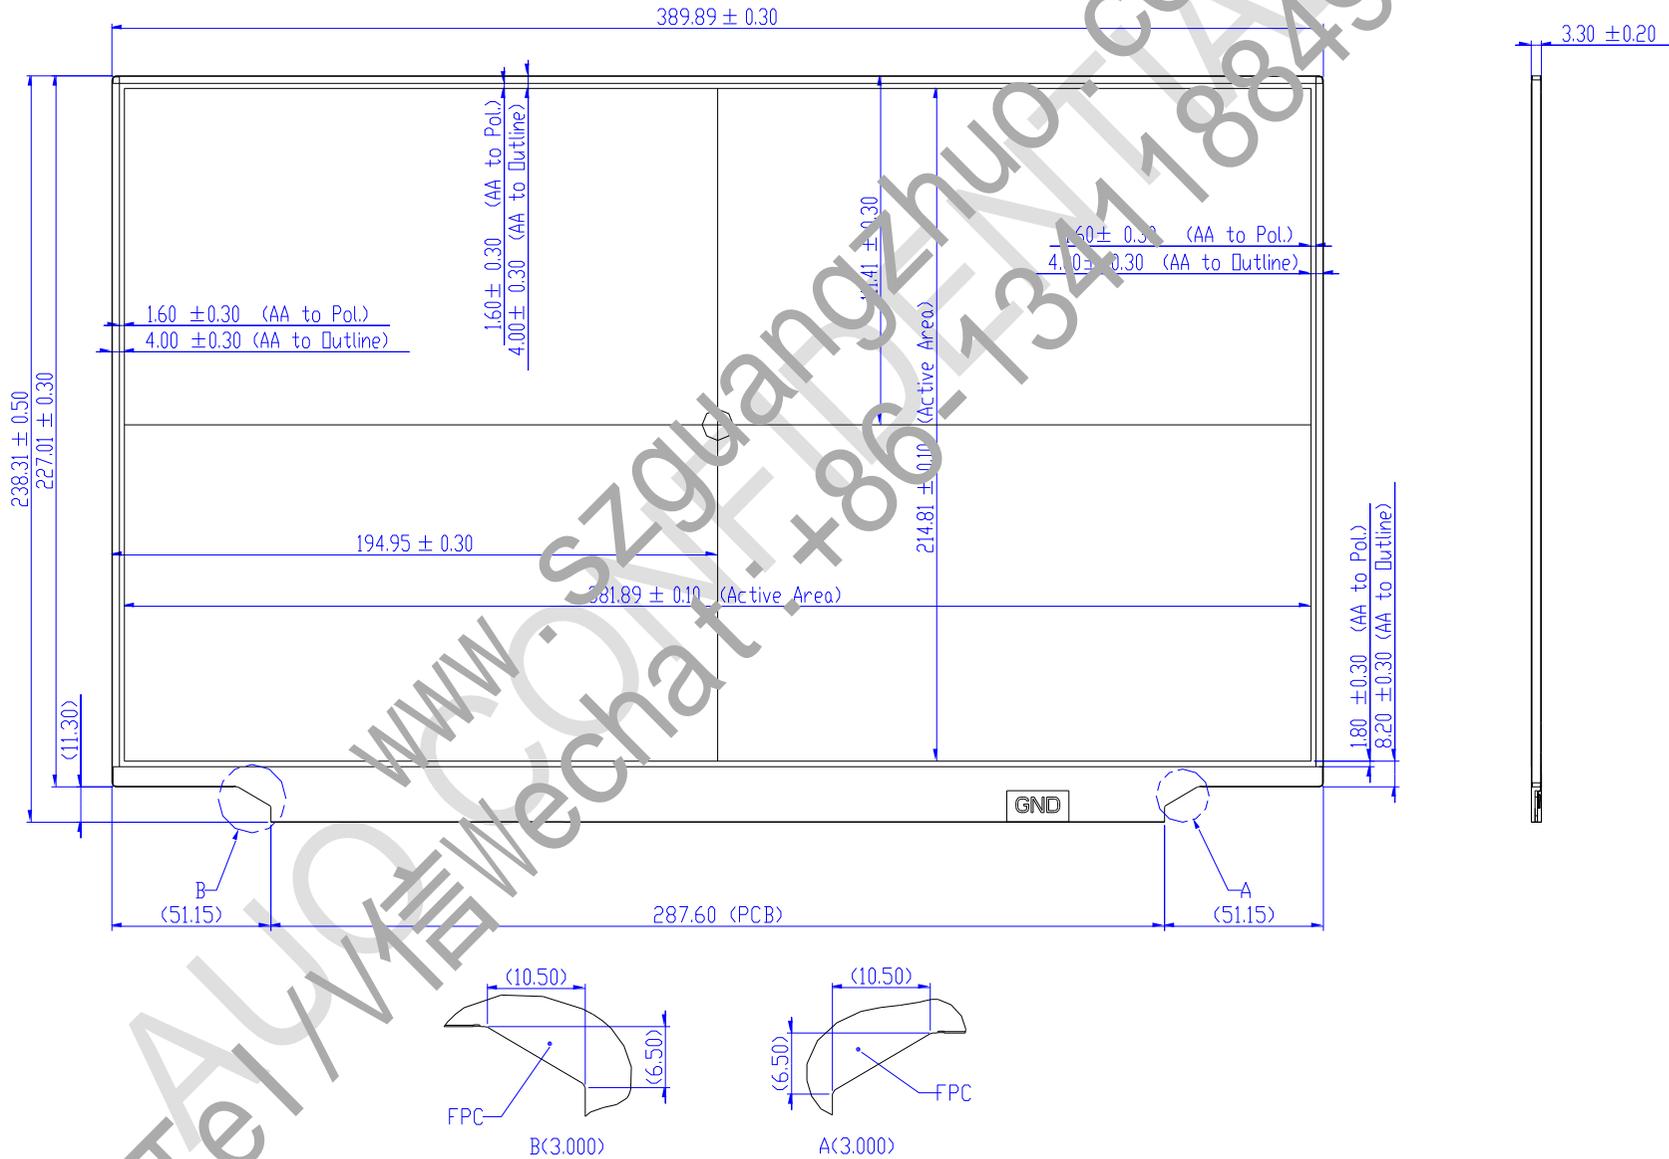



Product Specification

AU OPTRONICS CORPORATION

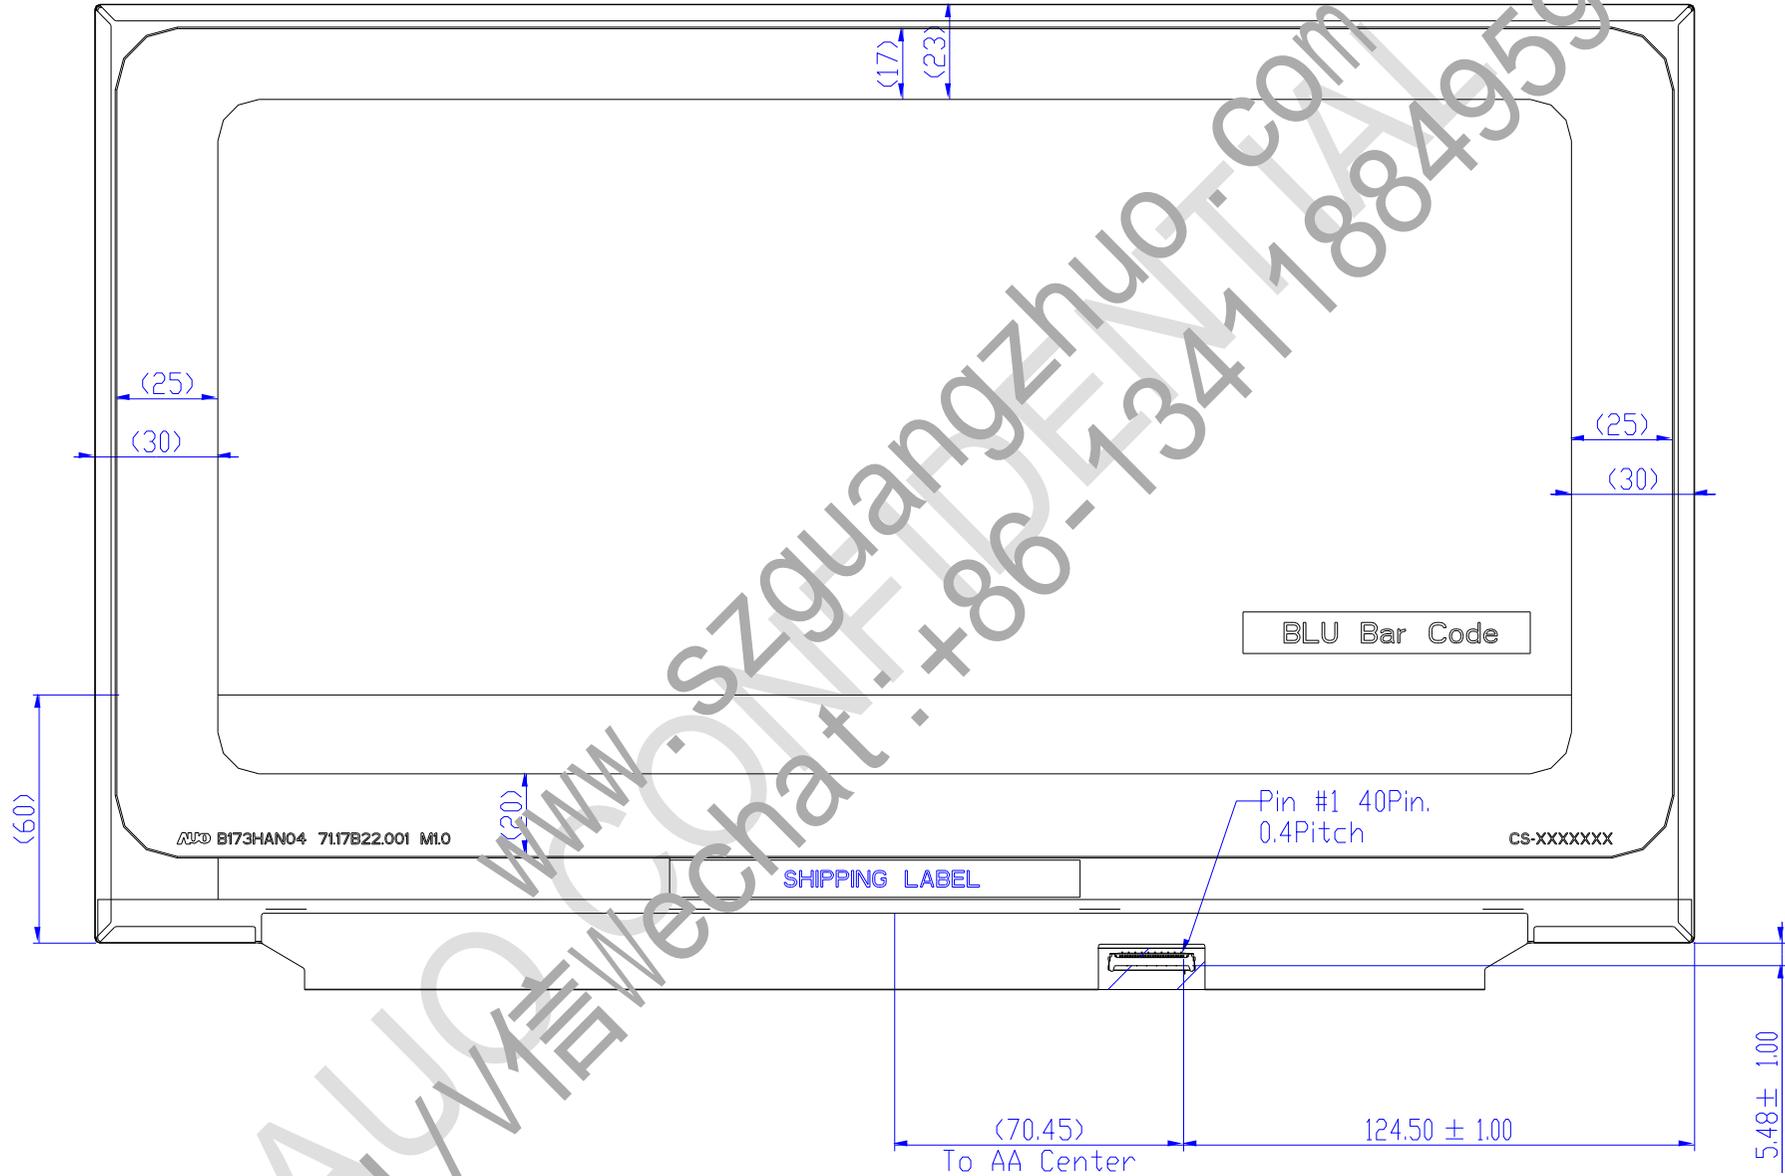

Note: Prevention IC damage, IC positions not allowed any overlap over these areas.



Product Specification


AU OPTRONICS CORPORATION

9. Shipping and Package


9.1 Shipping Label Format



9.2 Carton Package

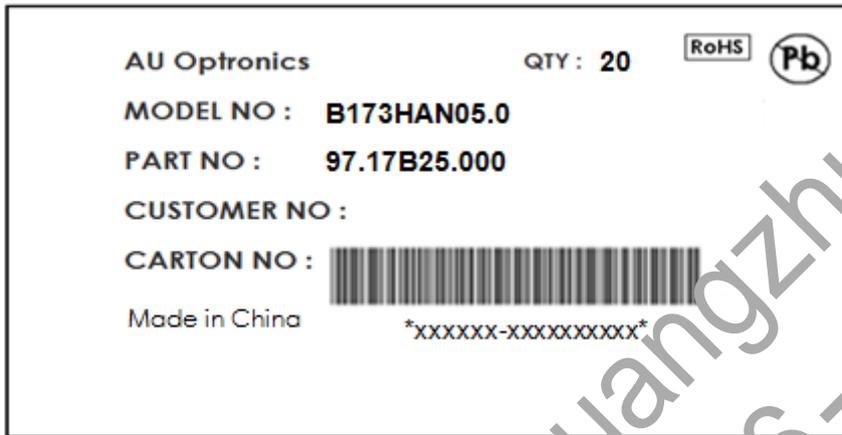

9.3 Shipping Package of Palletizing Sequence

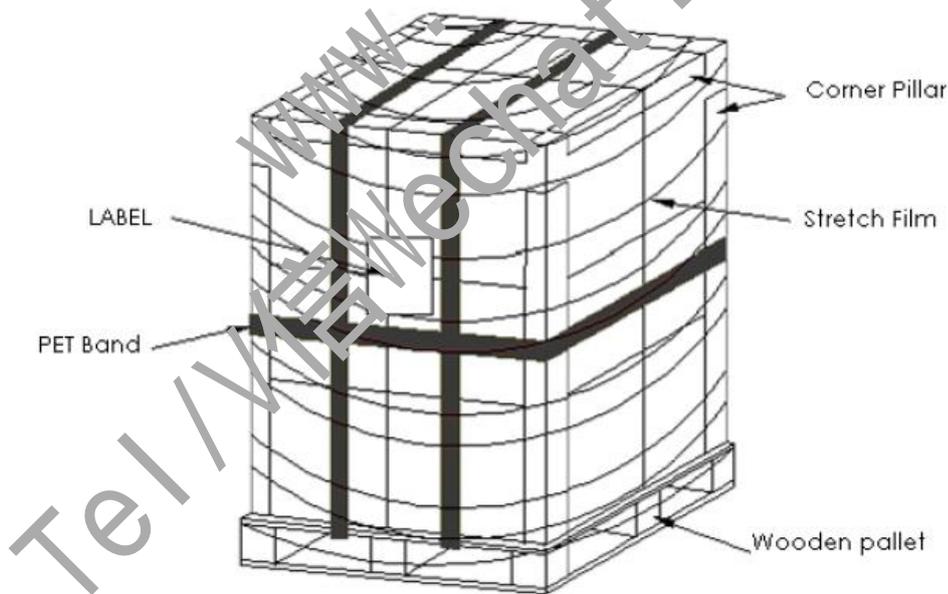



Product Specification

AU OPTRONICS CORPORATION

10. Appendix:

10.1 EDID Description

| Address | FUNCTION | Value | Value | Value |
|---------|---|-------|----------|-------|
| HEX | | HEX | BIN | DEC |
| 00 | Header | 00 | 00000000 | 0 |
| 01 | Header | FF | 11111111 | 255 |
| 02 | Header | FF | 11111111 | 255 |
| 03 | Header | FF | 11111111 | 255 |
| 04 | Header | FF | 11111111 | 255 |
| 05 | Header | FF | 11111111 | 255 |
| 06 | Header | FF | 11111111 | 255 |
| 07 | Header | 00 | 00000000 | 0 |
| 08 | EISA Manuf. Code LSB | 06 | 00000110 | 6 |
| 09 | Compressed ASCII | AF | 10111111 | 175 |
| 0A | Product Code | 9B | 10011101 | 157 |
| 0B | hex, LSB first | 50 | 01010000 | 80 |
| 0C | 32-bit ser # | 00 | 00000000 | 0 |
| 0D | ID S/N - option | 00 | 00000000 | 0 |
| 0E | ID S/N - option | 00 | 00000000 | 0 |
| 0F | ID S/N - option | 00 | 00000000 | 0 |
| 10 | Week of manufacture | 11 | 00010001 | 17 |
| 11 | Year of manufacture | 1D | 00011101 | 29 |
| 12 | EDID Structure ver. | 01 | 00000001 | 1 |
| 13 | EDID revision # | 04 | 00000100 | 4 |
| 14 | Video input def. (digital I/P, non-TMDS, Cr/Cb) | A5 | 10100101 | 165 |
| 15 | Max H image size (rounded to cr.) | 26 | 00100110 | 38 |
| 16 | Max V image size (rounded to cm) | 16 | 00010110 | 22 |
| 17 | Display Gamma $(=\frac{\gamma}{\gamma+100})$ | 78 | 01111000 | 120 |
| 18 | Feature support (no LPM S, Active OFF, RGB, tmg Blk#1) | 03 | 00000011 | 3 |
| 19 | Red/green low bits (Lower 2:2:2:2 bits) | A3 | 10100011 | 163 |
| 1A | Blue/white low bits (Lower 2:2:2:2 bits) | 35 | 00110101 | 53 |
| 1B | Red x (Upper 8 bits) | A6 | 10100110 | 166 |
| 1C | Red y/ highER 8 bits | 53 | 01010011 | 83 |
| 1D | Green x | 4A | 01001010 | 74 |
| 1E | Green y | 9C | 10011100 | 156 |
| 1F | Blue x | 27 | 00100111 | 39 |
| 20 | Blue y | 10 | 00010000 | 16 |
| 21 | White x | 50 | 01010000 | 80 |
| 22 | White y | 54 | 01010100 | 84 |
| 23 | Established timing 1 | 00 | 00000000 | 0 |
| 24 | Established timing 2 | 00 | 00000000 | 0 |
| 25 | Established timing 3 | 00 | 00000000 | 0 |
| 26 | Standard timing #1 | 01 | 00000001 | 1 |
| 27 | Standard timing #1 | 01 | 00000001 | 1 |
| 28 | Standard timing #2 | 01 | 00000001 | 1 |



Product Specification

AU OPTRONICS CORPORATION

| | | | | |
|----|---|----|----------|-----|
| 29 | Standard timing #2 | 01 | 00000001 | 1 |
| 2A | Standard timing #3 | 01 | 00000001 | 1 |
| 2B | Standard timing #3 | 01 | 00000001 | 1 |
| 2C | Standard timing #4 | 01 | 00000001 | 1 |
| 2D | Standard timing #4 | 01 | 00000001 | 1 |
| 2E | Standard timing #5 | 01 | 00000001 | 1 |
| 2F | Standard timing #5 | 01 | 00000001 | 1 |
| 30 | Standard timing #6 | 01 | 00000001 | 1 |
| 31 | Standard timing #6 | 01 | 00000001 | 1 |
| 32 | Standard timing #7 | 01 | 00000001 | 1 |
| 33 | Standard timing #7 | 01 | 00000001 | 1 |
| 34 | Standard timing #8 | 01 | 00000001 | 1 |
| 35 | Standard timing #8 | 01 | 00000001 | 1 |
| 36 | Pixel Clock/10000 LSB | 50 | 01010000 | 80 |
| 37 | Pixel Clock/10000 USB | D0 | 11010000 | 208 |
| 38 | Horz active Lower 8bits | 80 | 10000000 | 128 |
| 39 | Horz blanking Lower 8bits | 50 | 01010000 | 80 |
| 3A | HorzAct:HorzBlnk Upper 4:4 bits | 70 | 01110000 | 112 |
| 3B | Vertical Active Lower 8bits | 38 | 00111000 | 56 |
| 3C | Vertical Blanking Lower 8bits | 1F | 00011111 | 31 |
| 3D | Vert Act : Vertical Blanking (upper 4:4 bit) | 40 | 01000000 | 64 |
| 3E | HorzSync. Offset | 30 | 00110000 | 48 |
| 3F | HorzSync.Width | 20 | 00100000 | 32 |
| 40 | VertSync.Offset : VertSync.Width | A5 | 10100101 | 165 |
| 41 | Horz&Vert Sync Offset/Width Upper 2bits | 00 | 00000000 | 0 |
| 42 | Horizontal Image Size Lower 8bits | 7E | 01111110 | 126 |
| 43 | Vertical Image Size Lower 8bits | D7 | 11010111 | 215 |
| 44 | Horizontal & Vertical Image Size (upper 4:4 bits) | 10 | 00010000 | 16 |
| 45 | Horizontal Border <i>(zero for internal LCD)</i> | 00 | 00000000 | 0 |
| 46 | Vertical Border <i>(zero for internal LCD)</i> | 00 | 00000000 | 0 |
| 47 | Signal <i>(non-intr, norm, no stereo sep sync, neg pol)</i> | 18 | 00011000 | 24 |
| 48 | Pixel Clock/10000 LSB | 50 | 01010000 | 80 |
| 49 | Pixel Clock/10000 USB | D0 | 11010000 | 208 |
| 4A | Horz active Lower 8bits | 80 | 10000000 | 128 |
| 4B | Horz blanking Lower 8bits | 50 | 01010000 | 80 |
| 4C | HorzAct:HorzBlnk Upper 4:4 bits | 70 | 01110000 | 112 |
| 4D | Vertical Active Lower 8bits | 38 | 00111000 | 56 |
| 4E | Vertical Blanking Lower 8bits | 20 | 00100000 | 32 |
| 4F | Vert Act : Vertical Blanking (upper 4:4 bit) | 4D | 01001101 | 77 |
| 50 | HorzSync. Offset | 30 | 00110000 | 48 |
| 51 | HorzSync.Width | 20 | 00100000 | 32 |
| 52 | VertSync.Offset : VertSync.Width | A5 | 10100101 | 165 |
| 53 | Horz&Vert Sync Offset/Width Upper 2bits | 00 | 00000000 | 0 |
| 54 | Horizontal Image Size Lower 8bits | 7E | 01111110 | 126 |
| 55 | Vertical Image Size Lower 8bits | D7 | 11010111 | 215 |
| 56 | Horizontal & Vertical Image Size (upper 4:4 bits) | 10 | 00010000 | 16 |
| 57 | Horizontal Border <i>(zero for internal LCD)</i> | 00 | 00000000 | 0 |



Product Specification

AU OPTRONICS CORPORATION

| | | | | |
|----|--|----|----------|------|
| 58 | Vertical Border (zero for internal LCD) | 00 | 00000000 | 0 |
| 59 | Signal (non-intr, norm, no stero, sep sync, neg pol) | 18 | 00011000 | 24 |
| 5A | descriptor #3 | 00 | 00000000 | 0 |
| 5B | Reserved for definition | 00 | 00000000 | 0 |
| 5C | Reserved for definition | 00 | 00000000 | 0 |
| 5D | ASCII String | FE | 11111110 | 254 |
| 5E | Reserved for definition | 00 | 00000000 | 0 |
| 5F | Manufacture | 41 | 01000001 | 65 |
| 60 | Manufacture | 55 | 01010101 | 85 |
| 61 | Manufacture | 4F | 01001111 | 79 |
| 62 | Reserved for definition | 0A | 00001010 | 10 |
| 63 | Reserved for definition | 20 | 00100000 | 32 |
| 64 | Reserved for definition | 20 | 00100000 | 32 |
| 65 | Reserved for definition | 20 | 00100000 | 32 |
| 66 | Reserved for definition | 20 | 00100000 | 32 |
| 67 | Reserved for definition | 20 | 00100000 | 32 |
| 68 | Reserved for definition | 20 | 00100000 | 32 |
| 69 | Reserved for definition | 20 | 00100000 | 32 |
| 6A | Reserved for definition | 20 | 00100000 | 32 |
| 6B | Reserved for definition | 20 | 00100000 | 32 |
| 6C | Reserved for definition | 00 | 00000000 | 0 |
| 6D | descriptor #4 | 00 | 00000000 | 0 |
| 6E | Reserved for definition | 00 | 00000000 | 0 |
| 6F | Reserved for definition | FE | 11111110 | 254 |
| 70 | Reserved for definition | 00 | 00000000 | 0 |
| 71 | Manufacture P/N | 42 | 01000010 | 66 |
| 72 | Manufacture P/N | 31 | 00110001 | 49 |
| 73 | Manufacture P/N | 37 | 00110111 | 55 |
| 74 | Manufacture P/N | 33 | 00110011 | 51 |
| 75 | Manufacture P/N | 48 | 01001000 | 72 |
| 76 | Manufacture P/N | 41 | 01000001 | 65 |
| 77 | Manufacture P/N | 4E | 01001110 | 78 |
| 78 | Manufacture P/N | 30 | 00110000 | 48 |
| 79 | Manufacture P/N | 35 | 00110101 | 53 |
| 7A | Manufacture P/N | 2E | 00101110 | 46 |
| 7B | Manufacture P/N | 30 | 00110000 | 48 |
| 7C | Reserved for definition | 20 | 00100000 | 32 |
| 7D | Reserved for definition | 0A | 00001010 | 10 |
| 7E | Extension Flag | 00 | 00000000 | 0 |
| 7F | Checksum | A7 | 10100111 | 167 |
| | | | SUM | 7936 |

SUM to
HEX 1F00



Product Specification

AU OPTRONICS CORPORATION

10.2 Notes

| DPCD Ver. | sDRRS | DCR | DMRRS | PSR | MBO | VESA DSC | MSO | Free-Sync | HDR | Dimming |
|-----------|-------|-----|-------|----------------------|-----|----------|-----|-----------|-----|---------|
| 1.4 | off | off | Off | PSR1 off PSR2 off | Off | Off | Off | Off | NA | PWM |

www.szguangzhuo.com
Tel/Wechat: +86-13411884959