

Doc. Number :

- ☐ Tentative Specification
☐ Preliminary Specification
☒ Approval Specification

MODEL NO.: M238HCA
SUFFIX: PMZ

Customer: Common

APPROVED BY SIGNATURE

Name / Title

Note

Product version C1/C2

Please return 1 copy for your confirmation with your signature and comments.

Approved By	Checked By	Prepared By
陳立錚	趙宗信	林致成

- CONTENTS -

1. GENERAL DESCRIPTION	5
1.1 OVERVIEW	5
1.2 GENERAL SPECIFICATIONS	5
2. MECHANICAL SPECIFICATIONS	6
3. ABSOLUTE MAXIMUM RATINGS	7
3.1 ABSOLUTE RATINGS OF ENVIRONMENT	7
3.2 ELECTRICAL ABSOLUTE RATINGS	8
3.2.1 TFT LCD OPEN CELL	8
3.3 ABSOLUTE RATINGS OF ENVIRONMENT (OPEN CELL)	8
4. ELECTRICAL SPECIFICATIONS	9
4.1 FUNCTION BLOCK DIAGRAM	9
4.2 INTERFACE CONNECTIONS	10
4.3 ELECTRICAL CHARACTERISTICS	12
4.3.1 LCD ELETRONICS SPECIFICATION	12
4.3.2 VCC POWER DIP CONDITION	15
4.4 LVDS INPUT SIGNAL SPECIFICATIONS	16
4.4.1 LVDS DATA MAPPING TABLE	16
4.4.2 COLOR DATA INPUT ASSIGNMENT	17
4.5 DISPLAY TIMING SPECIFICATIONS	18
4.6 POWER ON/OFF SEQUENCE	21
5. OPTICAL CHARACTERISTICS	22
5.1 TEST CONDITIONS	22
5.2 OPTICAL SPECIFICATIONS	22
6. RELIABILITY TEST ITEM	26
7. LABEL	27
7.1 INX OPEN CELL LABEL	27
8. PACKING	28
8.1 PACKING SPECIFICATIONS	28
8.2 PACKING METHOD	28
8.3 UN PACKAGING METHOD	29
9. PRECAUTION	30
9.1 ASSEMBLY AND HANDLING PRECAUTIONS	30
9.2 SAFETY PRECAUTIONS	33
9.3 ASSEMBLY AND HANDLING PRECAUTIONS	33
9.4 HANDLING – IN ORDER TO PREVENT PANEL BROKEN, COF AND COMPONENT DAMAGED	34
9.5 STORAGE PRECAUTIONS	34

9.6 OPERATION PRECAUTIONS	34
9.7 OTHER	34
Appendix. OUTLINE DRAWING	34

www.szguangzhuo.com
Tel / 信 Wechat : +86-13411884959

REVISION HISTORY

Version	Date	Page	Description																																																																																																																																																																																																																										
0.0	2024.3.22	All	Tentative Spec Ver.0.0																																																																																																																																																																																																																										
0.1	2024.6.3	5,22	Tentative Spec Ver.0.1																																																																																																																																																																																																																										
1.0	2024.8.6	All	Preliminary Spec Ver.1.0																																																																																																																																																																																																																										
		18	4.5 DISPLAY TIMING SPECIFICATIONS Before <table><tr><th>Signal</th><th>Item</th><th>Symbol</th><th>Min.</th><th>Typ.</th><th>Max.</th><th>Unit</th><th>Note</th></tr><tr><td rowspan="7">LVDS Clock</td><td>Frequency</td><td>F_{clk}</td><td>(55)</td><td>74.25</td><td>(141.13)</td><td>MHz</td><td>(3)</td></tr><tr><td>Period</td><td>T_{clk}</td><td>(7.08)</td><td>13.47</td><td>(18.18)</td><td>ns</td><td>(4)</td></tr><tr><td>Input cycle to cycle jitter</td><td>T_{clkj}</td><td>-0.02*T_{clk}</td><td>-</td><td>0.02*T_{clk}</td><td>ns</td><td>(4)</td></tr><tr><td>Input Clock to data skew</td><td>TLVCCS</td><td>-0.02*T_{clk}</td><td>-</td><td>0.02*T_{clk}</td><td>-</td><td>(5)</td></tr><tr><td>Spread spectrum modulation range</td><td>F_{clk} mod</td><td>-</td><td>F_{clk}</td><td>1.03*F_{clk}</td><td>MHz</td><td>(6)</td></tr><tr><td>Spread spectrum modulation frequency</td><td>F_{SSM}</td><td>-</td><td>-</td><td>100</td><td>KHz</td><td>(6)</td></tr><tr><td>Frame Rate</td><td>F_{fr}</td><td>47</td><td>60</td><td>(120)</td><td>Hz</td><td>-</td></tr><tr><td rowspan="3">Vertical Display Term.</td><td>Total</td><td>T_v</td><td>1095</td><td>1125</td><td>(1200)</td><td>Th</td><td>T_v=T_{vd}+T_{vfb}</td></tr><tr><td>Active Display</td><td>T_{vd}</td><td>1080</td><td>1080</td><td>1080</td><td>Th</td><td>-</td></tr><tr><td>Blank</td><td>T_{vfb}</td><td>15</td><td>45</td><td>(120)</td><td>Th</td><td>-</td></tr><tr><td rowspan="4">Horizontal Display Term.</td><td>Frequency</td><td>F_h</td><td>54.18</td><td>67</td><td>(135)</td><td>KHz</td><td>-</td></tr><tr><td>Total</td><td>T_h</td><td>(1015)</td><td>1100</td><td>1150</td><td>Tc</td><td>T_h=T_{hd}+T_{hb}</td></tr><tr><td>Active Display</td><td>T_{hd}</td><td>960</td><td>960</td><td>960</td><td>Tc</td><td>-</td></tr><tr><td>Blank</td><td>T_{hb}</td><td>(55)</td><td>140</td><td>190</td><td>Tc</td><td>-</td></tr></table> After <table><tr><th>Signal</th><th>Item</th><th>Symbol</th><th>Min.</th><th>Typ.</th><th>Max.</th><th>Unit</th><th>Note</th></tr><tr><td rowspan="7">LVDS Clock</td><td>Frequency</td><td>F_{clk}</td><td>53.7</td><td>74.25</td><td>145</td><td>MHz</td><td>(3)</td></tr><tr><td>Period</td><td>T_{clk}</td><td>6.9</td><td>13.47</td><td>18.63</td><td>ns</td><td>(4)</td></tr><tr><td>Input cycle to cycle jitter</td><td>T_{clkj}</td><td>-0.02*T_{clk}</td><td>-</td><td>0.02*T_{clk}</td><td>ns</td><td>(4)</td></tr><tr><td>Input Clock to data skew</td><td>TLVCCS</td><td>-0.02*T_{clk}</td><td>-</td><td>0.02*T_{clk}</td><td>-</td><td>(5)</td></tr><tr><td>Spread spectrum modulation range</td><td>F_{clk} mod</td><td>-</td><td>F_{clk}</td><td>1.03*F_{clk}</td><td>MHz</td><td>(6)</td></tr><tr><td>Spread spectrum modulation frequency</td><td>F_{SSM}</td><td>-</td><td>-</td><td>100</td><td>KHz</td><td>(6)</td></tr><tr><td>Frame Rate</td><td>F_{fr}</td><td>47</td><td>60</td><td>120</td><td>Hz</td><td>-</td></tr><tr><td rowspan="3">Vertical Display Term.</td><td>Total</td><td>T_v</td><td>1095</td><td>1125</td><td>2960</td><td>Th</td><td>T_v=T_{vd}+T_{vfb}</td></tr><tr><td>Active Display</td><td>T_{vd}</td><td>1080</td><td>1080</td><td>1080</td><td>Th</td><td>-</td></tr><tr><td>Blank</td><td>T_{vfb}</td><td>15</td><td>45</td><td>1880</td><td>Th</td><td>-</td></tr><tr><td rowspan="4">Horizontal Display Term.</td><td>Frequency</td><td>F_h</td><td>52.87</td><td>67.5</td><td>135</td><td>KHz</td><td>-</td></tr><tr><td>Total</td><td>T_h</td><td>1015</td><td>1100</td><td>1150</td><td>Tc</td><td>T_h=T_{hd}+T_{hb}</td></tr><tr><td>Active Display</td><td>T_{hd}</td><td>960</td><td>960</td><td>960</td><td>Tc</td><td>-</td></tr><tr><td>Blank</td><td>T_{hb}</td><td>55</td><td>140</td><td>190</td><td>Tc</td><td>-</td></tr></table>	Signal	Item	Symbol	Min.	Typ.	Max.	Unit	Note	LVDS Clock	Frequency	F _{clk}	(55)	74.25	(141.13)	MHz	(3)	Period	T _{clk}	(7.08)	13.47	(18.18)	ns	(4)	Input cycle to cycle jitter	T _{clkj}	-0.02*T _{clk}	-	0.02*T _{clk}	ns	(4)	Input Clock to data skew	TLVCCS	-0.02*T _{clk}	-	0.02*T _{clk}	-	(5)	Spread spectrum modulation range	F _{clk} mod	-	F _{clk}	1.03*F _{clk}	MHz	(6)	Spread spectrum modulation frequency	F _{SSM}	-	-	100	KHz	(6)	Frame Rate	F _{fr}	47	60	(120)	Hz	-	Vertical Display Term.	Total	T _v	1095	1125	(1200)	Th	T _v =T _{vd} +T _{vfb}	Active Display	T _{vd}	1080	1080	1080	Th	-	Blank	T _{vfb}	15	45	(120)	Th	-	Horizontal Display Term.	Frequency	F _h	54.18	67	(135)	KHz	-	Total	T _h	(1015)	1100	1150	Tc	T _h =T _{hd} +T _{hb}	Active Display	T _{hd}	960	960	960	Tc	-	Blank	T _{hb}	(55)	140	190	Tc	-	Signal	Item	Symbol	Min.	Typ.	Max.	Unit	Note	LVDS Clock	Frequency	F _{clk}	53.7	74.25	145	MHz	(3)	Period	T _{clk}	6.9	13.47	18.63	ns	(4)	Input cycle to cycle jitter	T _{clkj}	-0.02*T _{clk}	-	0.02*T _{clk}	ns	(4)	Input Clock to data skew	TLVCCS	-0.02*T _{clk}	-	0.02*T _{clk}	-	(5)	Spread spectrum modulation range	F _{clk} mod	-	F _{clk}	1.03*F _{clk}	MHz	(6)	Spread spectrum modulation frequency	F _{SSM}	-	-	100	KHz	(6)	Frame Rate	F _{fr}	47	60	120	Hz	-	Vertical Display Term.	Total	T _v	1095	1125	2960	Th	T _v =T _{vd} +T _{vfb}	Active Display	T _{vd}	1080	1080	1080	Th	-	Blank	T _{vfb}	15	45	1880	Th	-	Horizontal Display Term.	Frequency	F _h	52.87	67.5	135	KHz	-	Total	T _h	1015	1100	1150	Tc	T _h =T _{hd} +T _{hb}	Active Display	T _{hd}	960	960	960	Tc	-	Blank	T _{hb}	55	140	190	Tc	-
Signal	Item	Symbol	Min.	Typ.	Max.	Unit	Note																																																																																																																																																																																																																						
LVDS Clock	Frequency	F _{clk}	(55)	74.25	(141.13)	MHz	(3)																																																																																																																																																																																																																						
	Period	T _{clk}	(7.08)	13.47	(18.18)	ns	(4)																																																																																																																																																																																																																						
	Input cycle to cycle jitter	T _{clkj}	-0.02*T _{clk}	-	0.02*T _{clk}	ns	(4)																																																																																																																																																																																																																						
	Input Clock to data skew	TLVCCS	-0.02*T _{clk}	-	0.02*T _{clk}	-	(5)																																																																																																																																																																																																																						
	Spread spectrum modulation range	F _{clk} mod	-	F _{clk}	1.03*F _{clk}	MHz	(6)																																																																																																																																																																																																																						
	Spread spectrum modulation frequency	F _{SSM}	-	-	100	KHz	(6)																																																																																																																																																																																																																						
	Frame Rate	F _{fr}	47	60	(120)	Hz	-																																																																																																																																																																																																																						
Vertical Display Term.	Total	T _v	1095	1125	(1200)	Th	T _v =T _{vd} +T _{vfb}																																																																																																																																																																																																																						
	Active Display	T _{vd}	1080	1080	1080	Th	-																																																																																																																																																																																																																						
	Blank	T _{vfb}	15	45	(120)	Th	-																																																																																																																																																																																																																						
Horizontal Display Term.	Frequency	F _h	54.18	67	(135)	KHz	-																																																																																																																																																																																																																						
	Total	T _h	(1015)	1100	1150	Tc	T _h =T _{hd} +T _{hb}																																																																																																																																																																																																																						
	Active Display	T _{hd}	960	960	960	Tc	-																																																																																																																																																																																																																						
	Blank	T _{hb}	(55)	140	190	Tc	-																																																																																																																																																																																																																						
Signal	Item	Symbol	Min.	Typ.	Max.	Unit	Note																																																																																																																																																																																																																						
LVDS Clock	Frequency	F _{clk}	53.7	74.25	145	MHz	(3)																																																																																																																																																																																																																						
	Period	T _{clk}	6.9	13.47	18.63	ns	(4)																																																																																																																																																																																																																						
	Input cycle to cycle jitter	T _{clkj}	-0.02*T _{clk}	-	0.02*T _{clk}	ns	(4)																																																																																																																																																																																																																						
	Input Clock to data skew	TLVCCS	-0.02*T _{clk}	-	0.02*T _{clk}	-	(5)																																																																																																																																																																																																																						
	Spread spectrum modulation range	F _{clk} mod	-	F _{clk}	1.03*F _{clk}	MHz	(6)																																																																																																																																																																																																																						
	Spread spectrum modulation frequency	F _{SSM}	-	-	100	KHz	(6)																																																																																																																																																																																																																						
	Frame Rate	F _{fr}	47	60	120	Hz	-																																																																																																																																																																																																																						
Vertical Display Term.	Total	T _v	1095	1125	2960	Th	T _v =T _{vd} +T _{vfb}																																																																																																																																																																																																																						
	Active Display	T _{vd}	1080	1080	1080	Th	-																																																																																																																																																																																																																						
	Blank	T _{vfb}	15	45	1880	Th	-																																																																																																																																																																																																																						
Horizontal Display Term.	Frequency	F _h	52.87	67.5	135	KHz	-																																																																																																																																																																																																																						
	Total	T _h	1015	1100	1150	Tc	T _h =T _{hd} +T _{hb}																																																																																																																																																																																																																						
	Active Display	T _{hd}	960	960	960	Tc	-																																																																																																																																																																																																																						
	Blank	T _{hb}	55	140	190	Tc	-																																																																																																																																																																																																																						
		22	5.2 OPTICAL SPECIFICATIONS Before <table><tr><th>Item</th><th>Symbol</th><th>Condition</th><th>Min.</th><th>Typ.</th><th>Max.</th><th>Unit</th><th>Note</th></tr><tr><td rowspan="11">Color Chromaticity (CIE 1931)</td><td rowspan="3">Red</td><td>R_x</td><td>-</td><td>-</td><td>(0.662)</td><td>-</td><td rowspan="9">(1), (5), (7)</td></tr><tr><td>R_y</td><td>-</td><td>-</td><td>(0.331)</td><td>-</td></tr><tr><td>G_x</td><td>-</td><td>-</td><td>(0.274)</td><td>-</td></tr><tr><td rowspan="3">Green</td><td>G_y</td><td>θ_x=0°, θ_y=0°, CS-2000, R=G=B=255, Gray scale, C light</td><td>Typ - 0.03</td><td>(0.586)</td><td>Typ + 0.03</td><td>-</td></tr><tr><td>B_x</td><td>-</td><td>(0.138)</td><td>(0.138)</td><td>-</td></tr><tr><td>B_y</td><td>-</td><td>(0.071)</td><td>(0.071)</td><td>-</td></tr><tr><td rowspan="3">Blue</td><td>W_x</td><td>-</td><td>(0.321)</td><td>(0.321)</td><td>-</td></tr><tr><td>W_y</td><td>-</td><td>(0.357)</td><td>(0.357)</td><td>-</td></tr><tr><td>W_z</td><td>-</td><td>-</td><td>-</td><td>-</td></tr><tr><td>Center Transmittance</td><td>T%</td><td>(4.28)</td><td>(4.75)</td><td>-</td><td>%</td><td>(1), (6)</td></tr><tr><td>Contrast Ratio</td><td>CR</td><td>(1050)</td><td>(1500)</td><td>-</td><td>-</td><td>(1), (2)</td></tr></table> After <table><tr><th>Item</th><th>Symbol</th><th>Condition</th><th>Min.</th><th>Typ.</th><th>Max.</th><th>Unit</th><th>Note</th></tr><tr><td rowspan="11">Color Chromaticity (CIE 1931)</td><td rowspan="3">Red</td><td>R_x</td><td>-</td><td>0.661</td><td>0.661</td><td>-</td><td rowspan="9">(1), (5), (7)</td></tr><tr><td>R_y</td><td>-</td><td>0.331</td><td>0.331</td><td>-</td></tr><tr><td>G_x</td><td>-</td><td>0.274</td><td>0.274</td><td>-</td></tr><tr><td rowspan="3">Green</td><td>G_y</td><td>θ_x=0°, θ_y=0°, CS-2000, R=G=B=255, Gray scale, C light</td><td>Typ - 0.03</td><td>0.585</td><td>Typ + 0.03</td><td>-</td></tr><tr><td>B_x</td><td>-</td><td>0.139</td><td>0.139</td><td>-</td></tr><tr><td>B_y</td><td>-</td><td>0.070</td><td>0.070</td><td>-</td></tr><tr><td rowspan="3">Blue</td><td>W_x</td><td>-</td><td>0.318</td><td>0.318</td><td>-</td></tr><tr><td>W_y</td><td>-</td><td>0.353</td><td>0.353</td><td>-</td></tr><tr><td>W_z</td><td>-</td><td>-</td><td>-</td><td>-</td></tr><tr><td>Center Transmittance</td><td>T%</td><td>(4.28)</td><td>(4.75)</td><td>-</td><td>%</td><td>(1), (6)</td></tr><tr><td>Contrast Ratio</td><td>CR</td><td>(1050)</td><td>(1500)</td><td>-</td><td>-</td><td>(1), (2)</td></tr></table>	Item	Symbol	Condition	Min.	Typ.	Max.	Unit	Note	Color Chromaticity (CIE 1931)	Red	R _x	-	-	(0.662)	-	(1), (5), (7)	R _y	-	-	(0.331)	-	G _x	-	-	(0.274)	-	Green	G _y	θ _x =0°, θ _y =0°, CS-2000, R=G=B=255, Gray scale, C light	Typ - 0.03	(0.586)	Typ + 0.03	-	B _x	-	(0.138)	(0.138)	-	B _y	-	(0.071)	(0.071)	-	Blue	W _x	-	(0.321)	(0.321)	-	W _y	-	(0.357)	(0.357)	-	W _z	-	-	-	-	Center Transmittance	T%	(4.28)	(4.75)	-	%	(1), (6)	Contrast Ratio	CR	(1050)	(1500)	-	-	(1), (2)	Item	Symbol	Condition	Min.	Typ.	Max.	Unit	Note	Color Chromaticity (CIE 1931)	Red	R _x	-	0.661	0.661	-	(1), (5), (7)	R _y	-	0.331	0.331	-	G _x	-	0.274	0.274	-	Green	G _y	θ _x =0°, θ _y =0°, CS-2000, R=G=B=255, Gray scale, C light	Typ - 0.03	0.585	Typ + 0.03	-	B _x	-	0.139	0.139	-	B _y	-	0.070	0.070	-	Blue	W _x	-	0.318	0.318	-	W _y	-	0.353	0.353	-	W _z	-	-	-	-	Center Transmittance	T%	(4.28)	(4.75)	-	%	(1), (6)	Contrast Ratio	CR	(1050)	(1500)	-	-	(1), (2)																																																																								
Item	Symbol	Condition	Min.	Typ.	Max.	Unit	Note																																																																																																																																																																																																																						
Color Chromaticity (CIE 1931)	Red	R _x	-	-	(0.662)	-	(1), (5), (7)																																																																																																																																																																																																																						
		R _y	-	-	(0.331)	-																																																																																																																																																																																																																							
		G _x	-	-	(0.274)	-																																																																																																																																																																																																																							
	Green	G _y	θ _x =0°, θ _y =0°, CS-2000, R=G=B=255, Gray scale, C light	Typ - 0.03	(0.586)	Typ + 0.03		-																																																																																																																																																																																																																					
		B _x	-	(0.138)	(0.138)	-																																																																																																																																																																																																																							
		B _y	-	(0.071)	(0.071)	-																																																																																																																																																																																																																							
	Blue	W _x	-	(0.321)	(0.321)	-																																																																																																																																																																																																																							
		W _y	-	(0.357)	(0.357)	-																																																																																																																																																																																																																							
		W _z	-	-	-	-																																																																																																																																																																																																																							
	Center Transmittance	T%	(4.28)	(4.75)	-	%	(1), (6)																																																																																																																																																																																																																						
	Contrast Ratio	CR	(1050)	(1500)	-	-	(1), (2)																																																																																																																																																																																																																						
Item	Symbol	Condition	Min.	Typ.	Max.	Unit	Note																																																																																																																																																																																																																						
Color Chromaticity (CIE 1931)	Red	R _x	-	0.661	0.661	-	(1), (5), (7)																																																																																																																																																																																																																						
		R _y	-	0.331	0.331	-																																																																																																																																																																																																																							
		G _x	-	0.274	0.274	-																																																																																																																																																																																																																							
	Green	G _y	θ _x =0°, θ _y =0°, CS-2000, R=G=B=255, Gray scale, C light	Typ - 0.03	0.585	Typ + 0.03		-																																																																																																																																																																																																																					
		B _x	-	0.139	0.139	-																																																																																																																																																																																																																							
		B _y	-	0.070	0.070	-																																																																																																																																																																																																																							
	Blue	W _x	-	0.318	0.318	-																																																																																																																																																																																																																							
		W _y	-	0.353	0.353	-																																																																																																																																																																																																																							
		W _z	-	-	-	-																																																																																																																																																																																																																							
	Center Transmittance	T%	(4.28)	(4.75)	-	%	(1), (6)																																																																																																																																																																																																																						
	Contrast Ratio	CR	(1050)	(1500)	-	-	(1), (2)																																																																																																																																																																																																																						
		5	1.2 GENERAL SPECIFICATIONS Weight Typ.520→ Typ.533																																																																																																																																																																																																																										
		6	2. MECHANICAL SPECIFICATIONS Weight Typ.520→ Typ.533, Max.546→ Max.560																																																																																																																																																																																																																										
2.0	2024.8.20	All	Approval Spec Ver. 2.0																																																																																																																																																																																																																										
3.0	2024.8.20	All	Approval Spec Ver. 3.0																																																																																																																																																																																																																										
3.1	2024.10.24	5	Surface Treatment: High resolution adaptable AG, 3H hard coating→AG type, 3H hard coating, Haze 25																																																																																																																																																																																																																										

1. GENERAL DESCRIPTION


1.1 OVERVIEW

The M238HCA-PMZ is a 23.8" TFT Liquid Crystal Display MNT cell with driver ICs and a 30-pins-2ch-LVDS circuit board. The product supports 1920 x 1080 Full HD mode and can display up to 16.7M colors. The backlight unit is not built in.

1.2 GENERAL SPECIFICATIONS

Item	Specification	Unit	Note
Screen Size	23.8 inch Diagonal	mm	-
Driver Element	a-si TFT active matrix	-	-
Pixel Number	1920 x R.G.B. x 1080	pixel	-
Pixel Pitch	0.2745(H) x 0.2745(V)	mm	-
Pixel Arrangement	RGB vertical stripe	-	-
Display Colors	16.7M(6Bit+Hi-FRC)	color	-
Transmissive Mode	AAS, Normally Black	-	-
Contrast Ratio	1500:1(typ.)	-	(3)
Transmittance	4.75 (typ.)	%	-
Color Gamut	sRGB 99%	-	(2)
Response Time	14ms (G to G, typ.)	-	-
Weight	Typ.533g	-	-
Display Orientation	Signal Input with "INX"	-	(1)
Surface Treatment	AG type, 3H hard coating, Haze 25	-	-
Power Consumption	Total cell: 1.2 W(Typ) (Vcc = 5.0V, Fr = 60Hz, White Pattern)		-

Note(1)

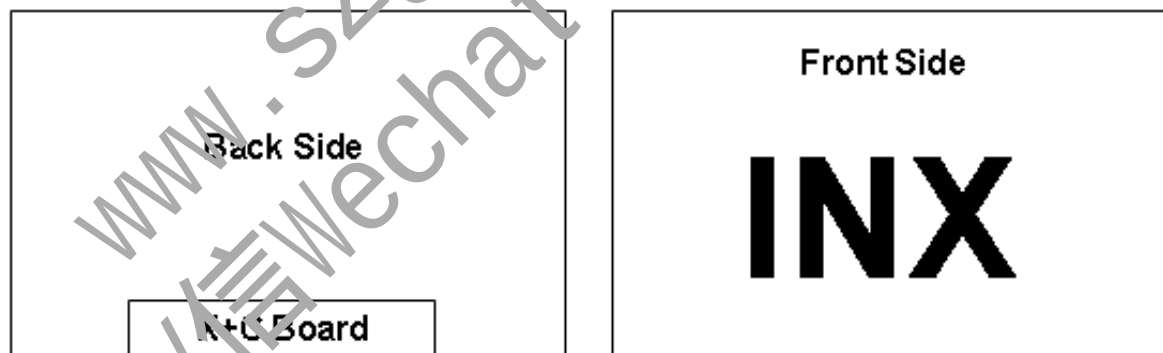

Note(2) The Color Gamut is measured with INX BLU.

Based on Coverage of sRGB color space on CIE-1931 system

Note(3) The Contrast Ratio is measured with INX BLU (w/o DBEF)


2. MECHANICAL SPECIFICATIONS

Item	Typ.	Max.	Unit	Note
Weight	533	560	g	
I/F connector mounting position	The mounting inclination of the connector makes the screen center within $\pm 0.5\text{mm}$ as the horizontal.			(2)

Note (1) Please refer to the attached drawings for more information of front and back outline dimensions.

(2) Connector mounting position

(3) Please refer to sec.3.1 for more information of power consumption.

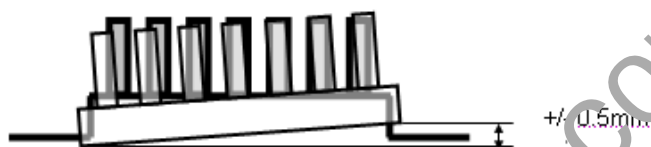

3. ABSOLUTE MAXIMUM RATINGS

3.1 ABSOLUTE RATINGS OF ENVIRONMENT

Item	Symbol	Value		Unit	Note
		Min.	Max.		
Storage Temperature	TST	-20	60	°C	(1)
Operating Ambient Temperature	TOP	0	50	°C	(1),(2-1),(2-2)
Panel surface temperature(Operation)	Tsurface	0	65	°C	(1),(2-1),(2-2)

Note (1)


(a) 90 %RH Max.

(b) Wet-bulb temperature should be 39 °C Max.

(c) No condensation.

Note (2-1) Panel surface temperature should be under condition of $V_{cc}=5V$, $F_r=60Hz$, typical LED string current, 25°C ambient temperature, and no humidity control.

Note (2-2) Any condition of ambient operating temperature, the surface of active area should be keeping not higher than 65°C.

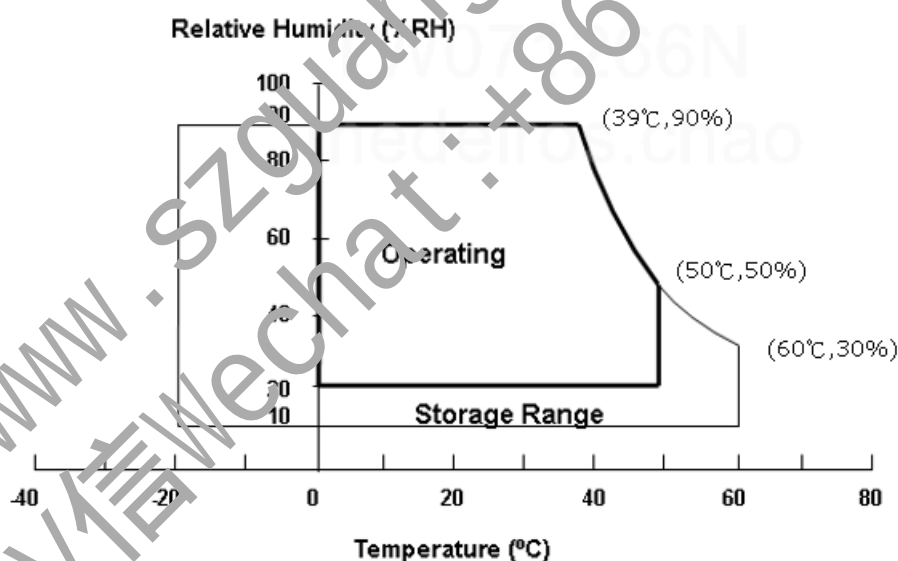

3.2 ELECTRICAL ABSOLUTE RATINGS

3.2.1 TFT LCD OPEN CELL

Item	Symbol	Value		Unit	Note
		Min.	Max.		
Power Supply Voltage	VCC	-0.3	6.0	V	(1)
Logic Input Voltage	V _{IN}	-0.3	3.6	V	

Note (1) Permanent damage to the device may occur if maximum values are exceeded. Function operation should be restricted to the conditions described under Normal Operating Conditions.

3.3 ABSOLUTE RATINGS OF ENVIRONMENT (OPEN CELL)

High temperature or humidity may reduce the performance of panel. Please store LCD panel within the specified storage conditions.

Storage Condition: With packing.


Storage temperature range: 25±5 °C.

Storage humidity range: 50±10%RH.

Shelf life: 30days

4. ELECTRICAL SPECIFICATIONS

4.1 FUNCTION BLOCK DIAGRAM

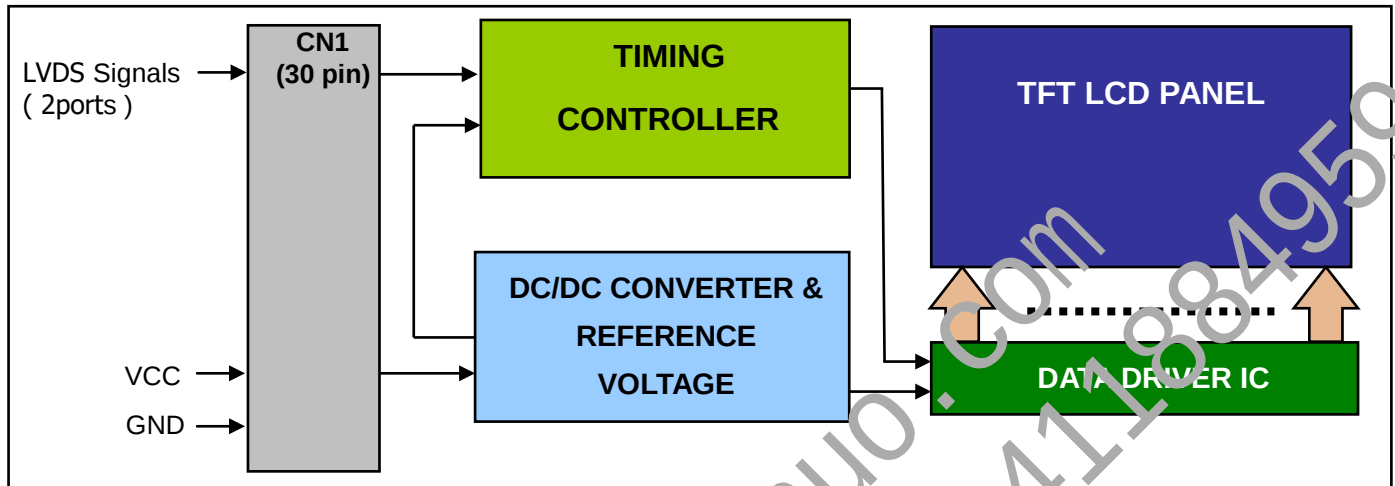


4.2 INTERFACE CONNECTIONS

PIN ASSIGNMENT(CN1 : 30pins)

Pin	Name	Description
1	RXO0-	Negative LVDS differential data input. Channel O0 (odd)
2	RXO0+	Positive LVDS differential data input. Channel O0 (odd)
3	RXO1-	Negative LVDS differential data input. Channel O1 (odd)
4	RXO1+	Positive LVDS differential data input. Channel O1 (odd)
5	RXO2-	Negative LVDS differential data input. Channel O2 (odd)
6	RXO2+	Positive LVDS differential data input. Channel O2 (odd)
7	GND	Ground
8	RXOC-	Negative LVDS differential clock input. (odd)
9	RXOC+	Positive LVDS differential clock input. (odd)
10	RXO3-	Negative LVDS differential data input. Channel O3 (odd)
11	RXO3+	Positive LVDS differential data input. Channel O3 (odd)
12	RXE0-	Negative LVDS differential data input. Channel E0 (even)
13	RXE0+	Positive LVDS differential data input. Channel E0 (even)
14	GND	Ground
15	RXE1-	Negative LVDS differential data input. Channel E1 (even)
16	RXE1+	Positive LVDS differential data input. Channel E1 (even)
17	GND	Ground
18	RXE2-	Negative LVDS differential data input. Channel E2 (even)
19	RXE2+	Positive LVDS differential data input. Channel E2 (even)
20	RXEC-	Negative LVDS differential clock input. (even)
21	RXEC+	Positive LVDS differential clock input. (even)
22	RXE3-	Negative LVDS differential data input. Channel E3 (even)
23	RXE3+	Positive LVDS differential data input. Channel E3 (even)
24	GND	Ground
25	NC	For LCD internal use only, Do not connect
26	SCL	I2C clock (for auto Vcom)
27	SDA	I2C data (for auto Vcom)
28	VCC	+5.0V power supply
29	VCC	+5.0V power supply
30	VCC	+5.0V power supply

Note. The direction of pin assignment is shown as below

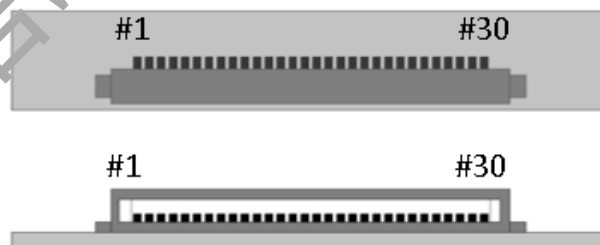

Notice: There would be compatible issues if not using the indicated connectors in the matching list.

Connector Information

Note (1) Connector Part No.:


Item	Description
Type Part Number	PTwo 187114-30091 or Equivalent CviLux CVSC30NT0RA-NH

Note (2) User's connector Part No:

Item	Description
Mating Wire Cable Connector Part No	JAE FI-X30HL PTwo LVDS 27 type_287130-403029-1 Hamburg FCC-W00-300000-000M or compatible

Note (3) The first pixel is odd.

Note (4) Input signal of even and odd clock should be the same timing

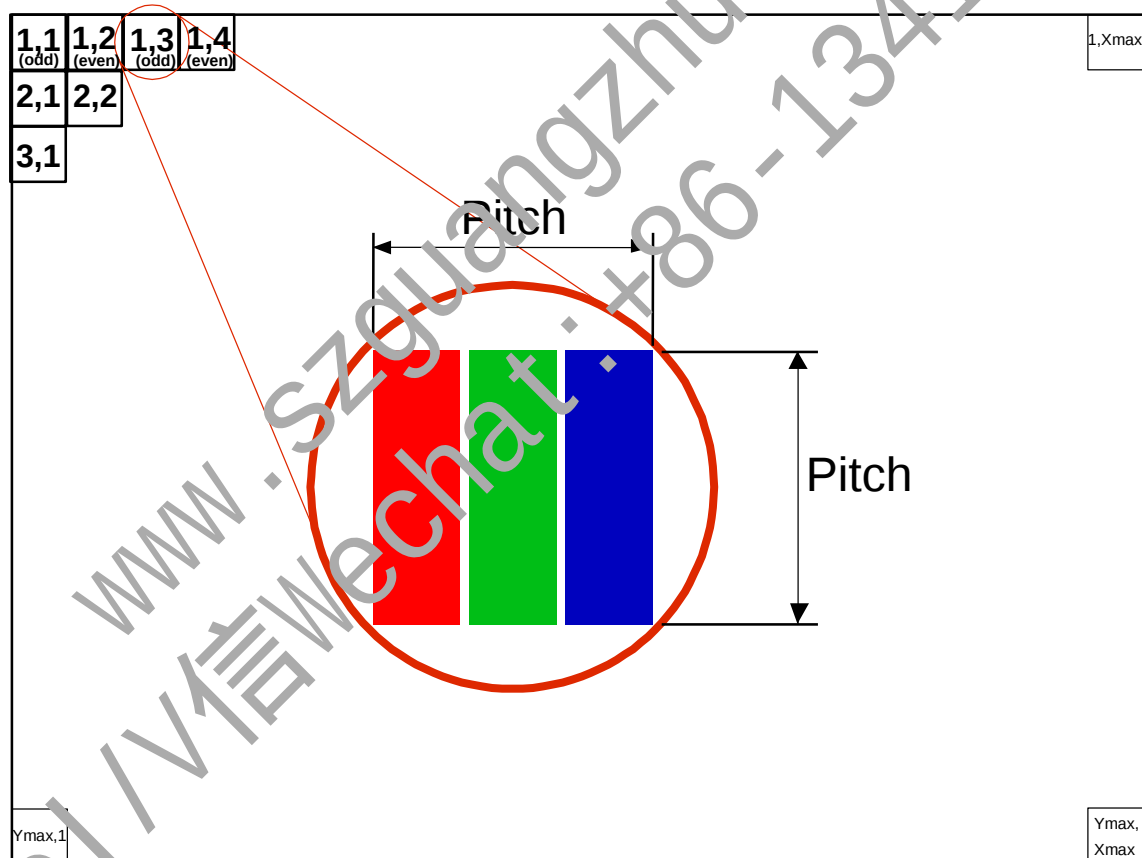

Note. The direction of pin assignment is shown as below


4.3 ELECTRICAL CHARACTERISTICS

4.3.1 LCD ELETRONICS SPECIFICATION


Parameter		Symbol	Value			Unit	Note
			Min.	Typ.	Max.		
Power Supply Voltage		V _{CC}	4.5	5.0	5.5	V	
Ripple Voltage		V _{RP}	-	-	300	mV	
Rush Current		I _{RUSH}	-	-	3	A	(2)
Power Supply Current	White	I _{CC}	-	0.24	0.26	A	(3)a
	Black		-	0.23	0.26	A	(3)b
	Max Power Pattern		-	0.50	0.55	A	(3)c
Power Consumption	Typ. FR	PLCD	-	2.50	2.75	Watt	(4)
	Max. FR		-	4.70	5.51	Watt	
LVDS interface	Differential Input Voltage	V _{ID}	100	-	600	mV	
	Common Input Voltage	V _{CM}	1.0	1.2	1.4	V	
	Differential Input High Threshold Voltage	V _{TH}	-	-	0.1	V	
	Differential Input Low Threshold Voltage	V _{TL}	-0.1	-	-	V	

Note (1) The ambient temperature is Ta = 25 ± 2 °C.

Note (2) Measurement Conditions:

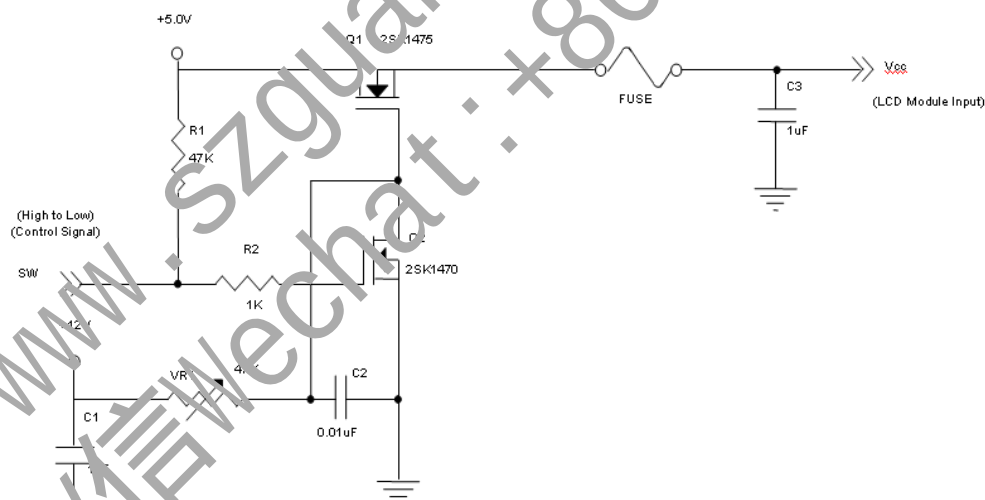

Vcc rising time is 470 μ s

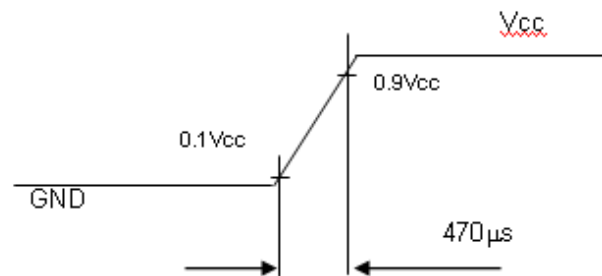

Note (3) The specified power supply current is under the conditions at $V_{cc} = 5V$, $T_a = 25 \pm 2^\circ C$, $F_r = 60Hz$, whereas a power dissipation check pattern below is displayed.

a. White Pattern




Active Area

b. Black Pattern



Active Area

c. Horizontal Pattern

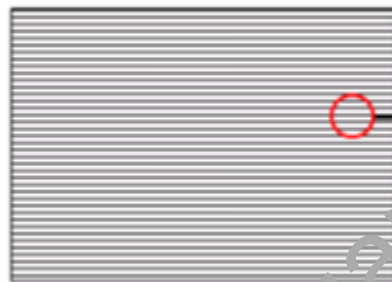


Active Area




Note (4) The power consumption is specified at the pattern with the maximum current.

Note (5) The LVDS input characteristics are as follows:


Single-end Signals

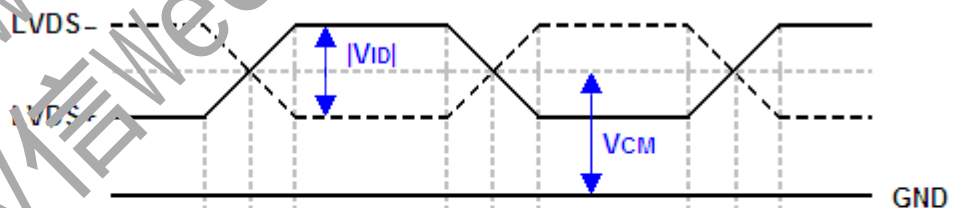

Differential Signal

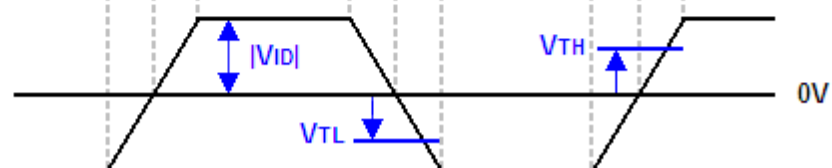

4.3.2 VCC POWER DIP CONDITION

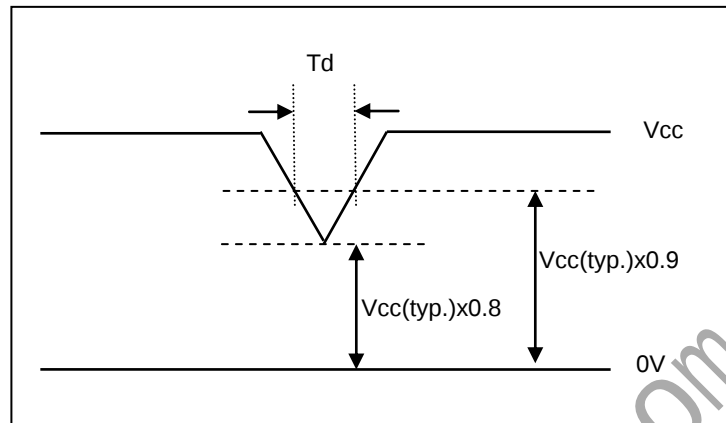

Dip condition: $4.0 \leq V_{CC} \leq 4.5$, $T_d \leq 20\text{ms}$

4.4 LVDS INPUT SIGNAL SPECIFICATIONS

4.4.1 LVDS DATA MAPPING TABLE

LVDS Channel O0	LVDS output	D7	D6	D4	D3	D2	D1	D0
	Data order	OG0	OR5	OR4	OR3	OR2	OR1	OR0
LVDS Channel O1	LVDS output	D18	D15	D14	D13	D12	D9	D8
	Data order	OB1	OB0	OG5	OG4	OG3	OG2	OG1
LVDS Channel O2	LVDS output	D26	D25	D24	D22	D21	D20	D19
	Data order	DE	NA	NA	OB5	OB4	OB3	OB2
LVDS Channel O3	LVDS output	D23	D17	D16	D11	D10	D5	D27
	Data order	NA	OB7	OB6	OG7	OG6	OR7	OR6
LVDS Channel E0	LVDS output	D7	D6	D4	D3	D2	D1	D0
	Data order	EG0	ER5	ER4	ER3	ER2	ER1	ER0
LVDS Channel E1	LVDS output	D18	D15	D14	D13	D12	D9	D8
	Data order	EB1	EB0	EG5	EG4	EG3	EG2	EG1
LVDS Channel E2	LVDS output	D26	D25	D24	D22	D21	D20	D19
	Data order	DE	NA	NA	EB5	EB4	EB3	EB2
LVDS Channel E3	LVDS output	D23	D17	D16	D11	D10	D5	D27
	Data order	NA	EB7	EB6	EG7	EG6	ER7	ER6

4.4.2 COLOR DATA INPUT ASSIGNMENT

The brightness of each primary color (red, green and blue) is based on the 8-bit gray scale data input for the color. The higher the binary input, the brighter the color. The table below provides the assignment of color versus data input.

Color		Data Signal																							
		Red								Green								Blue							
		R7	R6	R5	R4	R3	R2	R1	R0	G7	G6	G5	G4	G3	G2	G1	G0	B7	B6	B5	B4	B3	B2	B1	B0
Basic Colors	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Green	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Cyan	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	Magenta	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Gray Scale Of Red	Red(0) / Dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(1)	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(2)	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...
	Red(253)	1	1	1	1	1	1	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(254)	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(255)	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...
Gray Scale Of Green	Green(0) / Dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Green(1)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0
	Green(2)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0
	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...
	Green(253)	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	1	0	0	0	0	0	0	0	0
	Green(254)	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0
	Green(255)	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...
Gray Scale Of Blue	Blue(0) / Dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Blue(1)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
	Blue(2)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0
	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...
	Blue(253)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	0	1
	Blue(254)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0
	Blue(255)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...

Note (1) 0: Low Level Voltage, 1: High Level Voltage

4.5 DISPLAY TIMING SPECIFICATIONS

The input signal timing specifications are shown as the following table and timing diagram.

Signal	Item	Symbol	Min.	Typ.	Max.	Unit	Note
LVDS Clock	Frequency	Fc	53.66	74.25	145	MHz	(3)
	Period	Tc	6.89	13.47	18.63	ns	
	Input cycle to cycle jitter	T _{rci}	-0.02*Tc	-	0.02*Tc	ns	(4)
	Input Clock to data skew	TLVCCS	-0.02*Tc	-	0.02*Tc		(5)
	Spread spectrum modulation range	Fclkin_mod	0.97*Fc	-	1.03*Fc	MHz	(6)
	Spread spectrum modulation frequency	F _{SSM}	-	-	100	KHz	
Vertical Display Term	Frame Rate	Fr	47	60	120	Hz	-
	Total	Tv	1095	1125	2960	1n	Tv=Tvd+Tvb
	Active Display	Tvd	1080	1080	1080	Th	-
	Blank	Tvb	15	45	1880	Th	-
Horizontal Display Term	Frequency	Fh	52.87	67.5	135	KHz	
	Total	Th	1015	1100	1150	Tc	Th=Thd+Thb
	Active Display	Thd	960	960	960	Tc	-
	Blank	Thb	55	140	190	Tc	-

Note(1): In Free-sync mode, only guaranteed no functional failure, but don't guaranteed its quality of the optical and cosmetic performance.

Note(2): The optimal Vertical Frame Rate is 59-100Hz for best picture quality

Note(3): Because this module is operated by DE only mode, Hsync and Vsync input signals are ignored.


$F_c = F_r \times T_v \times T_h$, $F_h(\min.) = F_c(\min.) / T_h(\min.)$, $F_h(\text{typ.}) = F_c(\text{typ.}) / T_h(\text{typ.})$, $F_h(\max.) = F_c(\max.) / T_h(\min.)$

Please make sure the range of pixel clock has follow the below equation and Fc, Fr, Tv, Th


not allowed to get beyond the min or max spec.

Max Fc is including spread spectrum.


INPUT SIGNAL TIMING DIAGRAM

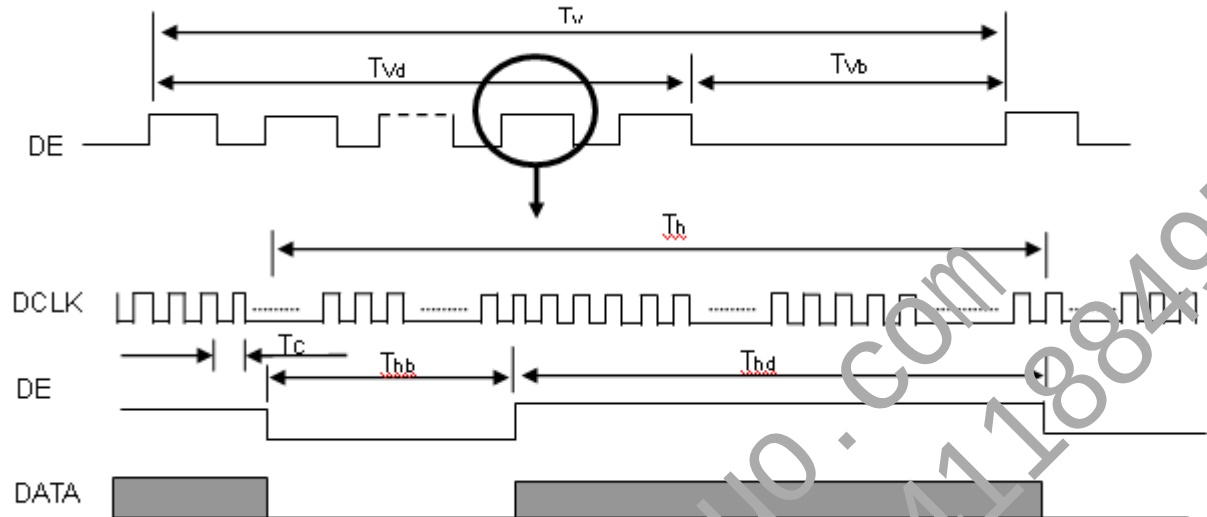


Note (4) The input clock cycle-to-cycle jitter is defined as below figures. $Trcl = T_1 - T_1$

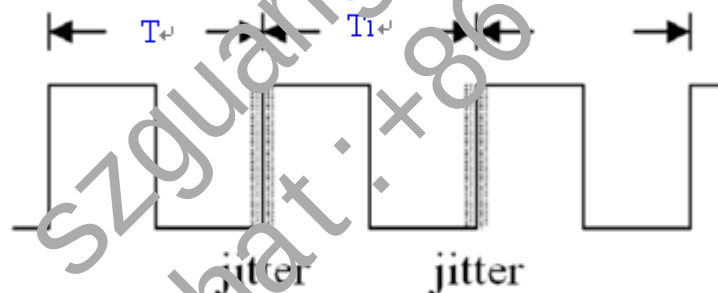

Note (5) Input Clock to data skew is defined as below figures.

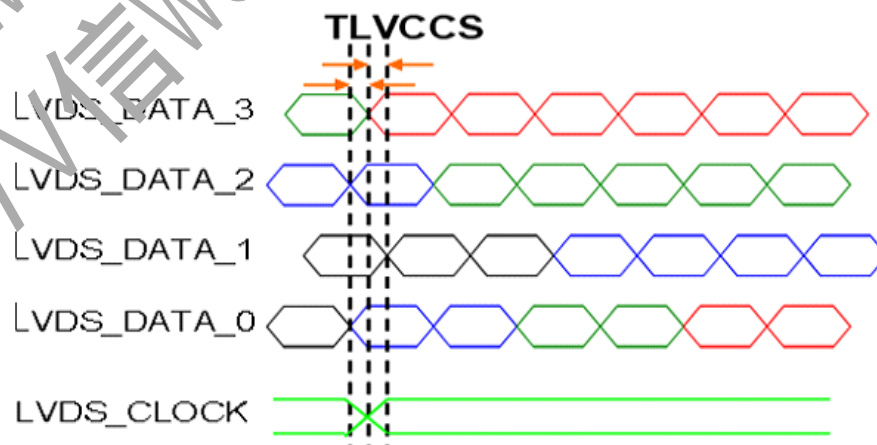


Note (6) The SSCG (Spread spectrum clock generator) is defined as below figures.

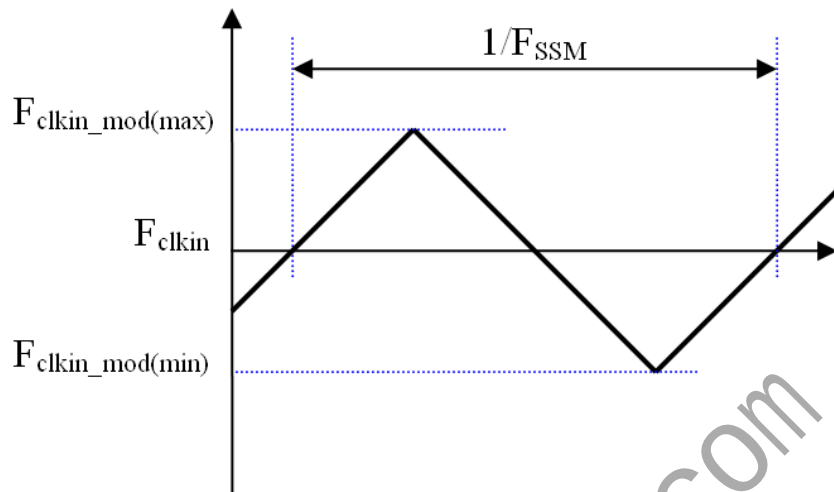

Note (7) The DCLK range at last line of V-blank should be set in 0 to Hdisplay/2

4.6 POWER ON/OFF SEQUENCE

The power sequence specifications are shown as the following table and diagram.

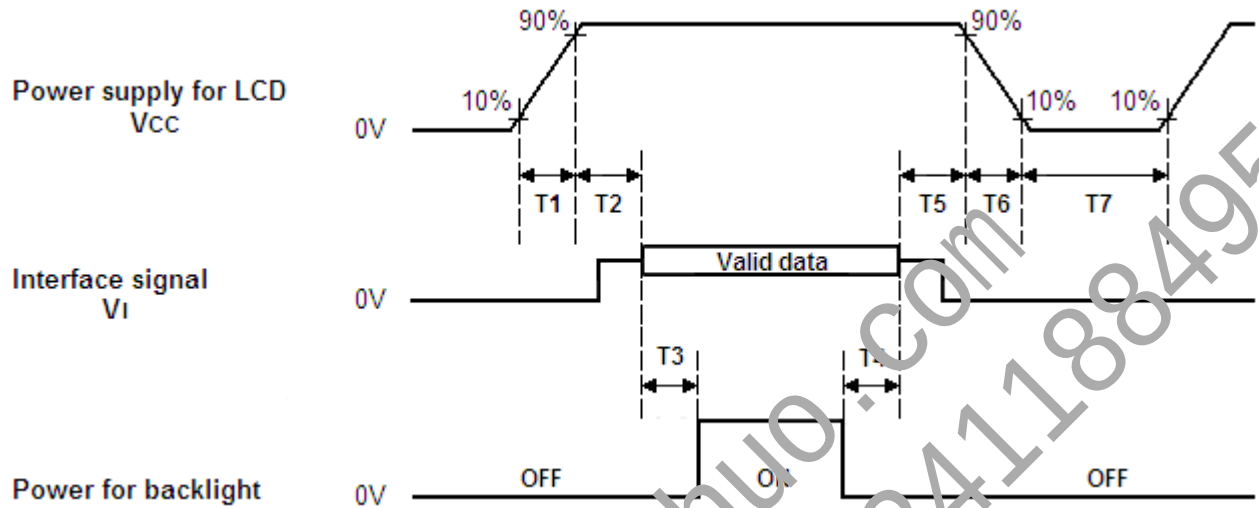

Timing Specifications:

Parameters	Values			Units
	Min	Typ	Max	
T1	0.5	-	10	ms
T2	0	30	50	ms
T3	450	-	-	ms
T4	100	250	-	ms
T5	0	20	50	ms
T6	0.1	-	100	ms
T7	1000	-	-	ms

Note (1) The supply voltage of the external system for the module input should be the same as the definition of Vcc.

Note (2) Please insert a display black pattern during all T4. When the backlight turns on before the LCD operation of the LCD turns off, the display may momentarily become abnormal screen and it will be no reliability concern (T4 < 100ms).

Note (3) In case of VCC off level, please keep the level of input signals on the low or keep a high impedance.

Note (4) T7 should be measured after the module has been fully discharged between power off and on period.

Note (5) Interface signal shall not be kept at high impedance when the power is on.

Note (6) INX won't take any responsibility for the products which are damaged by the customers not following the Power Sequence.

Note (7) There might be slight electronic noise when LCD is turned off (even backlight unit is also off). To avoid this symptom, we suggest "Vcc falling timing" to follow "T6 spec".

5. OPTICAL CHARACTERISTICS

5.1 TEST CONDITIONS


Item	Symbol	Value	Unit
Ambient Temperature	Ta	25±2	°C
Ambient Humidity	Ha	50±10	%RH
Supply Voltage	VCC	5	V
Frame rate	Fr	60	Hz
Input Signal	According to typical value in "3. ELECTRICAL CHARACTERISTICS"		
LED Light Bar Input Current Per Input Pin	I _F	38 ± 1.5	mA
PWM Duty Ratio	D	100	%
LED Light Bar Test Converter	INX R373B-EE-JIG_SMT-FWR		

5.2 OPTICAL SPECIFICATIONS

The relative measurement methods of optical characteristics are shown in 5.2. The following items should be measured under the test conditions described in 5.1 and stable environment shown in Note (7).

Item		Symbol	Condition	Min.	Typ.	Max.	Unit	Note
Color Chromaticity (CIE 1931)	Red	R _x	$\theta_x=0^\circ, \theta_y=0^\circ$ CS-2000 R=G=B=2.55 Gray scale C light	Typ - 0.03	0.651	Typ + 0.03	-	(1), (5),(7)
		R _y			0.331			
	Green	G _x			0.274			
		G _y			0.585			
	Blue	B _x			0.139			
		B _y			0.070			
	White	W _x			0.318			
		W _y			0.353			
Center Transmittance		T%	4.28	4.75		%	(1), (6)	
Contrast Ratio		CR	1050	1500	-	-	(1), (2)	
Response Time		T _{GTG_V/F}	$\theta_x=0^\circ, \theta_y=0^\circ$		14	20	ms	(3)
Gamma		32~128	$\theta_x=0^\circ, \theta_y=0^\circ$	1.9	2.2	2.5		(4)
Viewing Angle	Horizontal	θ_{x+}	CR ≥ 10	80	89	-	Deg.	(1), (5)
		θ_{x-}		80	89	-		
Viewing Angle	Vertical	θ_{y+}		80	89	---		
		θ_{y-}		80	89	---		

Note (1) Definition of Viewing Angle (θ_x , θ_y):

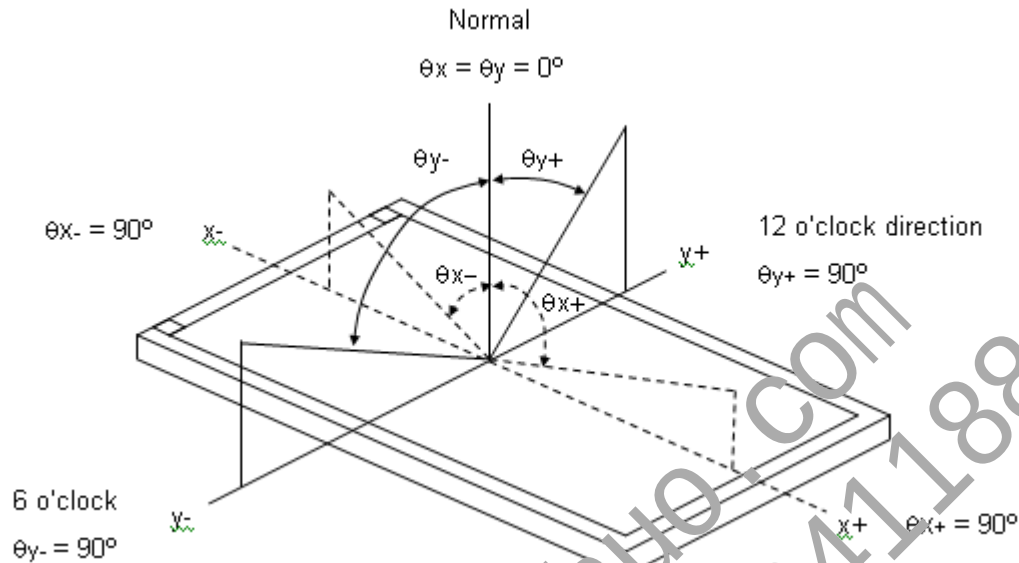

Note (2) Light source is the BLU which supplied by INX and the cell driving voltage are based on suitable gamma voltages. Contrast Ratio (CR) = L_{255} / L_0

L255: Luminance of gray level 255

L 0: Luminance of gray level 0

CR = CR (5)

CR (X) is corresponding to the Contrast Ratio of the point X at Figure in Note (6).

Note (3) Definition of Gray to Gray Switching :

- T_{GTG_AVE} is the total average of the T_{GTG} data (Measured by INX GTG instrument)
- T_{GTG} means the transition time from gray N to gray M. (Measured by TEKTRONIX TDS3054B).
- The gray (N,M) stands for the (0,63,127,191,255) as the following table.

Gray to Gray		Rising time				
		0	63	127	191	255
Falling time	0					
	63					
	127					
	191					
	255					


Note (4) Definition of Gamma:

Gamma is the value of gray level 32~128 at the center point X5 in Note (6).

Note (5) Measurement Setup:

The LCD module should be stabilized at given temperature for 40 minutes to avoid abrupt temperature change during measuring. In order to stabilize the luminance, the measurement should

be executed after lighting Backlight for 40 minutes in a windless room.

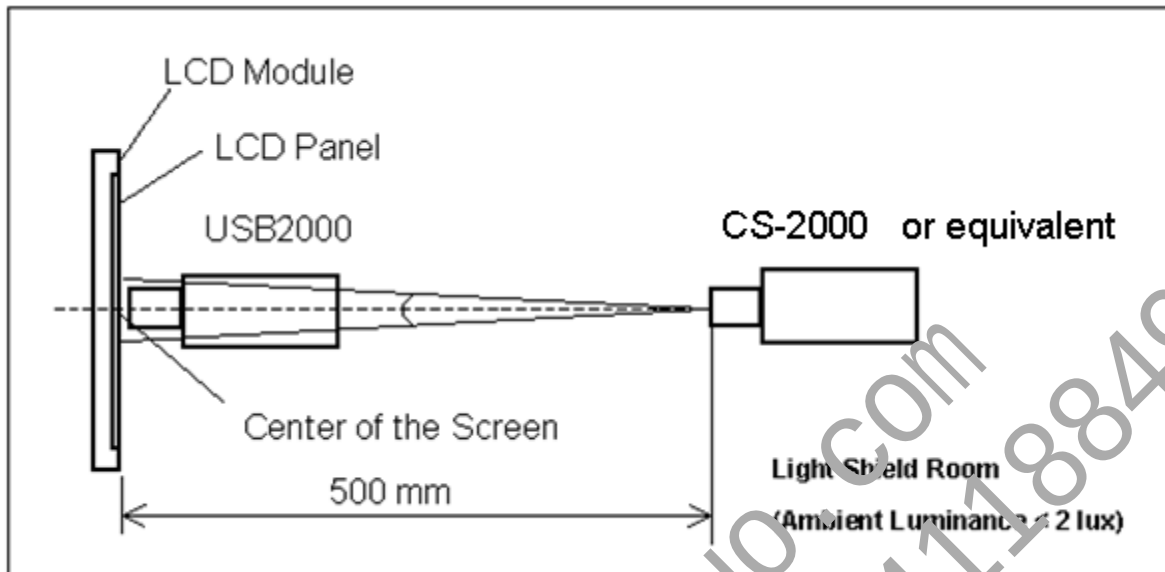


Note (6) Definition of Transmittance (T%):

Measure the transmittance at 9 points.

Light source is the BLU(INX) and the cell driving voltage are based on suitable gamma voltages.

$$T(X) = \frac{L255(5) \text{ of LCD module}}{\text{Luminance (5) of BLU}} \times 100\%$$

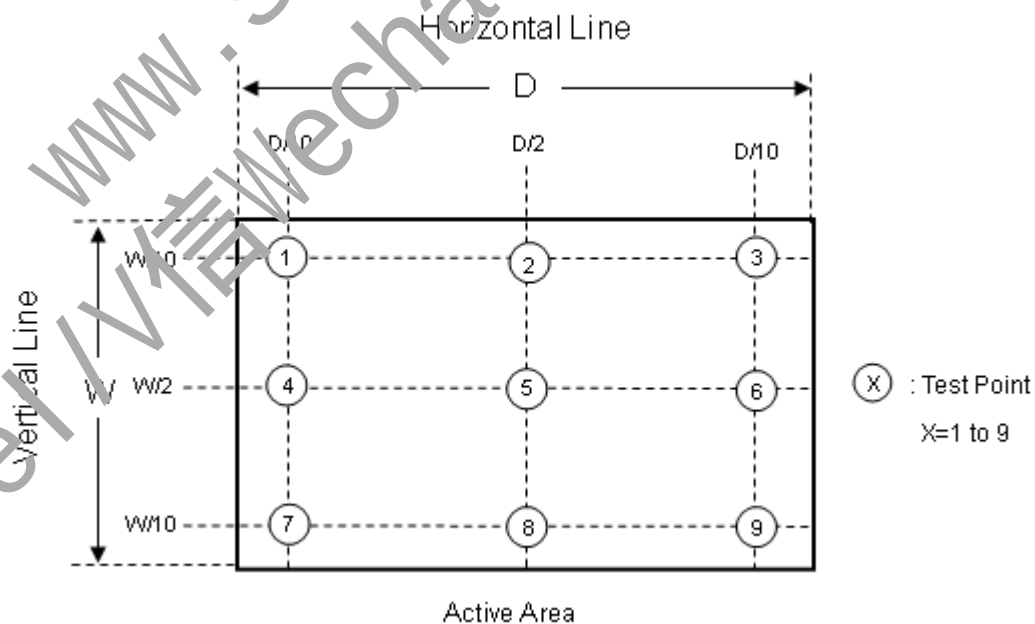

Note (7) Light source is the standard light source "C" which is defined by CIE and driving voltage are based on suitable gamma voltages. The calculating method is as following :

1. Measure Module's and BLU's spectrum at center point. W, R, G, B are with signal input.
BLU is supplied by INX.
2. Calculate cell's spectrum.
3. Calculate cell's chromaticity by using the spectrum of standard light source "C".

www.szguangzhuo.com
Tel / 信 Wechat : +86-13411884959

6. RELIABILITY TEST ITEM


Items	Required Condition	Note
Temperature Humidity Bias (THB)	Ta= 50°C, 80%RH, 240hours	(1),(2)
High Temperature Operation (HTO)	Ta= 50°C, 240hours	
Low Temperature Operation (LTO)	Ta= 0°C, 240hours	
High Temperature Storage (HTS)	Ta= 60°C, 240hours	
Low Temperature Storage (LTS)	Ta= -20°C, 240hours	
Thermal Shock Test (TST)	-20°C/30min, 60°C / 30min, 100 cycles	

Note (1) criteria : Normal display image with no obvious non-uniformity and no line defect.

Note (2) Evaluation should be tested after storage at room temperature for more than two hour

7. LABEL

7.1 INX OPEN CELL LABEL

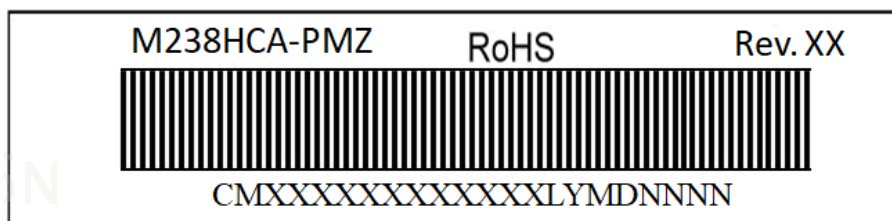

Barcode definition:

Serial ID: CM-XXXXX-X-X-X-XX-L-XX-L-YMD-NNNN

Code	Meaning	Description
CM	Supplier code	INX =CM
N8AMZ	Model number	M238HCA-PMZ=N8AMZ
X	Revision code	C1:1, C2:2, ...
X	Source driver IC code	Century=1, CLL=2, Demot=3, Epson=4, Fujitsu=5, Himax=6, Hitachi=7, Hynix=8, LDI=9, Matsushita=A, NEC=B, Novatek=C, OKI=D, Philips=E, Renesas=F, Samsung=G, Sanyo=H, Sharp=I, TI=J, Topro=K, Toshiba=L, Windbond=M, UNITEK=Q, Fiti=Y, None IC=Z
X	Gate driver IC code	
XX	Cell location	Tainan, Taiwan=TN Ningbo China=CN, Hsinchu Taiwan=SC
L	Cell line #	1,2,~,9 A,B,~,Y,Z
XX	Module location	Tainan, Taiwan=TN ; Ningbo China=NP, Shenzhen China=SH, Foshan China=NH
L	Module line #	1,2,~,9 A,B,~,Y,Z
YMD	Year, month, day	Year: 2001=1, 2002=2, 2003=3, 2004=4... Month: 1~12=1, 2, 3, ~, 9, A, B, C Day: 1~31= 1, 2, 3, ~, 9, A, B, C, ~, T, U, V
NNNN	Serial number	Manufacturing sequence of product


8. PACKING

8.1 PACKING SPECIFICATIONS

- (1) 28 lcd Panels / 1 Box
- (2) Box dimensions : 630 (L) X473 (W) X143 (H)mm
- (3) Weight : approximately 15.8 Kg (28 panels per box)
- (4) 896 lcd TV Panels / 1 Group
- (5) Group dimensions : 1300 (L) X 1000 (W) X1257 (H)mm
- (6) Weight : approximately 530 Kg / 1 Group

8.2 PACKING METHOD

- (1) Packing Method (EPS Box)

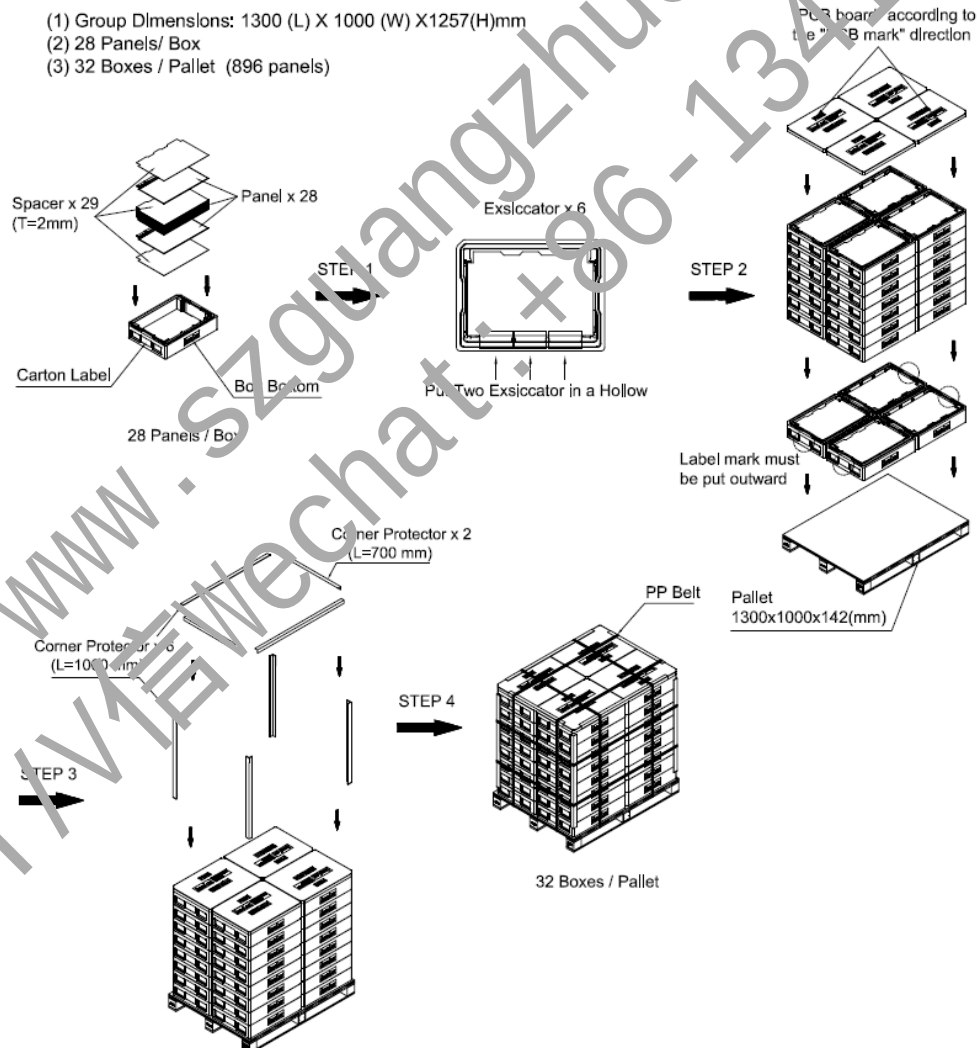

(2) Shipping Mode


A TYPE (Air Transportation)

Full Stack



32 Boxes / Pallet

Non-Full Stack



Corner Paper x 4

B TYPE (Sea&Land Transportation)


Sea&Land Transportation
(40ft HQ Container)

32 Boxes / Pallet + 32 Boxes / Pallet


Sea&Land Transportation
(40ft Container)

24 Boxes / Pallet + 32 Boxes / Pallet

C TYPE (Sea&Land Transportation)

Sea&Land Transportation
(40ft HQ Container)

32 Boxes / Pallet + 32 Boxes / Pallet


Sea&Land Transportation
(40ft Container)

24 Boxes / Pallet + 32 Boxes / Pallet

40ft HQ Container & 40ft Container


Container Head

Container tail



8.3 UN-PACKAGING METHOD

Un-packaging method is shown as following figures.

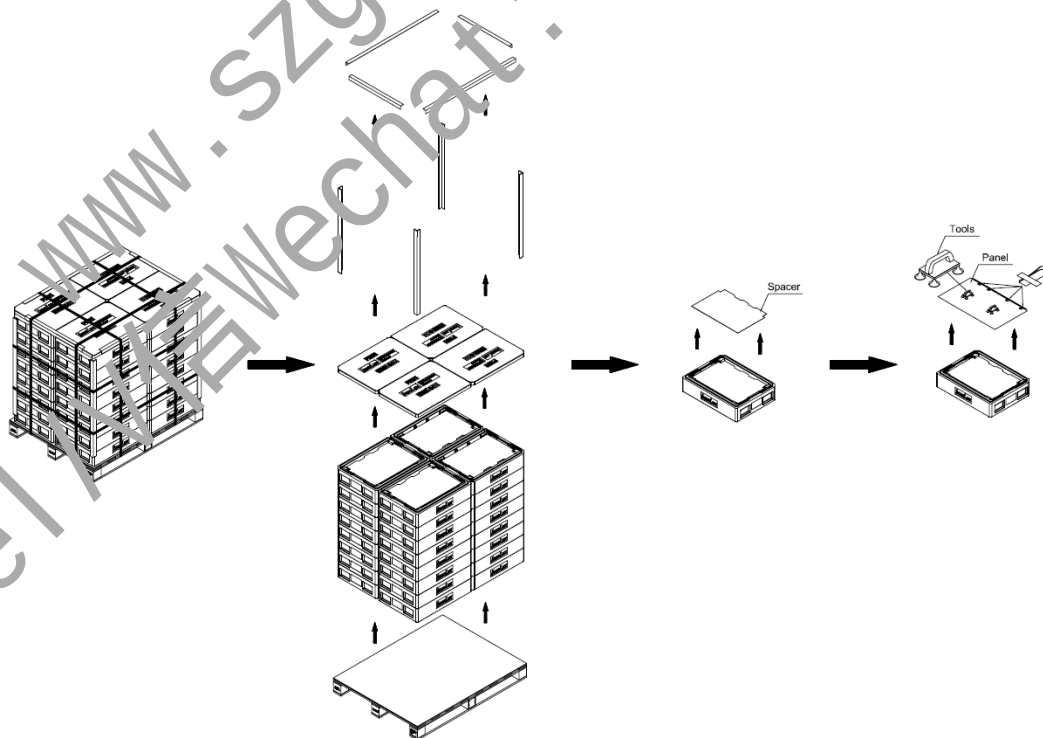

9. PRECAUTION

9.1 ASSEMBLY AND HANDLING PRECAUTIONS

- (1) Do not apply improper or unbalanced force such as bending or twisting to open cells during assembly.
- (2) It is recommended to assemble or to install an open cell into a customer's product in clean working areas. The dust and oil may cause electrical short to an open cell or worsen polarizers on an open cell.
- (3) Do not apply pressure or impulse to an open cell to prevent the damage.
- (4) Always follow the correct power-on sequence when an open cell is assembled and turned on. This can prevent the damage and latch-up of the CMOS chips.
- (5) Do not design sharp-pointed structure / parting line / tooling gate on the plastic part of a COF (Chip on film), because the burr will scrape the COF.
- (6) If COF would be bended in assemble process, do not place IC on the bending corner.
- (7) The gap between COF IC and any structure of BLU must be bigger than 2 mm. This can prevent the damage of COF IC.
- (8) The bezel opening must have no burr and be smooth to prevent the surface of an open cell scraped.
- (9) The bezel of a module or a TV set can not contact with force on the surface of an open cell. It might cause light leakage or scrape.
- (10) In the case of no FFC or FPC attached with open cells, customers can refer the FFC / FPC drawing and buy them by self.
- (11) It is important to keep enough clearance between customers' front bezel/backlight and an open cell. Without enough clearance, the unexpected force during module assembly procedure may damage an open cell.
- (12) Do not plug in or unplug an I/F (interface) connector while an assembled open cell is in operation.
- (13) Use a soft dry cloth without chemicals for cleaning, because the surface of the polarizer is very soft and easily scratched.
- (14) Moisture can easily penetrate into an open cell and may cause the damage during operation.
- (15) When storing open cells as spares for a long time, the following precaution is necessary.
 - (15.1) Do not leave open cells in high temperature and high humidity for a long time. It is highly recommended to store open cells in the temperature range from 0 to 35°C at normal humidity without condensation.
 - (15.2) Open cells shall be stored in dark place. Do not store open cells in direct sunlight or fluorescent light environment.
- (16) When ambient temperature is lower than 10°C, the display quality might be reduced.
- (17) Unpacking (Cartons/Tray plates) in order to prevent open cells broken:
 - (17.1) Moving tray plates by one operator may cause tray plates bent which may induce open cells broken. Two operators carry one carton with their two hands. Do not throw cartons/tray plates, avoid any impact on cartons/tray plates, and put down & pile cartons/tray plates gently.

(17.2) A tray plate handled with unbalanced force may cause an open cell damaged. Trays should be completely put on a flat platform.

(17.3) To prevent open cells broken, tray plates should be moved one by one from a plastic bag.

(17.4) Please follow the packing design instruction, such as the maximum number of tray stacking to prevent the deformation of tray plates which may cause open cells broken.

(17.5) To prevent an open cell broken or a COF damaged on a tray, please follow the instructions below:

(17.5.1) Do not peel a polarizer protection film of an open cell off on a tray

(17.5.2) Do not install FFC or LVDS cables of an open cell on a tray

(17.5.3) Do not press the surface of an open cell on a tray.

(17.5.4) Do not pull X-board when an open cell placed on a tray.

(18) Unpacking (Hard Box) in order to prevent open cells broken:

(18.1) Moving hard boxes by one operator may cause hard boxes fell down and open cells broken by abnormal methods. Two operators carry one hard box with their two hands. Do handle hard boxes carefully, such as avoiding impact, putting down, and piling up gently.

(18.2) To prevent hard boxes sliding from carts and falling down, hard boxes should be placed on a surface with resistance.

(18.3) To prevent an open cell broken or a COF damaged in a hard box, please follow the instructions below:

(18.3.1) Do not peel a polarizer protection film of an open cell off in a hard box.

(18.3.2) Do not install FFC or LVDS cables of an open cell in a hard box.

(18.3.3) Do not press the surface of an open cell in a hard box.

(18.3.4) Do not pull X-board when an open cell placed in a hard box.

(19) Handling – In order to prevent open cells, COFs, and components damaged:

(19.1) The forced displacement between open cells and X-board may cause a COF damaged. Use a fixture tool for handling an open cell to avoid X-board vibrating and interfering with other components on a PCBA & a COF.

(19.2) To prevent open cells and COFs damaged by taking out from hard boxes, using vacuum jigs to take out open cells horizontally is recommended.

(19.3) Improper installation procedure may cause COFs of an open cell over bent which causes damages. As installing an open cell on a backlight or a test jig, place the bottom side of the open cell first on the backlight or the test jig and make sure no interference before fitting the open cell into the backlight/the test jig.

(19.4) Handle open cells one by one.

(20) Avoid any metal or conductive material to contact PCB components, because it could cause electrical damage or defect.

(21) Do not apply improper or unbalanced force such as bending or twisting to open cells during assembly.

(22) It is recommended to assemble or to install an open cell into a customer's product in clean working areas. The dust and oil may cause electrical short to an open cell or worsen polarizers on an open cell.

- (23) Do not apply pressure or impulse to an open cell to prevent the damage.
- (24) Always follow the correct power-on sequence when an open cell is assembled and turned on. This can prevent the damage and latch-up of the CMOS chips.
- (25) Do not design sharp-pointed structure / parting line / tooling gate on the plastic part of a COF (Chip on film), because the burr will scrape the COF.
- (26) If COF would be bended in assemble process, do not place IC on the bending corner.
- (27) The gap between COF IC and any structure of BLU must be bigger than 2 mm. This can prevent the damage of COF IC.
- (28) The bezel opening must have no burr and be smooth to prevent the surface of an open cell scraped.
- (29) The bezel of a module or a TV set can not contact with force on the surface of an open cell. It might cause light leakage or scrape.
- (30) In the case of no FFC or FPC attached with open cells, customers can refer the FFC / FPC drawing and buy them by self.
- (31) It is important to keep enough clearance between customers' front bezel/backlight and an open cell. Without enough clearance, the unexpected force during module assembly procedure may damage an open cell.
- (32) Do not plug in or unplug an I/F (interface) connector while an assembled open cell is in operation.
- (33) Use a soft dry cloth without chemicals for cleaning, because the surface of the polarizer is very soft and easily scratched.
- (34) Moisture can easily penetrate into an open cell and may cause the damage during operation.
- (35) When storing open cells as spares for a long time, the following precaution is necessary.
- (35.1) Do not leave open cells in high temperature and high humidity for a long time. It is highly recommended to store open cells in the temperature range from 0 to 35°C at normal humidity without condensation.
- (35.2) Open cells shall be stored in dark place. Do not store open cells in direct sunlight or fluorescent light environment.
- (36) When ambient temperature is lower than 10°C, the display quality might be reduced.
- (37) Unpacking (Cartons/Tray plates) in order to prevent open cells broken:
- (37.1) Moving tray plates by one operator may cause tray plates bent which may induce open cells broken. Two operators carry one carton with their two hands. Do not throw cartons/tray plates, avoid any impact on cartons/tray plates, and put down & pile cartons/tray plates gently.
- (37.2) A tray plate handled with unbalanced force may cause an open cell damaged. Trays should be completely put on a flat platform.
- (37.3) To prevent open cells broken, tray plates should be moved one by one from a plastic bag.
- (37.4) Please follow the packing design instruction, such as the maximum number of tray stacking to prevent the deformation of tray plates which may cause open cells broken.
- (37.5) To prevent an open cell broken or a COF damaged on a tray, please follow the instructions below:

(37.5.1) Do not peel a polarizer protection film of an open cell off on a tray

(37.5.2) Do not install FFC or LVDS cables of an open cell on a tray

(37.5.3) Do not press the surface of an open cell on a tray.

(37.5.4) Do not pull X-board when an open cell placed on a tray.

(38) Unpacking (Hard Box) in order to prevent open cells broken:

(38.1) Moving hard boxes by one operator may cause hard boxes fell down and open cells broken by abnormal methods. Two operators carry one hard box with their two hands. Do handle hard boxes carefully, such as avoiding impact, putting down, and piling up gently.

(38.2) To prevent hard boxes sliding from carts and falling down, hard boxes should be placed on a surface with resistance.

(38.3) To prevent an open cell broken or a COF damaged in a hard box, please follow the instructions below:

(38.3.1) Do not peel a polarizer protection film of an open cell off in a hard box.

(38.3.2) Do not install FFC or LVDS cables of an open cell in a hard box.

(38.3.3) Do not press the surface of an open cell in a hard box.

(38.3.4) Do not pull X-board when an open cell placed in a hard box.

(39) Handling – In order to prevent open cells, COFs, and components damaged:

(39.1) The forced displacement between open cells and X-board may cause a COF damaged. Use a fixture tool for handling an open cell to avoid X-board vibrating and interfering with other components on a PCBA & a COF.

(39.2) To prevent open cells and COFs damaged by taking out from hard boxes, using vacuum jigs to take out open cells horizontally is recommended.

(39.3) Improper installation procedure may cause COFs of an open cell over bent which causes damages. As installing an open cell on a backlight or a test jig, place the bottom side of the open cell first on the backlight or the test jig and make sure no interference before fitting the open cell into the backlight/the test jig.

(39.4) Handle open cells one by one.

(40) Avoid any metal or conductive material to contact PCB components, because it could cause electrical damage or defect.

9.2 SAFETY PRECAUTIONS

(1) If the liquid crystal material leaks from the open cell, it should be kept away from the eyes or mouth. In case of contact with hands, skin or clothes, it has to be washed away thoroughly with soap.

(2) After the end of life, open cells are not harmful in case of normal operation and storage.

9.3 ASSEMBLY AND HANDLING PRECAUTIONS

(1) One operator move hard boxes may falling down by abnormal method makes panel broken. Two operators to carry hard boxes with their two hands. Do not throw hard box carelessly, avoid any impact, and put down & pile hard box gently.

- (2) To prevent hard boxes falling down via sliding on carts. Hard box should be put on a surface which won't make hard box slide easily.

9.4 HANDLING – IN ORDER TO PREVENT PANEL BROKEN, COF AND COMPONENT DAMAGED

- (1) The displacement between panel and X-board may cause COF damaged. As handling panel, suggest using tools to avoid X-Board vibrating, and do not interfere with any component on PCBA & COF.
- (2) To prevent panel and COF damaged by taking out from hard boxes. Using vacuum jigs to handle panels, and take out panels horizontally.
- (3) Abnormal operating procedure will make COF over bending induce product defect. As setting panels to the test jig / backlight, put the panel with the bottom side first, and avoid neddling on nea side.

9.5 STORAGE PRECAUTIONS

- (1) Do not leave the O/C in high temperature, and high humidity for a long time. It is highly recommended to store the module with temperature from 20°C to 30°C and relative humidity between 40% to 60%.
- (2) Do not store the O/C in direct sunlight
- (3) The O/C should be stored in dark place. It is prohibited to apply sunlight or fluorescent light in storing
- (4) Store them in a dark place. Do not expose the module to sunlight or fluorescent light. Products should not be placed on the floor, but on the Pallet away from a wall. Prevent products from direct sunlight, moisture nor water; be cautious of a buildup of condensation. Keep the temperature at 25±5 °C and humidity 50+-10%RH, if under this condition, storage life time is below 6months. We still suggest customer can manage first in first out, and arrange production as fast as possible within 6months period.

9.6 OPERATION PRECAUTIONS

- (1) The LCD product should be operated under normal condition.
Normal condition is defined as below:
Temperature : 20±15°C
Humidity: 65±20%
Display pattern : continually changing pattern(Not stationary)
- (2) If the product will be used in extreme conditions such as high temperature, high humidity, high altitude ,display pattern or operation time etc...It is strongly recommended to contact INX for application engineering advice . Otherwise , Its reliability and function may not be guaranteed.

9.7 OTHER

When fixed patterns are displayed for a long time, remnant image is likely to occur.

Appendix. OUTLINE DRAWING

① PPM DIMENSION	② CONTROL DIMENSION	DATE 2014/06/15	SCALE 1:1	UNIT mm	
APPROVED	MF Hsieh	PART NUMBER or P.C. NUMBER DN2734595			
CHECKED	Wenhung Lee	PART DESCRIPTION outline of M238HCA-PM2			
DESIGNED	Yichen Yang	