

NV156FHM-T04

Product Specification

Rev. P1

BOE Optoelectronics Technology Co., Ltd

SPEC. NUMBER

PRODUCT GROUP

Rev.

ISSUE DATE

PAGE

www.szguangzhuo.com 广卓液晶屏 echodeng61@hotmail.com jimej@jimeihk.com +86-13411884959
TFT-LCD P1 2019.05.06 1 OF 37

BOE	www.szguangzhuo.com 广卓液晶屏 echodeng61@hotmail.com jimei@jimeihk.com +86-13411884959	PRODUCT GROUP	REV	ISSUE DATE
		Customer Spec	Rev. P1	2019.05.06

REVISION HISTORY

Revision No.	Page	Description of Changes	Date	Prepared
P0	-	Final spec	2019.04.09	Jin Zhong
P1	6	Add Touch FW	2019.05.06	Luo Zhongli

REVIEWED	
Designer	Manager
Gao Kunkun(Array)	Huang Zhonghao
Pan Ruiqi (Cell)	Hu Jingyong
Qiao Zonghua (CF)	Li Min
Luo Zhongli(EE)	Zuo Cheng
Liu Song(MO)	Gao Liang
Mou Binkai(QE)	Huang Yuan
Tang Taoliang(P)	Tang Xiuzhu
APPROVED	
Jin Zhong(PM)	

SPEC. NUMBER	SPEC. TITLE	PAGE
www.szguangzhuo.com 广卓液晶屏 echodeng61@hotmail.com jimei@jimeihk.com +86-13411884959	NV156FHM-T04 Product Specification Rev. P1	2 OF 37

Contents

No.	Items	Page
1.0	General Description	4
2.0	Absolute Maximum Ratings	8
3.0	Electrical Specifications	12
4.0	Optical Specifications	17
5.0	Interface Connection	21
6.0	Signal Timing Specification	23
7.0	Input Signals, Display Colors & Gray Scale of Colors	24
8.0	Power Sequence	26
9.0	Connector Description	27
10.0	Mechanical Characteristics	28
11.0	Reliability Test	28
12.0	Handling & Cautions	29
13.0	Label	31
14.0	Packing Information	32
15.0	Mechanical Outline Dimension	34
16.0	EDID Table	35

1.0 GENERAL DESCRIPTION

1.1 Introduction

NV156FHM-T04 is a color active matrix TFT LCD module using amorphous silicon TFT's (Thin Film Transistors) as an active switching devices. This module has a 15.6 inch diagonally measured active area with Full-HD resolutions (1920 horizontal by 1080 vertical pixel array). Each pixel is divided into RED, GREEN, BLUE dots which are arranged in vertical stripe and this module can display 262k (6bit) colors and color gamut 45%. The TFT-LCD panel used for this module is a low reflection and higher color type. Therefore, this module is suitable for Notebook PC. The LED driver for back-light driving is built in this model.

All input signals are eDP1.2 interface compatible.

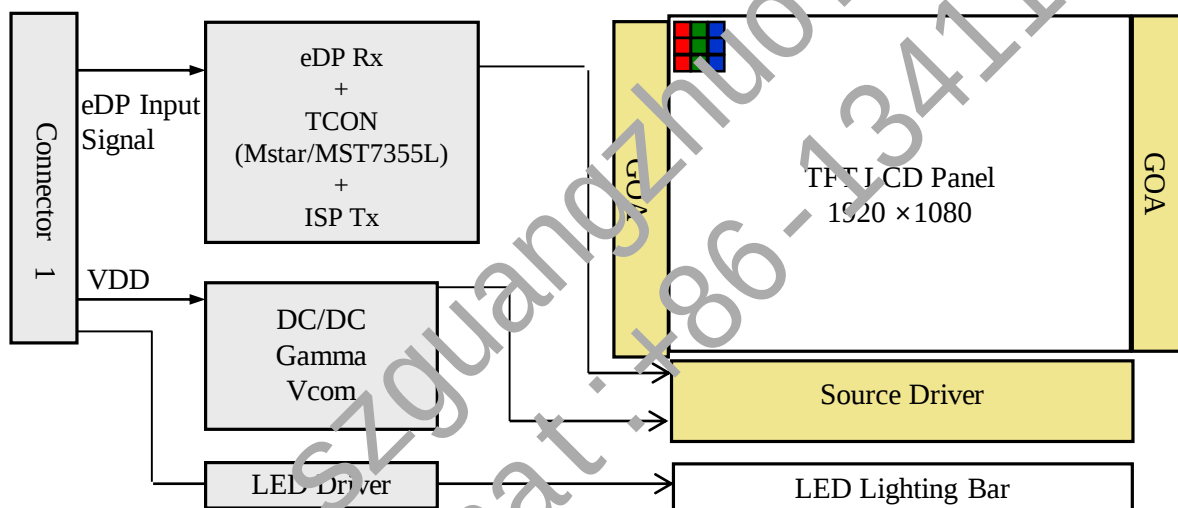


Figure 1. Drive Architecture

1.2 Features

- 2 lane eDP interface with 2.7Gbps link rates
- Thin and light weight
- 262k(6bit) color depth, color gamut 45%
- Single LED lighting bar (Bottom side/Horizontal Direction)
- Data enable signal mode
- Side mounting frame
- Green product (RoHS & Halogen free product)
- On board LED driving circuit
- Low driving voltage and low power consumption
- On board EDID chip

1.3 Application

- Notebook PC (Wide type)

1.4 General Specification

The followings are general specifications at the model NV156FHM-T04. (listed in Table 1)

<Table 1. General Specifications>

Parameter	Specification	Unit	Remarks
Active area	344.16(H) × 193.59(V)	mm	
Number of pixels	1920 (H) × 1080 (V)	pixels	
Pixel pitch	179.25(H) × 179.25(V)	um	
Pixel arrangement	RGB Vertical stripe		
Display colors	262k(6bit)		
Color gamut	45%		
Display mode	Normally black		
Dimensional outline	350.66(H) × 216.15(V) (W/PCB) × 3.18max(panel side) 3.38max(PCBA side)	mm	
Weight	385 (max)	g	
Surface treatment	AG		
Surface hardness	3H		
Back-light	Bottom edge side, 1-LED lighting bar type		Note 1
Power consumption	P _D : 0.9	W	@Mosaic
	P _{BL} : 3.6	W	
	P _{Total} : 4.5	W	@Mosaic

Notes : 1. LED Lighting Bar (40*LED Array)

Customer Spec

Rev. P1

2019.05.06

1.2.2.General Touch Specification(Table 2.)

<Table 2. General Touch Specifications>

Parameter	Specification	Unit	Remarks
Type of Touch Sensor	Self Capacitance		
Touch Structure	On Cell		
Panel Size	15.6"		
Outline Dimension	N/A(Cover Lens Free)	mm	
TP View Area	N/A(Cover Lens Free)	mm	
TP Active Area	X 345.96 × Y 193.74 (AA)	mm	
Total Thickness	N/A(Cover Lens Free)	mm	
Interface	I2C		
Report Rate	Follow win8/10 ≥ 100	Hz	
Multi-Touch Point	10 points		
Input method	Finger		
Touch panel sensor IC	G7500		G2 Touch
Channel	1500		
Surface treatment	AG		
Surface Hardness	3	H	
Support OS	Win8.x and Win10 compliant		
TP Power Consumption	0.2max.	W	@ 5 finger
Touch FW Version	R00.11.13260		

2.0 ABSOLUTE MAXIMUM RATINGS

The followings are maximum values which, if exceed, may cause faulty operation or damage to the unit. The operational and non-operational maximum voltage and current values are listed in Table 2.

< Table 2. Absolute Maximum Ratings >

$T_a = 25 \pm 2^\circ\text{C}$

Parameter	Symbol	Min.	Max.	Unit	Remarks
Power Supply Voltage	V_{DD}	-0.3	4.0	V	Note 1
Logic Supply Voltage	V_{IN}	$V_{SS}-0.3$	$V_{DD}+0.3$	V	
Operating Temperature	T_{OP}	0	+70	$^\circ\text{C}$	Note 2
Storage Temperature	T_{ST}	-20	+60	$^\circ\text{C}$	

Notes :

1. Permanent damage to the device may occur if maximum values are exceeded functional operation should be restricted to the condition described under normal operating conditions.

2. Temperature and relative humidity range are shown in the figure below.

95 % RH Max. ($40^\circ\text{C} \geq T_a$) Maximum wet - bulb temperature at 39°C or less. ($T_a > 40^\circ\text{C}$) No condensation.

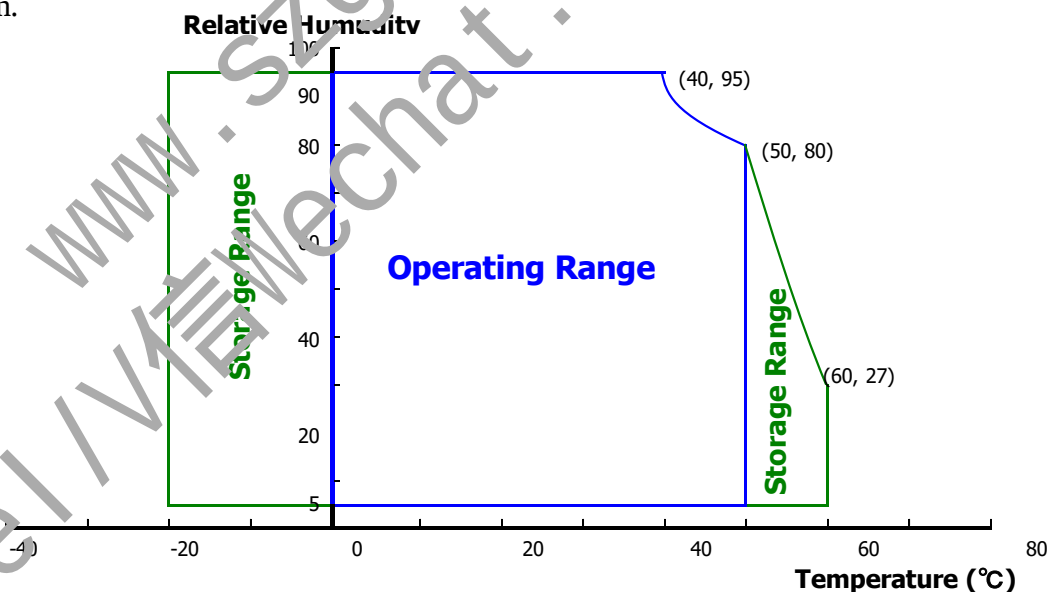


Figure 2. Temperature and Relative Humidity Range

3.0 ELECTRICAL SPECIFICATIONS

3.1 Electrical Specifications

< Table 3. Electrical Specifications >

Ta=25+/-2°C

Parameter		Min.	Typ.	Max.	Unit	Remarks
Power Supply Voltage	V _{DD}	3.0	3.3	3.6	V	Note 1
Permissible Input Ripple Voltage	V _{RF}	-10%*V _{DD}	-	+ 10%*V _{DD}	mV	Note4
BIST Control Level	High Level	2	-	3.6	V	-
	Low Level	0	-	0.8	V	-
Power Supply Current	I _{DD}	-	273	485	mA	Note 1
Power Supply Inrush Current	Inrush	-	-	1.5	A	Note3
Power Consumption	P _D	-	0.9	1.6	W	Note 1
	P _{PL}	-	-	3.6	W	Note 2
	P _{total}	-	-	5.2	W	Note1

Notes :

- The supply voltage is measured and specified at the interface connector of LCM.
The current draw and power consumption specified is for 3.3V at 25 °C.

- Typ : Mosaic pattern 8*8
- Max : R/G/B patterns



(a)



(b)

Figure 3. Power Measure Patterns

- Calculated value for reference (V_{LED} × I_{LED})
- Measure condition (Figure 4)
- Input voltage range: 3.0~3.6V. Test condition :Oscilloscope bandwidth 20MHz , Ac coupling

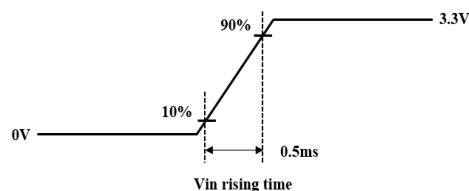


Figure 4. Inrush Measure Condition

3.1.2 Touch Electrical Specifications

< Table 5. Electrical specifications >

Parameter			Min.	Typ.	Max.	Unit	Remarks
Power Supply Voltage		V _{DD}	3.0	3.3	3.6	V	Note1
Permissible Input Ripple Voltage		V _{RF}	-	-	100	mV	At V _{DD} = 3.3V
Power Supply Current		I _{DD}	-	-	61	mA	
Power Consumption	Active Mode	P _T	-	-	0.2	W	Note1
	Idle Mode		-	-	0.1	W	Note2
TP_EN	High Level		0.7*VDDIO	-	-	V	Note3
	Low Level				0.3*VDDIO	V	

- Notes : 1. The supply voltage is measured and specified at the interface connector of TLCM
The current draw and power consumption specified is for 3.3V at 25°C when touch function is active;
2. The supply voltage is measured and specified at the interface connector of TLCM
The current draw and power consumption specified is for 3.3V at 25°C when touch function is Idle;
3. Condition: $1.62V < V_{DDIO} < 3.6V$;

3.2 Backlight Unit

< Table 4. LED Driving Guideline Specifications > Ta=25+/-2°C

Parameter		Min.	Typ.	Max.	Unit	Remarks	
LED Forward Voltage		V _F	-	-	3.0	V	-
LED Forward Current		I _F	-	23.4	-	mA	
LED Power Consumption		P _{LED}	-	-	3.6	W	Note 1
LED Life-Time		N/A	15,000	-	-	Hour	I _F = 23.4mA
Power Supply Voltage for LED Driver		V _{LED}	5	12	21	V	-
Power Supply Voltage for LED Driver Inrush		I _{led inrush}	-	-	1.5	A	Note 4
EN Control Level	Backlight On		2.5	-	5.0	V	-
	Backlight Off		0	-	0.6	V	-
PWM Control Level	High Level		2.5	-	5.0	V	-
	Low Level		0	-	0.6	V	-
PWM Control Frequency		F _{PWM}	200	-	2000	Hz	-
Duty Ratio			5	-	100	%	Note 3

Notes :

- Power supply voltage 12V for LED driver.

Calculator value for reference $I_F \times V_F \times 40 / \text{driver efficiency} = P_{LED}$
- The LED life-time define as the estimated time to 50% degradation of initial luminous.
- 1% duty cycle is achievable with a dimming frequency less than 1KHz.
- Measure condition (Figure 5)

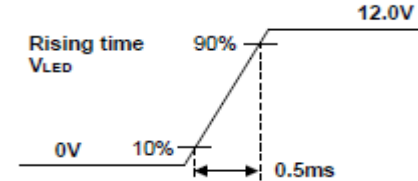


Figure 5. Inrush Measure Condition

BOE	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	Rev. P1	2019.05.06

3.3 LED Structure

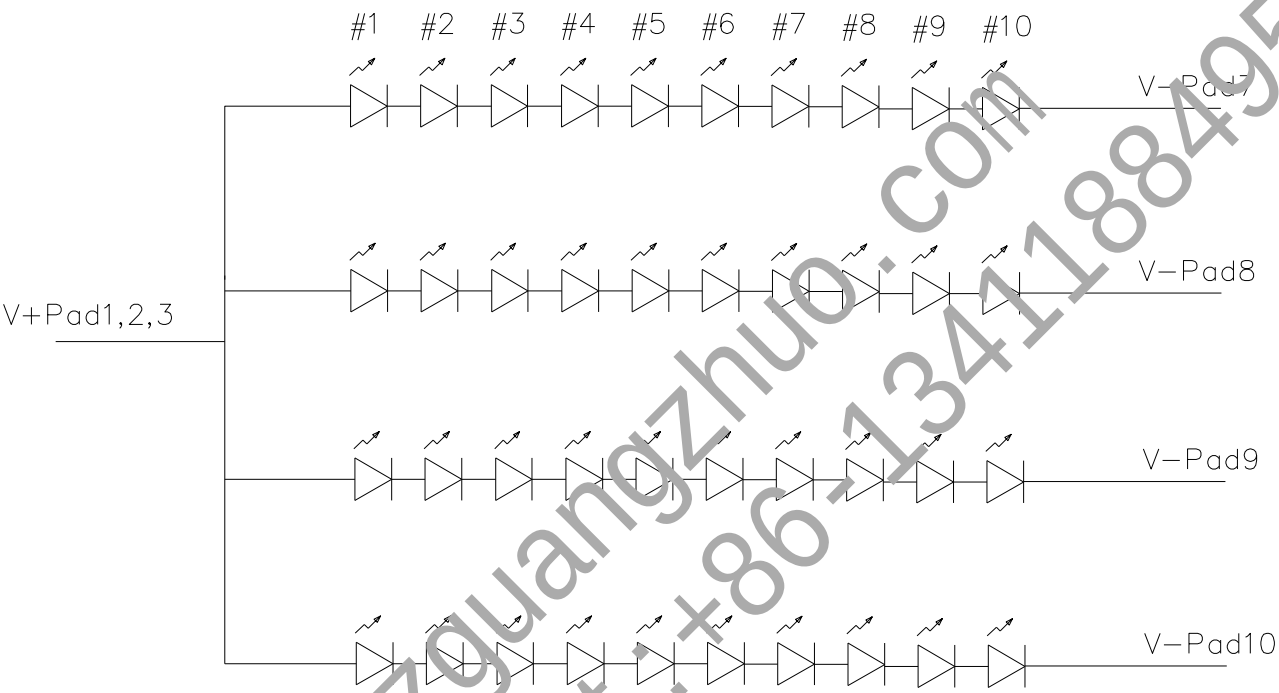


Figure 6. LED Structure

SPEC. NUMBER	SPEC. TITLE	PAGE
www.szguangzhuo.com 广卓液晶屏 echodeng61@hotmail.com jimei@jimeihk.com +86-13411884959	NV156FHM-T04 Product Specification Rev. P1	11 of 37

4.0 OPTICAL SPECIFICATION

4.1 Overview

The test of optical specifications shall be measured in a dark room (ambient luminance ≤ 1 lux and temperature = 25±2°C) with the equipment of luminance meter system (PR730&PR810) and test unit shall be located at an approximate distance 50cm from the LCD surface at a viewing angle of θ and Ø equal to 0°. We refer to θ0=0 (=03) as the 3 o'clock direction (the “right”), θ0=90 (=012) as the 12 o'clock direction (“upward”), θ0=180 (=09) as the 9 o'clock direction (“left”) and θ0=270(=06) as the 6 o'clock direction (“bottom”). While scanning θand/or Ø, the center of the measuring spot on the display surface shall stay fixed. The backlight should be operating for 30 minutes prior to measurement. VDD shall be 3.3+/- 0.3V at 25°C. Optimum viewing angle direction is 6 o'clock.

4.2 Optical Specifications

<Table 5. Optical Specifications>

Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit	Remark
Viewing Angle Range	Horizontal	Θ_3	$CR = 10$	80	85	-	Deg.	Note 1
		Θ_9		80	85	-	Deg.	
	Vertical	Θ_{12}		80	85	-	Deg.	
		Θ_6		80	85	-	Deg.	
Luminance Contrast Ratio		CR	$\Theta = 0^\circ$	600	800	-		Note 2
Luminance of White	5 Points	Y	$\Theta = 0^\circ$ $I_{LED} = 27.4mA$	212.5	250	-	cd/m ²	Note 3
White Luminance Uniformity	5 Points	$\Delta Y5$		80	-	-	%	Note 4
	13 Points	$\Delta Y13$		62.5	-	-	%	
White Chromaticity		W_x	$\Theta = 0^\circ$	0.283	0.313	0.343	-	Note 5
		W_y		0.299	0.329	0.359	-	
Reproduction of Color	Red	R_x	$\Theta = 0^\circ$	-0.03	0.590	+0.03	-	-
		R_y			0.350		-	-
	Green	G_x			0.330		-	-
		G_y			0.555		-	-
	Blue	B_x			0.153		-	-
		B_y			0.119		-	-
Color Gamut		-	-	-	45	-	%	-
Response Time (Rising + Falling)		T _{RT}	Ta= 25°C $\Theta = 0^\circ$	-	16	20	ms	Note 6
Cross Talk		CT	$\Theta = 0^\circ$	-	-	2.0	%	Note 7


Notes :

1. Viewing angle is the angle at which the contrast ratio is greater than 10. The viewing angles are determined for the horizontal or 3, 9 o'clock direction and the vertical or 6, 12 o'clock direction with respect to the optical axis which is normal to the LCD surface (see Figure 7).
2. Contrast measurements shall be made at viewing angle of $\Theta = 0$ and at the center of the LCD surface. Luminance shall be measured with all pixels in the view field set first to white, then to the dark (black) state . (see Figure 7) Luminance Contrast Ratio (CR) is defined mathematically.

$$CR = \frac{\text{Luminance when displaying a white raster}}{\text{Luminance when displaying a black raster}}$$

3. Center Luminance of white is defined as luminance values of 5 point average across the LCD surface. Luminance shall be measured with all pixels in the view field set first to white. This measurement shall be taken at the locations shown in Figure 8 for a total of the measurements per display.
4. The White luminance uniformity on LCD surface is then expressed as : $\Delta Y = \text{Minimum Luminance of 5(or 13) points} / \text{Maximum Luminance of 5(or 13) points.}$ (see Figure 8 and Figure 9).
5. The color chromaticity coordinates specified in Table 5 shall be calculated from the spectral data measured with all pixels first in red, green, blue and white. Measurements shall be made at the center of the panel.
6. The electro-optical response time measurements shall be made as Figure 10 by switching the "data" input signal ON and OFF. The times needed for the luminance to change from 10% to 90% is T_r , and 90% to 10% is T_f .
7. Cross-Talk of one area of the LCD surface by another shall be measured by comparing the luminance (YA) of a 10 ± 1 mm diameter area, with all display pixels set to gray 127(of 0 to 255), to the luminance (YB) of that same area when any adjacent area is driven dark. The luminance ratio shall not exceed 1:1.05 (See Figure 11).

4.3 Optical Measurements

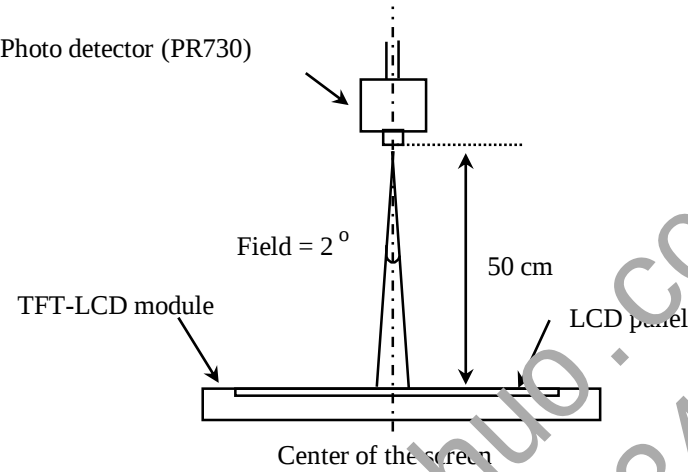

Optical characteristics measurement setup

Figure 7. Measurement Set Up

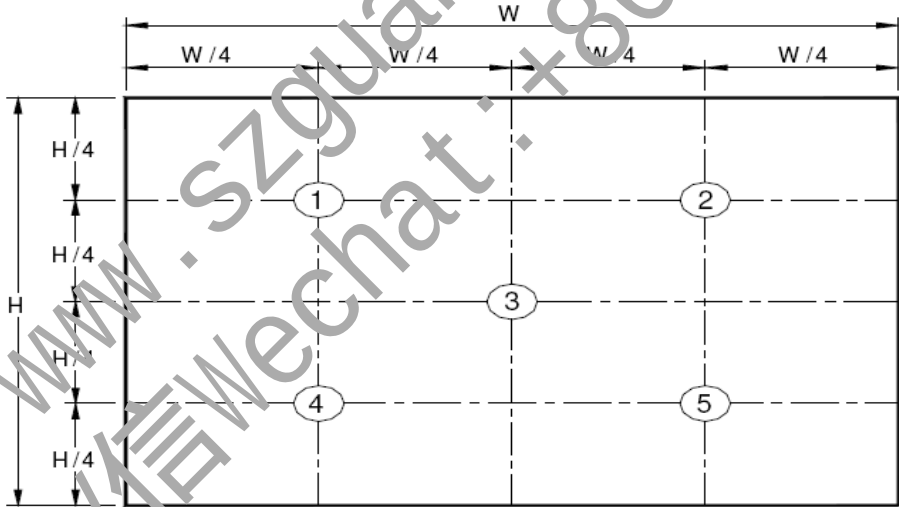


Figure 8. White Luminance and Uniformity Measurement Locations (5 points)

Center Luminance of white is defined as luminance values of center 5 points across the LCD surface. Luminance shall be measured with all pixels in the view field set first to white. This measurement shall be taken at the locations shown in Figure 7 for a total of the measurements per display.

Customer Spec

Rev. P1

2019.05.06

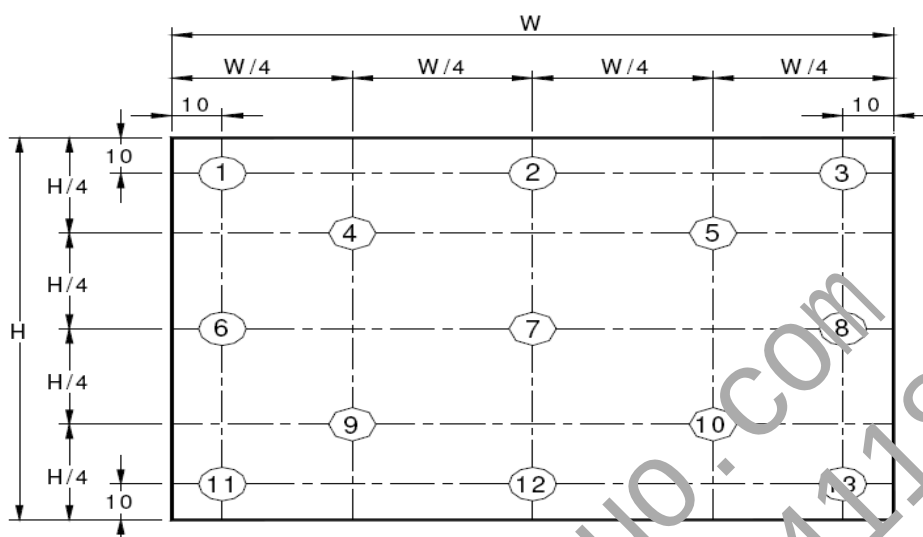


Figure 9. Uniformity Measurement Locations (13 points)

The White luminance uniformity on LCD surface is then expressed as : $\Delta Y5$ = Minimum Luminance of five points / Maximum Luminance of five points (see Figure 8), $\Delta Y13$ = Minimum Luminance of 13 points / Maximum Luminance of 13 points (see Figure 9).


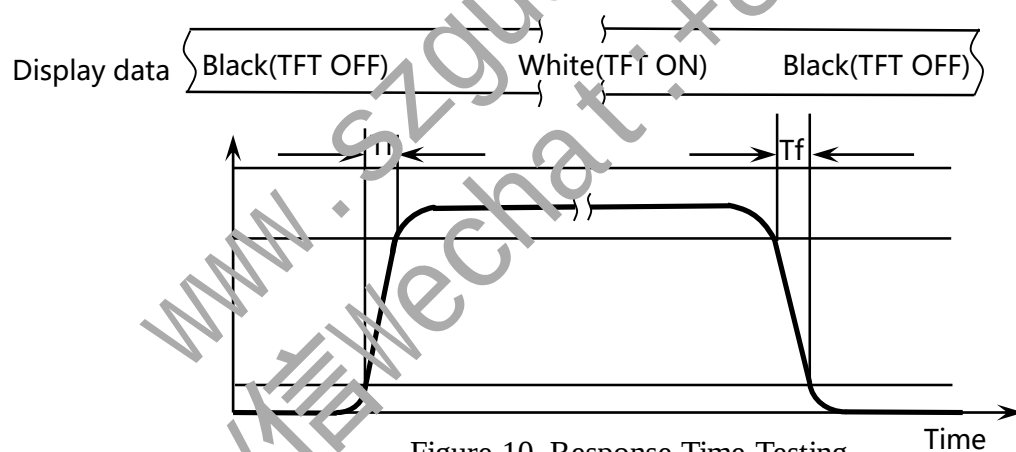


Figure 10. Response Time Testing

The electro optical response time measurements shall be made as shown in Figure 10 by switching the “data” input signal ON and OFF. Tf: The luminance to change from 90% to 10% ,Tr: The luminance to change from 10% to 90% .

The test system : PR810

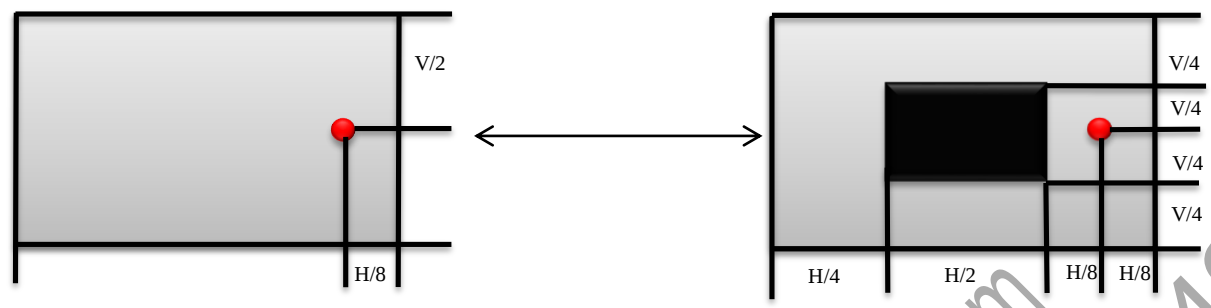

$$\text{Cross Talk (\%)} = \left| \frac{Y_B - Y_A}{Y_B} \right| \times 100$$

Figure 11. Cross Talk Modulation Test Description

Where:

- Y_A = Initial luminance of measured area (cd/m²)
- Y_B = Subsequent luminance of measured area (cd/m²)

The location 1/2/3/4 measured will be exactly the same in both patterns. The test background gray is from L64 to L192.Take the largest data as the result.

Cross Talk of one area of the LCD surface by another shall be measured by comparing the luminance (YA) of a 25mm diameter area, with all display pixels set to a gray level, to the luminance (YB) of that same area when any adjacent area is driven dark.(Refer to Figure 11)

The test system: PR730

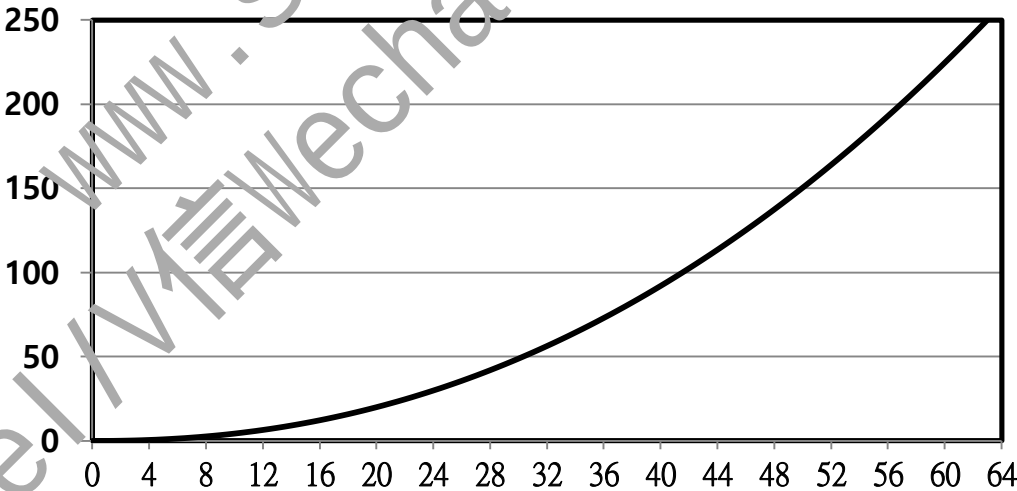


Figure 12. Brightness and Gray-scale Contrast

5.0 INTERFACE CONNECTION

5.1 Electrical Interface Connection

The electronics interface connector is 20455-040E-66.

The connector interface pin assignments are listed in Table 6.

<Table 6. Pin Assignments for the Interface Connector>

PIN NO	Symbol Function	Description	PIN NO	Symbol Function	Description
1	NC	No Connect (Reserved for DCR Enable Function)	21	BL_GND	Backlight ground
2	H_GND	High Speed Ground	22	BL_Enable	Backlight On / Off
3	Lane1_N	Comp Signal Link Lane 1	23	BL_PWM_DIM	System PWM signal Input
4	Lane1_P	True Signal Link Lane 1	24	NC	No connect (Reverse for TEST only)
5	H_GND	High Speed Ground	25	NC	No connect (Reverse for TEST only)
6	Lane0_N	Comp Signal Link Lane 0	26	BL_PWR	Backlight power (5V~21V)
7	Lane0_P	True Signal Link Lane 0	27	BL_PWR	Backlight power (5V~21V)
8	H_GND	High Speed Ground	28	BL_PWR	Backlight power (5V~21V)
9	AUX_CH_P	True Signal Auxiliary Ch.	29	BL_PWR	Backlight power (5V~21V)
10	AUX_CH_N	Comp Signal Auxiliary Ch.	30	NC	No Connect (Reserved for CM)
11	H_GND	High Speed Ground	31	NC	No Connect (Reserved for USB DATA- For Touch)
12	LCD_VCC	LCD logic and driver power	32	NC	No Connect (Reserved for USB DATA+ For Touch)
13	LCD_VCC	LCD logic and driver power	33	GND	Ground Shield
14	LCD_Self_Test	LCD Panel Self Test Enable (Optional)	34	VTSP	Touch panel power supply (3.3V)
15	LCD_GND	LCD logic and driver ground	35	VTSP	Touch panel power supply (3.3V)
16	LCD_GND	LCD logic and driver ground	36	TP_EN	Touch Function Enable Pin
17	HPD	HPD signal pin	37	TP_CLK	I2C Clock for Touch
18	BL_GND	Backlight ground	38	TP_Data	I2C Data for Touch
19	BL_GND	Backlight ground	39	INT	Interrupt for Touch
20	BL_GND	Backlight ground	40	RST	Reset for Touch

5.2 eDP Interface

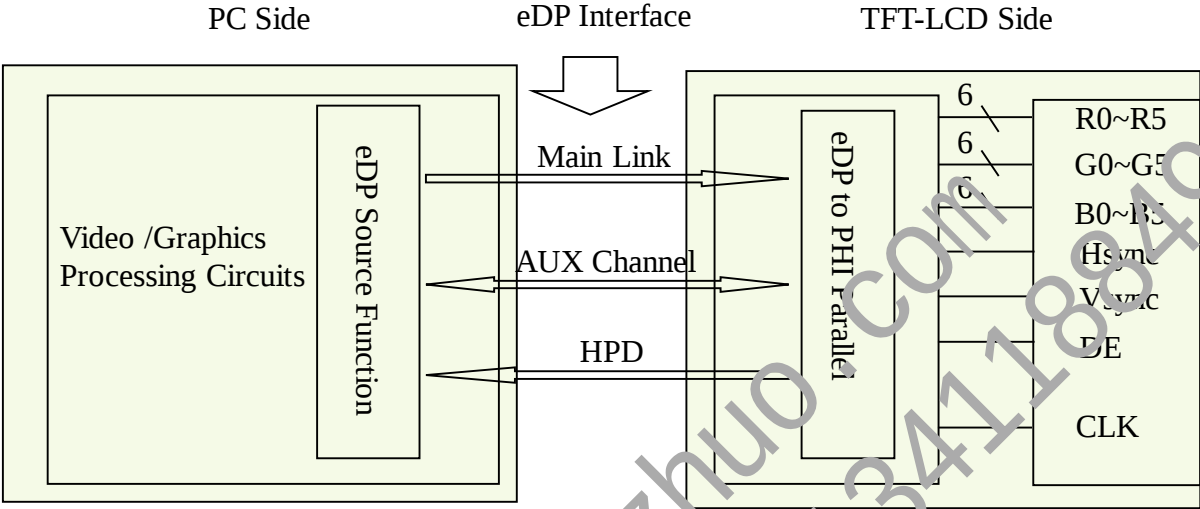


Figure 13. eDP Interface Architecture

Note:
 Transmitter : Parade DP501 or equivalent
 Transmitter is not contained in module.

5.3 Data Input Format

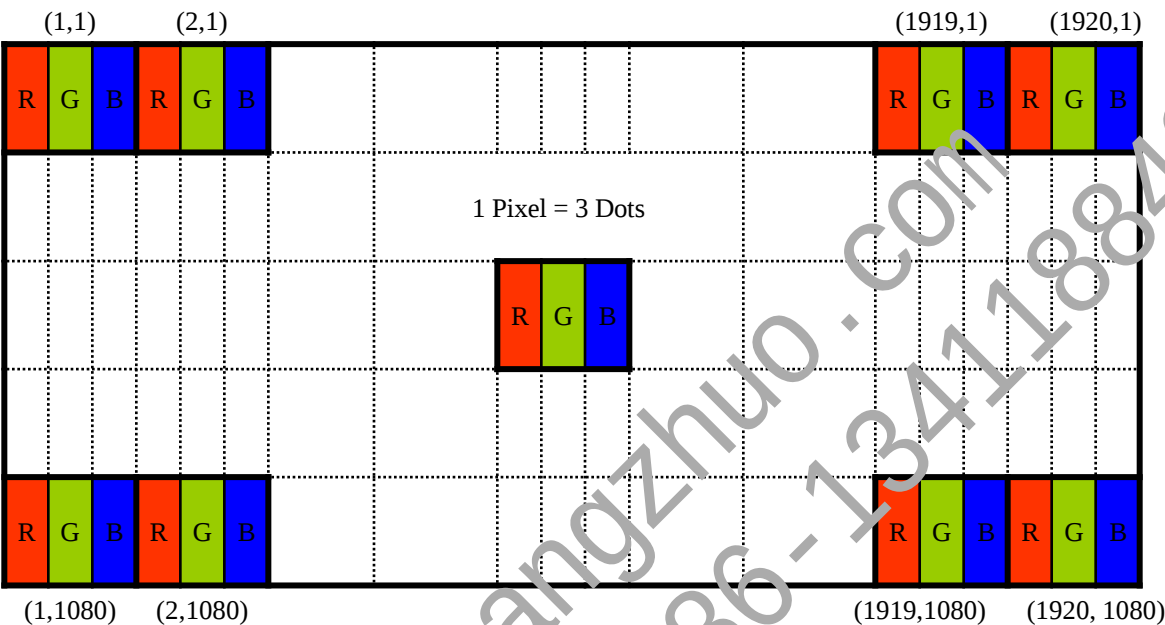


Figure 14 Display Position of Input Data (V-H)

5.4 Back-light & LCM Interface Connection

BLU Interface Connector: STM MSK24022P10.

<Table 7. Pin Assignments for the BLU Connector>

Pin No.	Symbol	Description	Pin No.	Symbol	Description
1	Vout	LED anode connection	6	NC	NC Connection
2	Vout	LED anode connection	7	LED1	LED cathode connection
3	Vout	LED anode connection	8	LED2	LED cathode connection
4	NC	NC	9	LED3	LED cathode connection
5	NC	NC	10	LED4	LED cathode connection

6.0 SIGNAL TIMING SPECIFICATION

6.1 The NV156FHM-T04 Is Operated By The DE Only

< Table 8. Signal Timing Specification >

Item		Symbols	Min	Typ	Max	Unit
Clock	Frequency	1/Tc	146.5	150.5	154.5	MHz
Frame Period		Tv	1120	1140	1160	lines
			-	60	-	Hz
			-	16.67	-	ms
Vertical Display Period		Tvd	-	1080	-	lines
One line Scanning Period		Th	2180	2200	2220	clocks
Horizontal Display Period		Thd	-	1920	-	clocks

Note : The above is as optimized setting.

6.2 eDP Rx Interface Timing Parameter

The specification of the eDP Rx interface timing parameter is shown in Table 9.1

<Table 9. eDP Main-Link RX TP4 Package Pin Parameters>

Item	Symbol	Min	Typ	Max	Unit	Remark
Spread spectrum clock (Link clock down-spreading)	SSC	0	-	0.5	%	
Differential peak-to-peak input voltage at package pins	VRX-DIFFp-p	100	-	1320	mV	
Rx input DC common mode voltage	VRX_DC_CM	0	-	2	V	
Differential termination resistance	RRX-DIFF	80	100	120	Ω	
Single-ended termination resistance	RRX-SE	40	-	60	Ω	
Rx short circuit current limit	IRX_SHORT	-	-	50	mA	
Intra-pair skew at Rx package pins (HBR) RX intra-pair skew tolerance at HBR	LRX_SKEW_INTRA_PAIR	-	-	60	ps	


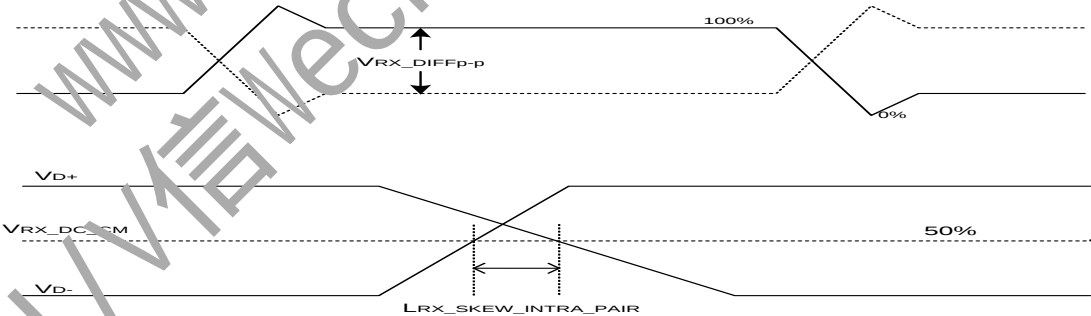


Figure 15. VRX-DIFFp-p & LRX_SKEW_INTRA_PAIR

6.3 Touch Interface Timing Parameter

The specification of the Touch interface timing parameter is shown in Table 9.2

<Table 10.2 Touch Interface Timing Specification>

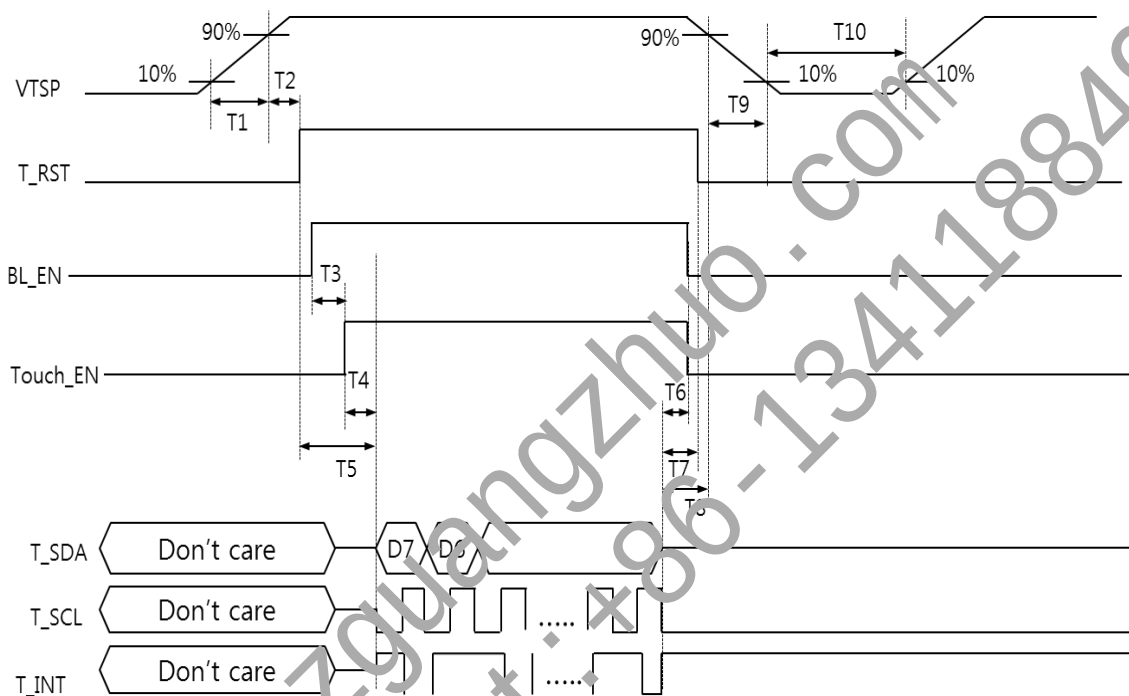

- 0ms $\leq$ T1
- 400us $\leq$ T2
- 0ms $\leq$ T3 $\leq$ 50ms
- 325ms $\leq$ T4
- 425ms $\leq$ T5

- 0ms $\leq$ T6
- 5ms $\leq$ T7/T8
- 50us $\leq$ T9
- 12us $\leq$ T10

7.0 INPUT SIGNALS, BASIC DISPLAY COLORS & GRAY SCALE OF COLORS

<Table 10. Input Signal & Basic Display Colors & Gray Scale of Colors >

	Colors & Gray scale	Data signal																	
		R0	R1	R2	R3	R4	R5	G0	G1	G2	G3	G4	G5	B0	B1	B2	B3	B4	B5
Basic colors	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1
	Green	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
	Light Blue	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1
	Red	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	Purple	1	1	1	1	1	1	0	0	0	0	0	0	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Gray scale of Red	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Darker	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	↑ ↓						↑ ↓						↑ ↓					
	▽																		
	Brighter	1	0	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	▽	0	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	Red	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
Gray scale of Green	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0
	Darker	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0
	△	↑ ↓						↑ ↓						↑ ↓					
	▽																		
	Brighter	0	0	0	0	0	0	1	0	1	1	1	1	0	0	0	0	0	0
	▽	0	0	0	0	0	0	0	1	1	1	1	1	0	0	0	0	0	0
	Green	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
Gray scale of Blue	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0
	Darker	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0
	△	↑ ↓						↑ ↓						↑ ↓					
	▽																		
	Brighter	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	1	1	1
	▽	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1
Gray scale of White & Black	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	1	0	0	0	0	0	1	0	0	0	0	0	1	0	0	0	0	0
	Darker	0	1	0	0	0	0	0	1	0	0	0	0	0	1	0	0	0	0
	△	↑ ↓						↑ ↓						↑ ↓					
	▽																		
	Brighter	1	0	1	1	1	1	1	0	1	1	1	1	1	0	1	1	1	1
	▽	0	1	1	1	1	1	0	1	1	1	1	1	0	1	1	1	1	1
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1

8.0 POWER SEQUENCE

To prevent a latch-up or DC operation of the LCD module, the power on/off sequence shall be as shown in below.

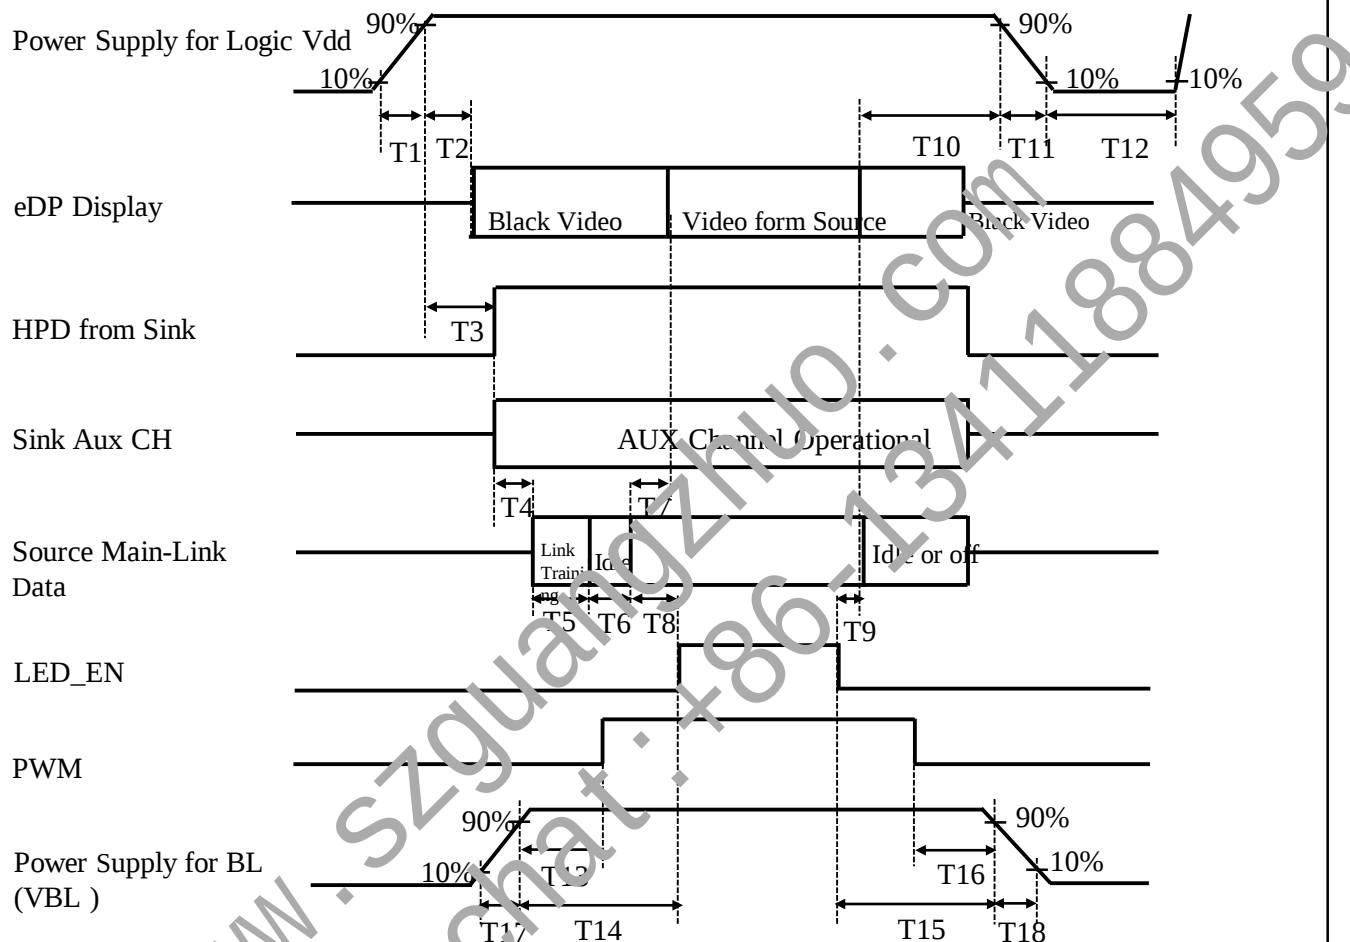


Figure 16. Power Sequence

- $0.5\text{ms} \leq T1 \leq 10\text{ms}$
- $0\text{ms} < T2 \leq 200\text{ms}$
- $0\text{ms} < T3 \leq 200\text{ms}$
- $T3+T4+T5+T6+T8 > 200\text{ms}$
- $0\text{ms} < T7 \leq 50\text{ms}$
- $50\text{ms} < T8$
- $0\text{ms} < T9$
- $0\text{ms} < T10 < 500\text{ms}$
- $0.5\text{ms} \leq T11 \leq 10\text{ms}$
- $500\text{ms} \leq T12$
- $0\text{ms} < T13$
- $0\text{ms} < T14$
- $0\text{ms} < T15$
- $0\text{ms} < T16$
- $0.5\text{ms} \leq T17$
- $0.5\text{ms} \leq T18$

Notes

1. When the power supply VDD is 0V, keep the level of input signals on the low or keep high impedance.
2. Do not keep the interface signal high impedance when power is on. Back Light must be turn on after power for logic and interface signal are valid.

9.0 Connector Description

Physical interface is described as for the connector on LCM.
 These connectors are capable of accommodating the following signals and will be following components.

9.1 TFT LCD Module

< Table 11. Signal Connector >

Connector Name /Description	For Signal Connector
Manufacturer	IPEX
Type/ Part Number	20455-040E-66
Mating Housing/ Part Number	20454-30T


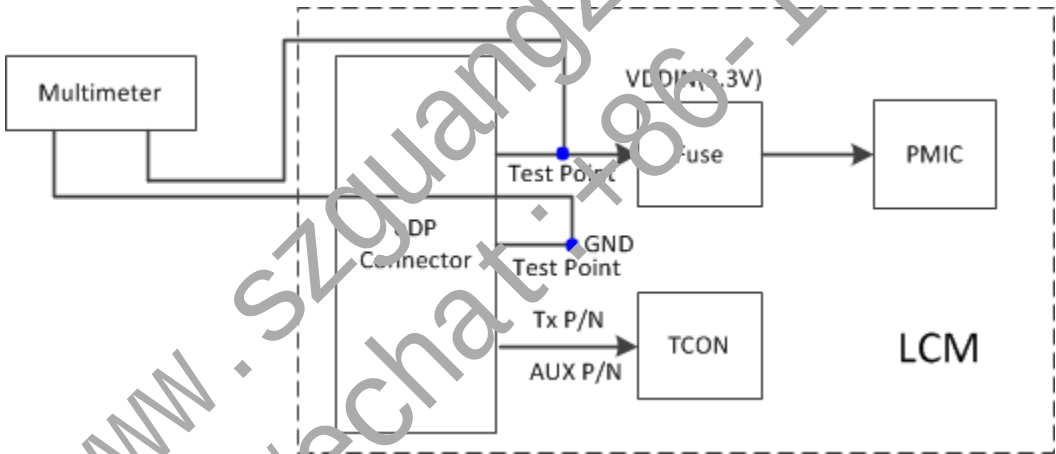


Figure 17. RC Loading test schematic diagram

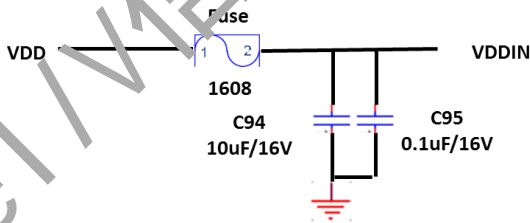

Item	RC Loading	
	R	C
	18k	27uF

Figure 18. VCC Loop R/C Loading Parameter

BOE	www.szguangzhuo.com 广卓液晶屏 echodeng61@hotmail.com jimei@jimeihk.com +86-13411884959	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec		Rev. P1	2019.05.06

10.0 MECHANICAL CHARACTERISTICS

10.1 Dimensional Requirements

Figure 23 shows mechanical outlines for the model NV156FHM-T04.
Other parameters are shown in Table 12.

<Table 12. Dimensional Parameters>

Parameter	Specification	Unit
Active Area	344.16 (H) ×193.59 (V)	mm
Number of pixels	1920 (H) X 1080 (V) (1 pixel = R + G + B dots)	pixels
Pixel pitch	179.25 (H) X 179.25 (V)	um
Pixel arrangement	RGB Vertical stripe	
Display colors	262 K(6bit)	
Display mode	Normally Black	
Dimensional outline	350.66(H) ×216.15(V) (V/PCB) ×3.18mm (panel side) 3.38mm(PCBA side)	mm
Weight	385 (max)	g

10.2 Mounting

See Figure 20.

10.3 Anti-Glare and Polarizer Harness.

The surface of the LCD has an **Anti-Glare** coating to minimize reflection and to reduce scratching.

10.4 Light Leakage

There shall not be visible light from the back-lighting system around the edges of the screen as seen from a distance 50cm from the screen with an overhead light level of 350lux.

SPEC. NUMBER	SPEC. TITLE	PAGE
www.szguangzhuo.com 广卓液晶屏 echodeng61@hotmail.com jimei@jimeihk.com +86-13411884959	NV156FHM-T04 Product Specification Rev. P1	27 Of 37

11.0 RELIABILITY TEST

The reliability test items and its conditions are shown in below.

<Table 13. Reliability Test>

No	Test Items	Conditions
1	High temperature storage test	Ta = 60°C , 60%RH, 240 hrs
2	Low temperature storage test	Ta = -20°C , 240 hrs
3	High temperature & high humidity operation test	Ta = 50°C , 80%RH, 240 hrs
4	High temperature operation test	Ta = 50°C , 60%RH, 240 hrs
5	Low temperature operation test	Ta = 0°C , 240 hrs
6	Thermal shock	Ta = -20 °C → 60 °C (0.5 h), 60%±3%RH, 100 cycle
7	Vibration test (non-operating)	Ta = 25°C , 60%RH ± 5C, 10~500Hz, Half Sine X,Y,Z / Sweep rate : 1 hour
8	Shock test (non-operating)	Ta = 25°C , 60%RH, 220G, Half Sine Wave 2msec±X,±Y,±Z Once for each direction
9	Electro-static discharge test (non-operating)	Air : 150 pF, 330Ω, 15 KV Contact : 150 pF, 330Ω, 8 KV Ta = 25°C , 60%RH,

12.0 HANDLING & CAUTIONS

(1) Cautions when taking out the module

- Pick the pouch only, when taking out module from a shipping package.

(2) Cautions for handling the module

- As the electrostatic discharges may break the LCD module, handle the LCD module with care. Peel a protection sheet off from the LCD panel surface as slowly as possible.
- As the LCD panel and back-light element are made from fragile glass material, impulse and pressure to the LCD module should be avoided.
- As the surface of the polarizer is very soft and easily scratched, use a soft dry cloth without chemicals for cleaning.
- Do not pull the interface connector in or out while the LCD module is operating.
- Put the module display side down on a flat horizontal plane.
- Handle connectors and cables with care.

(3) Cautions for the operation

- When the module is operating, do not lose CLK, ENAB signals. If any one of these signals is lost, the LCD panel would be damaged.
- Obey the supply voltage sequence. If wrong sequence is applied, the module would be damaged.

- (4) Cautions for the atmosphere

 - Dew drop atmosphere should be avoided.
 - Do not store and/or operate the LCD module in a high temperature and/or humidity atmosphere. Storage in an electro-conductive polymer packing pouch and under relatively low temperature atmosphere is recommended.
- (5) Cautions for the module characteristics

 - Do not apply fixed pattern data signal to the LCD module at product aging.
 - Applying fixed pattern for a long time may cause image sticking.
- (6) Other cautions

 - Do not disassemble and/or re-assemble LCD module.
 - Do not re-adjust variable resistor or switch etc.
 - When returning the module for repair or etc. Please pack the module not to be broken. We recommend to use the original shipping packages.

13.0 LABEL

(1) Product Label



Figure 16. Product Label

Module ID Naming Rule

<Table 14. Module ID Naming Rule>

Digit Code	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
Code	S	L	S	5	1	2	3	5	9	4	2	0	0	0	1	D	B
Description	Model Code /GBN		Grade	Line	Year		Month	Model Extension Code (Last 4 Digits Of FGCOD)				Serial No 00001-ZZZZZZ					

(2) High voltage caution label

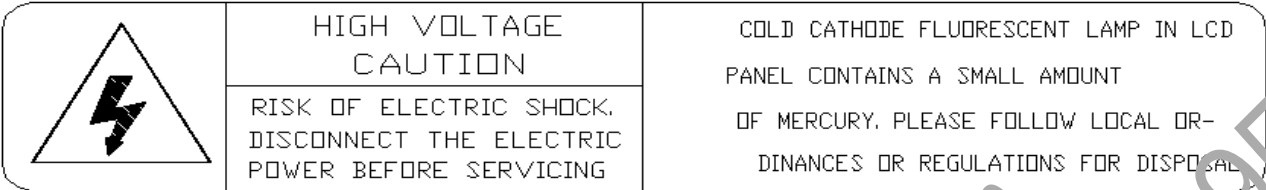


Figure 17. High Voltage Caution Label

(3) Box Label

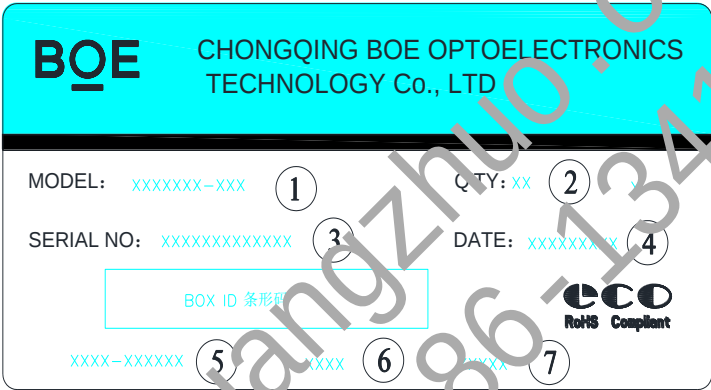


Figure 18. Box Label

Serial number marked part needs to print, show as follows:

1. FG-CODE(Before 12 bit)
2. Product quantity
3. Box ID
4. Date
5. The client section, material number(The client)---XXXXXXX-XXX
6. FG-Code After four ---8941
7. The supplier code
8. Total Size:100×50mm

<Table 15. Box Label Naming Rule >

Digit	1	2	3	4	5	6	7	8	9	10	11	12	13
Code	S	L	S	F	1	2	3	D	0	0	0	6	8
Description	Products GBN		Grade	Line	Year		Month	Revision Code	Serial No				

BOE	www.szguangzhuo.com 广卓液晶屏 echodeng61@hotmail.com jimei@jimeihk.com +86-13411884959	PRODUCT GROUP	REV	ISSUE DATE
		Customer Spec	Rev. P1	2019.05.06

14.0 PACKING INFORMATION

14.1 Packing Order

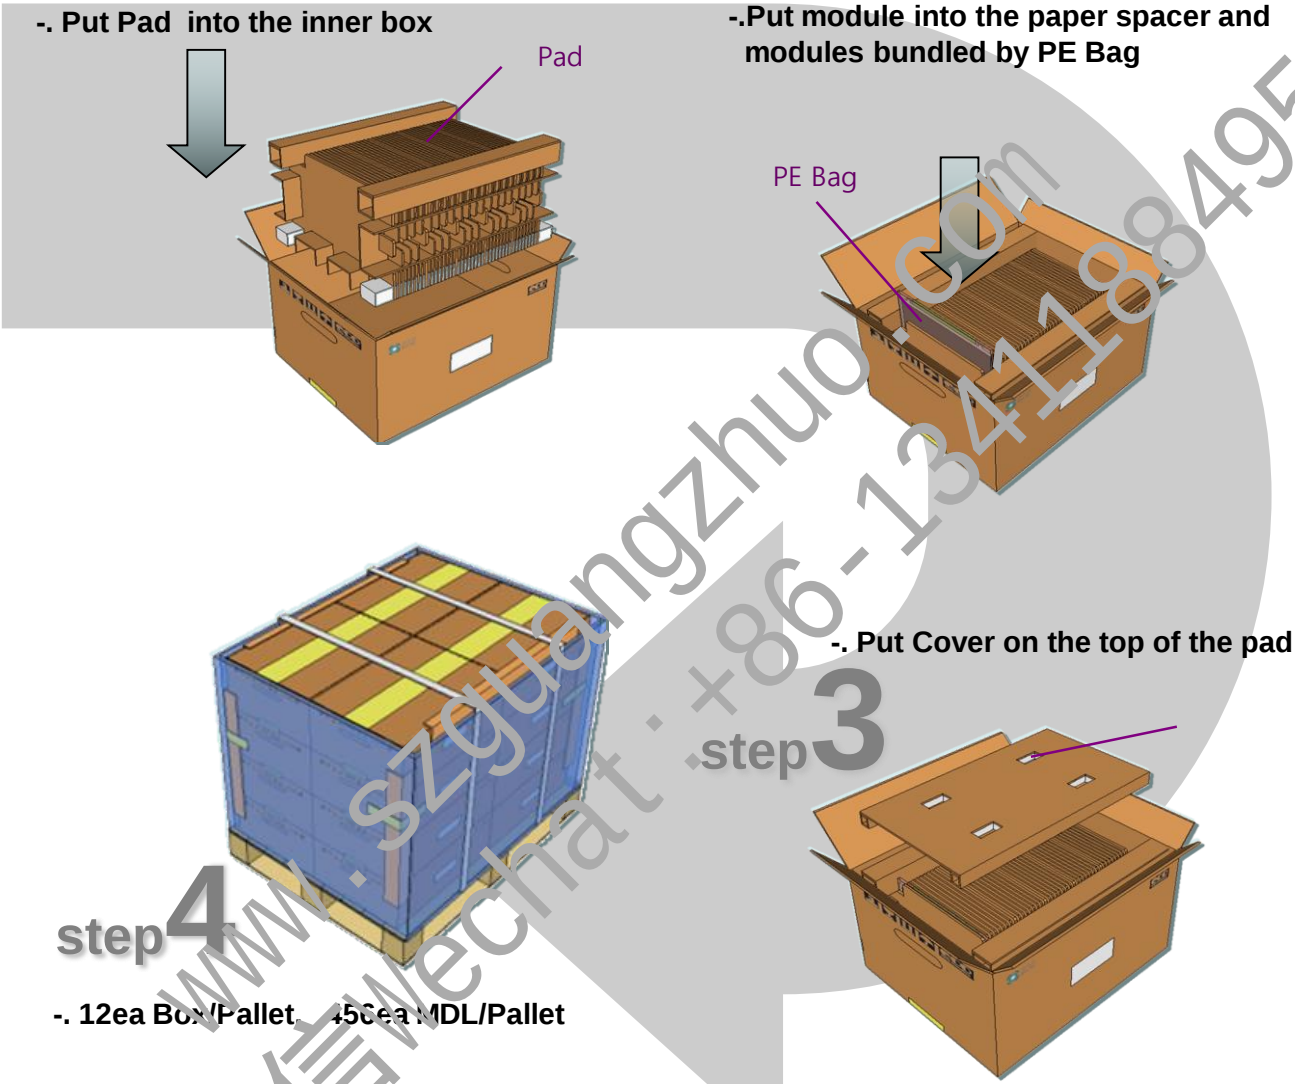


Figure 19. Packing Order

14.2 Note

- Box dimension: 480mm*350mm*285mm
- Package quantity in one box: 38pcs
- Total weight: 18.2kg/Box

SPEC. NUMBER	SPEC. TITLE	PAGE
www.szguangzhuo.com 广卓液晶屏 echodeng61@hotmail.com jimei@jimeihk.com +86-13411884959	NV156FHM-T04 Product Specification Rev. P1	31 OF 37

15.0 MECHANICAL OUTLINE DIMENSION

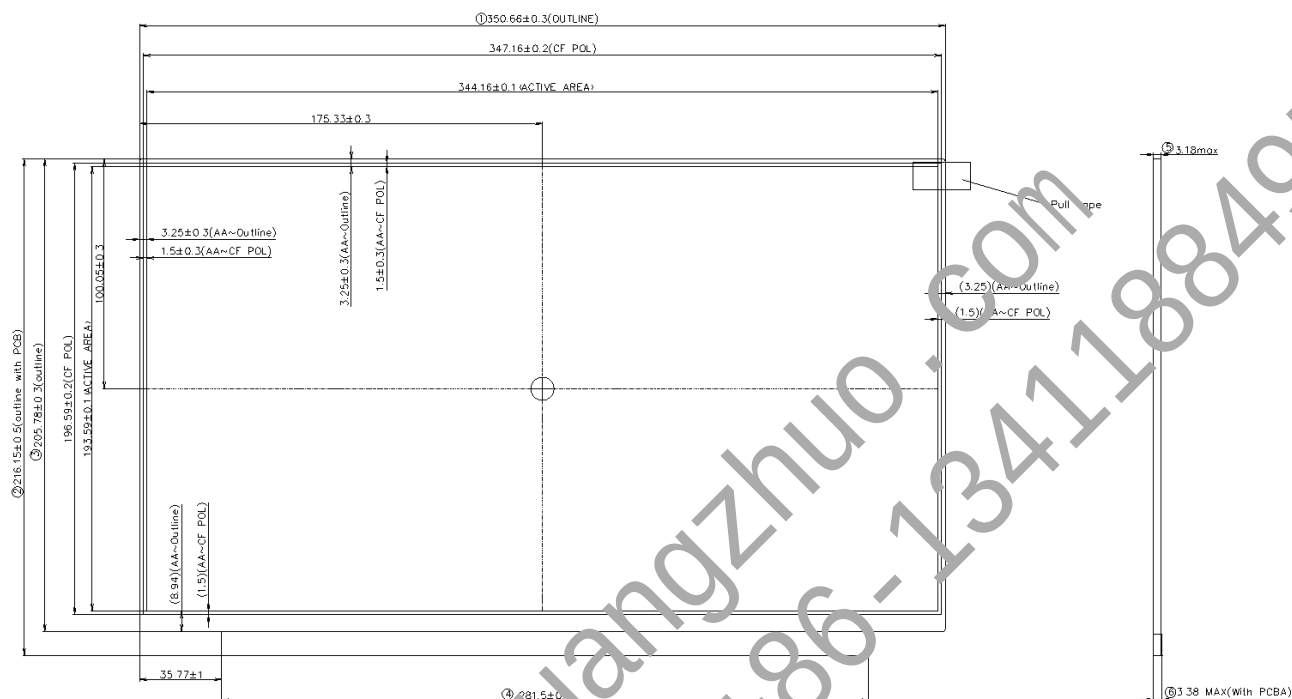


Figure 20. TFT-LCD Module Outline Dimension (Front View)

Note:

1. Warps And Deformation spec 0.5mm Max.
2. EDP connector is measured at PIN 1 and MATING LINE.
3. Key dimensions: ① -⑧
4. The MDL dimensions measure tool is Vernier Caliper.
5. Top Pol must be the highest portion in bottom including PCBA.

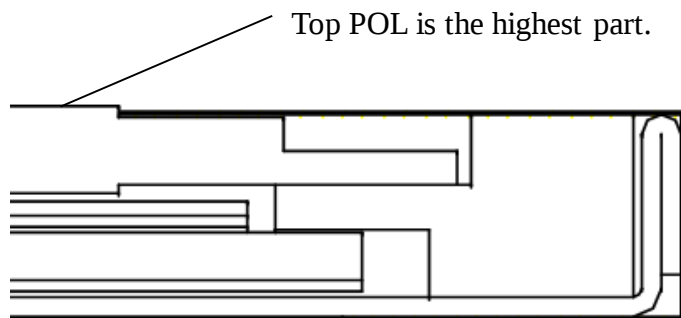


Figure 21. Highest Point Position

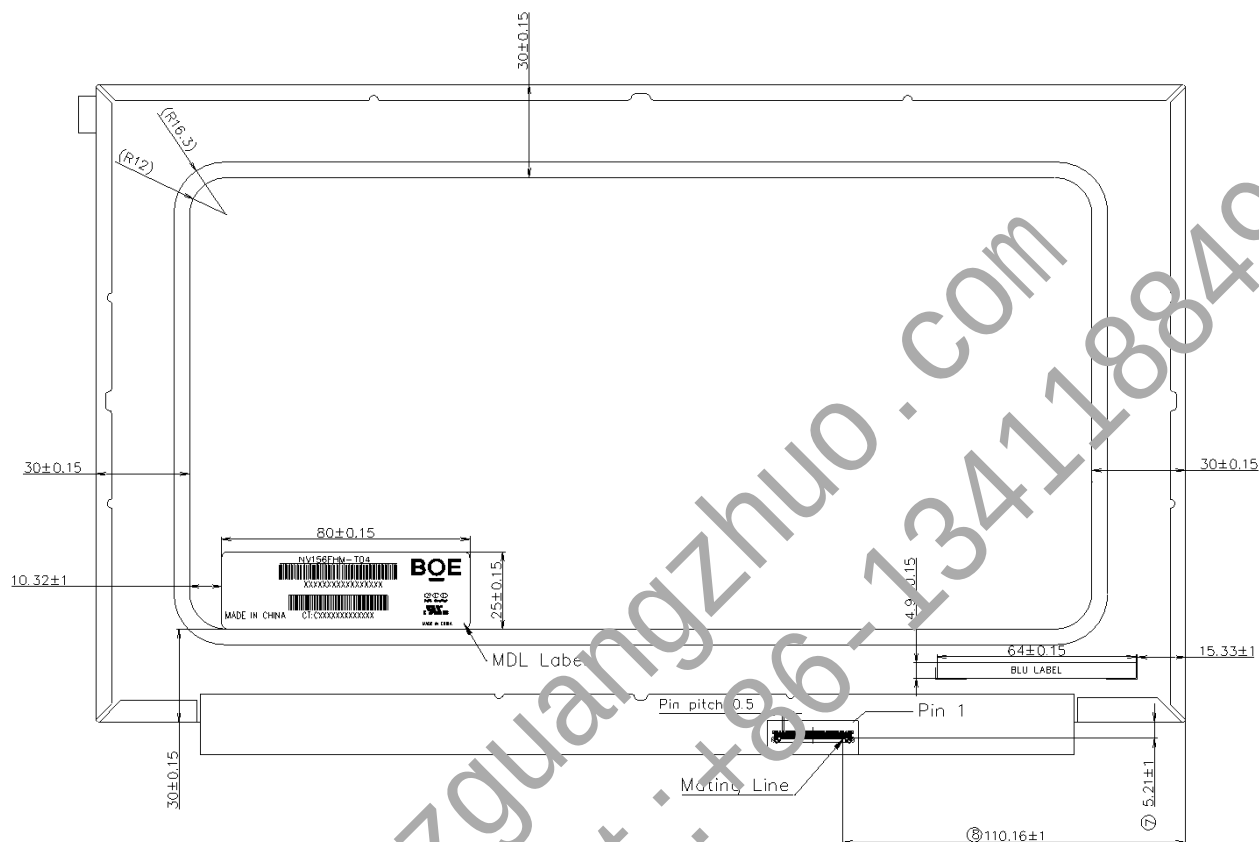


Figure 22. TFT-LCD Module Outline Dimensions (Rear view)

Note:

1. Warps And Deformation spec 0.5mm Max.
2. EDP connector is measured at PIN 1 and MATING LINE.
3. Key dimensions. ① - ③
4. The MDL dimensions measure tool is Vernier Caliper.
5. Top Pol must be the highest portion in bottom including PCBA.

16.0 EDID Table

Address (HEX)	Function	Hex	Dec	Input values.	Notes
00	Header	00	0	0	EDID Header
01		FF	255	255	
02		FF	255	255	
03		FF	255	255	
04		FF	255	255	
05		FF	255	255	
06		FF	255	255	
07		00	0	0	
08	ID Manufacturer Name	09	9	BOE	ID = BOE
09		E5	229		
0A	ID Product Code	EE	238	2030	ID = 2030
0B		07	7		
0C	32-bit serial No.	00	0	0	
0D		00	0	0	
0E		00	0	0	
0F		00	0	0	
10	Week of manufacture	01	1	1	
11	Year of Manufacture	1C	28	2018	Manufactured in 2018
12	EDID Structure Ver.	01	1	1	EDID Ver. 1.0
13	EDID revision #	04	4	4	EDID Rev. 0.4
14	Video input definition	35	149	-	Refer to right table
15	Max H image size	22	34	34	34.416 cm (Approx)
16	Max V image size	13	19	19	19.359 cm (Approx)
17	Display Gamma	78	120	2.2	Gamma curve = 2.2
18	Feature support	03	3	-	Refer to right table
19	Red/Green low bits	24	36	-	Red / Green Low Bits
1A	Blue/White low bits	10	16	-	Blue / White Low Bits
1B	Red x high bits	97	151	0.590	Red (x) = 10010111 (0.59)
1C	Red y high bits	59	89	0.350	Red (y) = 01011001 (0.35)
1D	Green x high bits	54	84	0.330	Green (x) = 01010100 (0.33)
1E	Green y high bits	8E	142	0.555	Green (y) = 10001110 (0.555)
1F	Blue x high bits	27	39	0.153	Blue (x) = 00100111 (0.153)
20	Blue y high bits	1E	30	0.119	Blue (y) = 00011110 (0.119)
21	White x high bits	50	80	0.313	White (x) = 01010000 (0.313)
22	White y high bits	54	84	0.329	White (y) = 01010100 (0.329)
23	Established timing 1	00	0	-	Refer to right table
24	Established timing 2	00	0	-	
25	Established timing 3	00	0	-	

BOE		PRODUCT GROUP			REV	ISSUE DATE
		Customer Spec			Rev. P1	2019.05.06
26	Standard timing #1	01	1		Not Used	
27		01	1			
28	Standard timing #2	01	1		Not Used	
29		01	1			
2A	Standard timing #3	01	1		Not Used	
2B		01	1			
2C	Standard timing #4	01	1		Not Used	
2D		01	1			
2E	Standard timing #5	01	1		Not Used	
2F		01	1			
30	Standard timing #6	01	1		Not Used	
31		01	1			
32	Standard timing #7	01	1		Not Used	
33		01	1			
34	Standard timing #8	01	1		Not Used	
35		01	1			
36	Detailed timing monitor descriptor #1	C8	200	150.5	150.48MHz Main clock	
37		3A	58			
38		80	120	1920	Hor Active = 1920	
39		18	24	280	Hor Blanking = 280	
3A		71	113		4 bits of Hor. Active + 4 bits of Hor. Blanking	
3B		30	56	1080	Ver Active = 1080	
3C		3C	60	60	Ver Blanking = 60	
3D		40	64	-	4 bits of Ver. Active + 4 bits of Ver. Blanking	
3E		30	48	48	Hor Sync Offset = 48	
3F		20	32	32	H Sync Pulse Width = 32	
40		36	54	3	V sync Offset = 3 line	
41		00	0	6	V Sync Pulse width : 6 line	
42		58	88	344	Horizontal Image Size = 344.16 mm (Low 8 bits)	
43		C2	194	194	Vertical Image Size = 193.59 mm (Low 8 bits)	
44		10	16	-	4 bits of Hor Image Size + 4 bits of Ver Image Size	
45		00	0	0	Hor Border (pixels)	
46	00	0	0	Vertical Border (Lines)		
47	1A	26	-	Refer to right table		
SPEC. NUMBER		SPEC. TITLE				PAGE
www.szguangzhuo.com 广卓液晶屏 echodeng61@hotmail.com jimei@jimeihk.com +86-13411884959		NV156FHM-T04 Product Specification Rev. P1				35 Of 37

BOE		PRODUCT GROUP			REV	ISSUE DATE
		Customer Spec			Rev. P1	2019.05.06
48	Detailed timing/monitor descriptor #2	30	48	100.3	100.32MHz Main clock	
49		27	39			
4A		80	128	1920	Hor Active = 1920	
4B		18	24	280	Hor Blanking = 280	
4C		71	113	-	4 bits of Hor. Active + 4 bits of Hor. Blanking	
4D		38	56	1080	Ver Active = 1080	
4E		3C	60	60	Ver Blanking = 60	
4F		40	64	-	4 bits of Ver. Active + 4 bits of Ver. Blanking	
50		30	48	48	Hor Sync Offset = 48	
51		20	32	32	H Sync Pulse Width = 32	
52		36	54	3	V sync Offset = 3 line	
53		00	0	6	V Sync Pulse width : 6 line	
54		58	88	344	Horizontal Image Size = 344.16 mm (Low 8 bits)	
55		C2	194	194	Vertical Image Size = 193.59 mm (Low 8 bits)	
56		10	16	-	4 bits of Hor Image Size + 4 bits of Ver Image Size	
57		00	0	0	Hor Border (pixels)	
58		00	0	0	Vertical Border (Lines)	
59		1A	26	-	Refer to right above table	
5A	Detailed timing/monitor descriptor #3	00	0	Nvidia nvDPS (Refer the tab of nvDPS) Lowest refresh rate that does not cause any visual/optical side effect		
5B		00	0			
5C		00	0			
5D		00	0			
5E		00	0			
5F		00	0			
60		00	0			
61		00	0			
62		00	0			
63		00	0			
64		00	0			
65		00	0			
66		00	0			
67		00	0			
68	00	0				
69	00	0				
6A	00	0				
6B	00	0				
SPEC. NUMBER		SPEC. TITLE				PAGE
www.szguangzhuo.com 广卓液晶屏 echodeng61@hotmail.com jimei@jimeihk.com +86-13411884959		NV156FHM-T04 Product Specification Rev. P1				36 Of 37

Customer Spec

Rev. P1

2019.05.06

6C	Detailed timing/monitor descriptor #4	00	0		Detailed Timing Description #4
6D		00	0		Flag
6E		00	0		Reserved
6F		02	2		For Brightness Table and Power consumption
70		00	0		Flag
71		0B	11	-	PWM % [7:0] @ Step 0
72		40	64	-	PWM % [7:0] @ Step 5
73		FF	255	-	PWM % [7:0] @ step 10
74		0A	10	-	Nits [7:0] @ Step 0
75		3C	60	-	Nits [7:0] @ Step 5
76		7D	125	-	Nits [7:0] @ Step 10
77		16	22	-	Panel Electronics Power @32x32 Chess Pattern = 900mW
78		16	22	-	Backlight Power @50 nits = 914.823529411765mW
79		2D	45	-	Backlight Power @Step 10 = 3600mW
7A		7D	125	-	Nits @ 100% PWM Duty = 250nit
7B		00	0		Format : terminate with ASCII code 0Ah and pad field with ASCII code 20h
7C		00	0		
7D		00	0		
7E	Extension flag	00	0	1	0 : 1個EDID ; N-1 : N个EDID
7F	Checksum	71	113	-	